

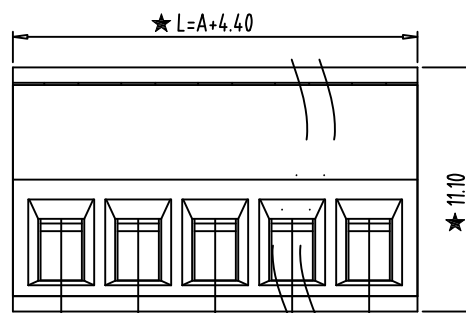
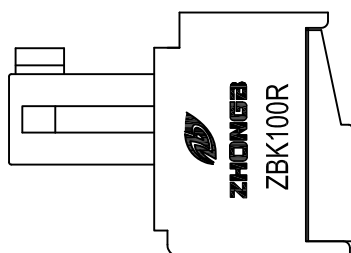
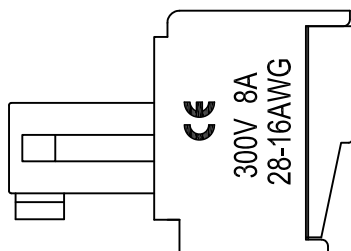
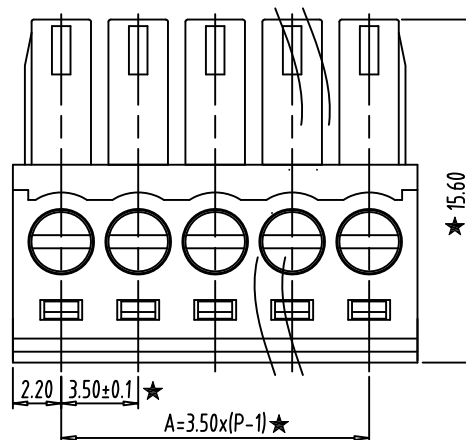


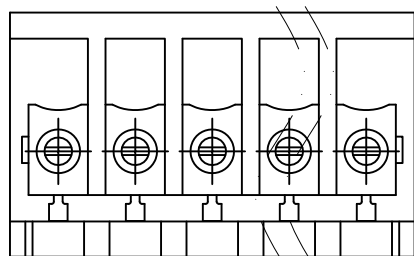

NOTES:

1. Rating: 300V 8A ;
2. Insulation Withstands Voltage: AC2000V/MIN
3. Insulation Resistance: 500MΩ or more at DC500V
4. Using Temperature Range: -40°C--+105°C
5. Screw Torque Value: 1.7 lbf.in
6. Suitable Electric Wire: 28-16AWG
7. "★" is the important dimension.

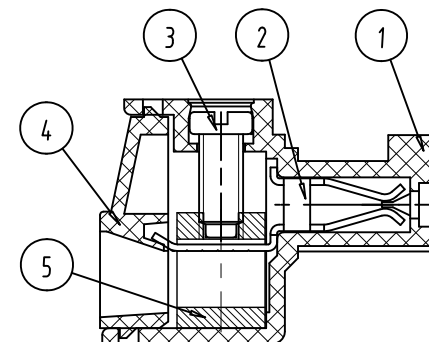

DIM	P	2	3	4	5	6	7	8	9	10	11	12	****
L	7.90	11.40	14.90	18.40	21.90	25.40	28.90	32.40	35.90	39.40	42.90	****	
A	3.50	7.00	10.50	14.00	17.50	21.00	24.50	28.00	31.50	35.00	38.50	****	

Total Pitch Tolerances in mm												Nominal dimension range in mm														
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 500	over 700	over 900	over 1150	over 1500	over 2000	over 2500	over 3000	over 3500	over 4000	over 4500	over 5000	over 5500	over 6000	all	over 0	over 100	over 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.3	0.2	0.3	0.5		

ITEM	NAME OF PART		NO. OF PART		Q"TY	MATERIAL			NOTE	
DWG.	SK	DATE	2014/11/08		SIZE	A4	UNITS	mm	SHEET/OF	1 / 1
CHK.		DATE			SCALE	3:1		15EDG-3.5		
APP.		DATE			NAME	ZBK100R-XXP-XS				
 ZHONGB NINGBO ZHONGBO PHOTOVOLTAIC TECHNOLOGY CO., LTD.					DWGNO.	ZB-02-ZBK100RXXPXS				