


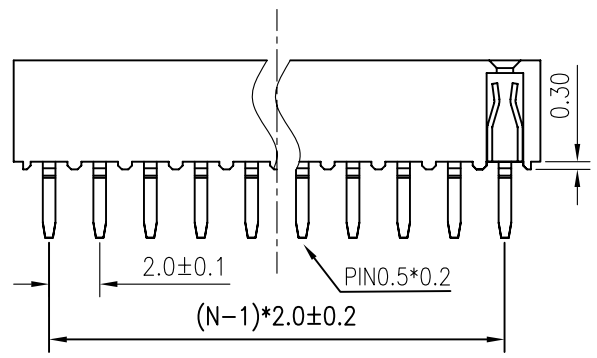


| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|-------------|---------------|---------|--------------|
| A | NEW RELEASE | LJH 09/22/05' | | LJC 05/09/06 |
| | | | | |
| | | | | |

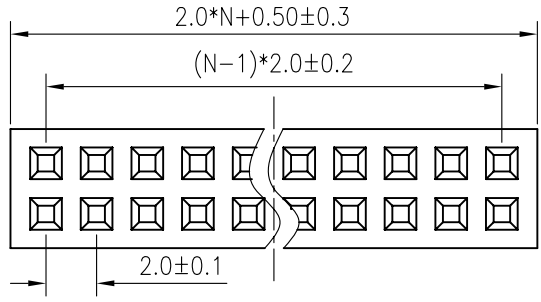

N: NUMBER OF CONTACTS/2



RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - OPERATING TEMPERATURE: 0°C~+85°C.
 - STORAGE TEMPERATURE: -20°C~+70°C.
- PART NUMBER: DS1026-05
- PRODUCT NUMBER CODE:

DS1026-05 - X X X X X

- CONTACTS TYPE
V:VERTICAL TYPE
- HOUSING COLOR
B:BLACK
- CONTACT PLATING
8: FULL GOLD FLASH
- CONNECTOR TYPE
S:SOCKET
- No.OF CONTACTS
2*2-2*X
- SERIES No.
DS1026-05

| | | | | | | |
|-------------------|-----------------|------------|----|--------|--------------------------------|--|
| GENERAL TOLERANCE | ANGLE TOLERANCE | PROJECTION | | TITLE | FEMALE HEADER PITCH 2.0mm TYPE | |
| X. ±0.60 | X. ±5' | UNITS | mm | | | |
| .X ±0.38 | .X ±3' | SHEET SIZE | A4 | SERIES | DS1026-05 SERIES | |
| .XX ±0.25 | .XX ±2' | | | | | |

| | | | | | | | |
|------|-----------|----------|---------------|------------|--------------|-------------------|--------------|
| 2 | CONTACT | | COPPER ALLOY | GOLD FLASH | DRAWING TYPE | CUSTOMER | |
| 1 | HOUSING | | THERMOPLASTIC | UL 94 V-0 | SCALE | 1:1 | SHEET 1 OF 1 |
| ITEM | PART NAME | PART NO. | MATERILAS | FINISHED | DRAWING NO. | C-DS1026-05-XXXXX | |