


ПЕРЕКЛЮЧАТЕЛЬ КНОПОЧНЫЙ СЕРИИ R16-503

ON-OFF

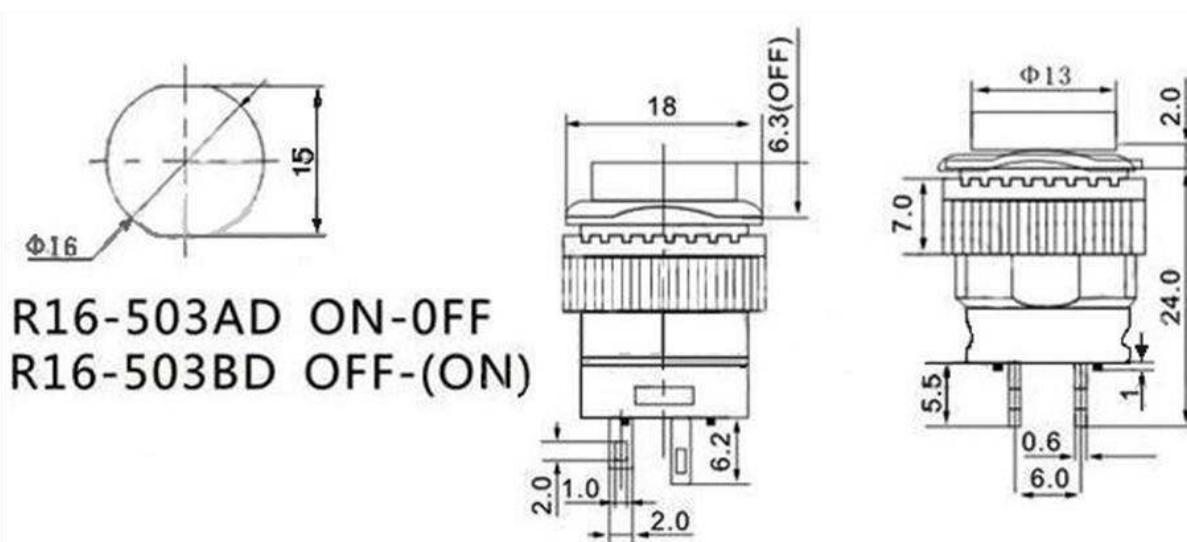

SPECIFICATIONS

Rating: 3A 250V AC

Contact R: 50mΩ max

Insulation R: 500V DC 1000MΩ min

Dielectric Strength: 1 Minute 1500V AC

Operating Temperature: -5°C ~ +55°C

Operating force: 150gf ±50gf

Electrical Life: 5, 000 Cycles

