

Tact Switch


Q-2502

TYPE: **TD-06XG**

SPECIFICATIONS

Contact Type	SPST
Rating	DC 12V, 50mA
Contacts Resistance	100mΩ max
Insulation Resistance	≥100MΩ Min
Dielectric Strengths	AC 250V / 1 minute
Life Test	100 000 Cycles Min
Operating temperature range	-30°C to +85°C
Operating Force	200±50 gf

Outline Drawing

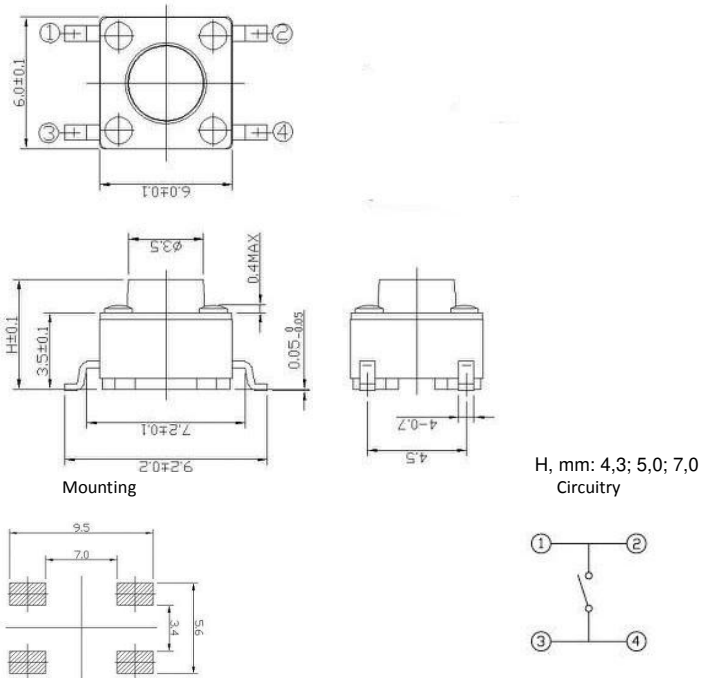

H, mm: 4,3; 5,0; 7,0
Circuitry

OFF – (ON)