


Q-9739

TYPE: **DS-402**


SPECIFICATIONS

Rating: 0,5A/125V AC
Contact R: 35mΩ max
Insulation R: 500V DC 100MΩ min
Dielectric Strength: 1 Minute 1000V AC
Operating Temperature: -25°C ~ +85°C
Electrical Life: 10, 000 Cycles


Outline Drawing

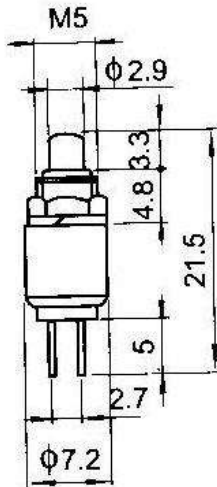

Mounting



Circuitry



OFF – (ON)
(SPST)