



КНОПКА ПЫЛЕВЛАГОЗАЩИЩЕННАЯ R13-563AL

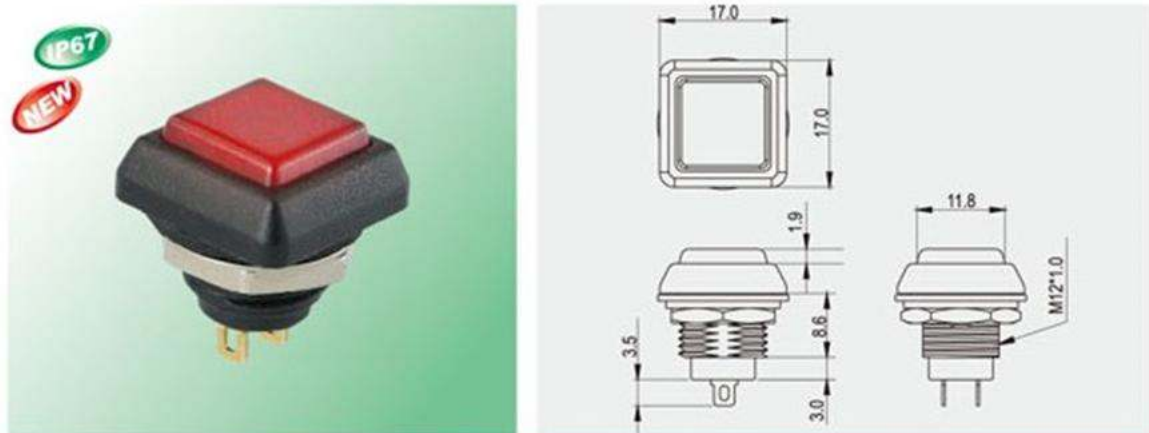

FEATURES

- * MATERIAL: Frame is nylon (UL flame: 94V-2). Terminals are silver plated brass Base is PBT.
- * Illuminated actuators are molded in PC, available with red, amber, green, blue and white colors.
- * Mounted by nut.
- * Same mounting hole as R13-556, but in different shape of bezel and button.

R13-563 ■ ■ - ■ ■

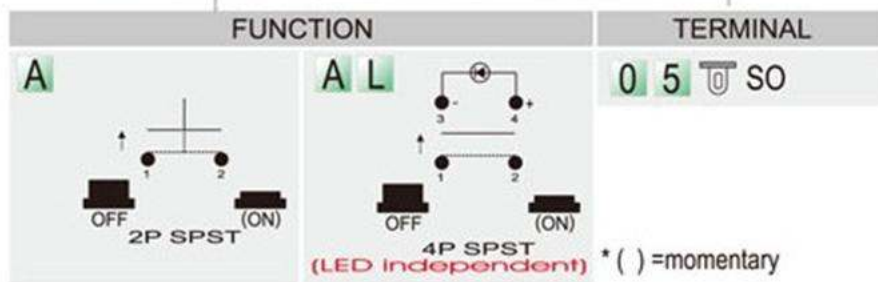

Rating
400mA 32V AC 125mA 125V AC
Contact resistance
50mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
AC 1000V 1 minute
Cut-out

