
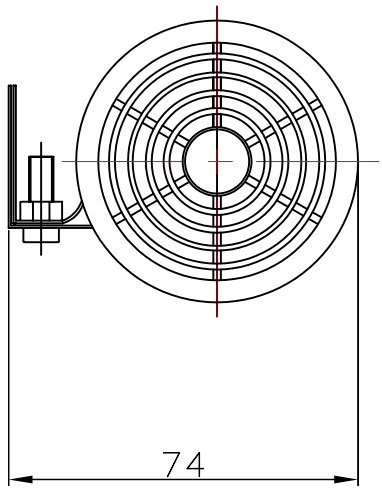


Specification

(Test Condition, 25 °C)

1. Housing Material/ Color..... ABS /Red
2. Rated Voltage 12 VDC
3. Range Voltage 6-15VDC
4. S.P.L. 100±3dB(at 1 meter, 12VDC)
5. Tone Nature pulse
6. Current Draw 75mA Max. (at 12 VDC)
7. Load Test 8 Hours (at 12 VDC)
8. Heat Test 8 Hours (at 85 °C)
9. Operating Temperature range -20 ~ +85 °C
10. Wires Connection Red +12V
Black GND
11. Weight 120 ±5 g

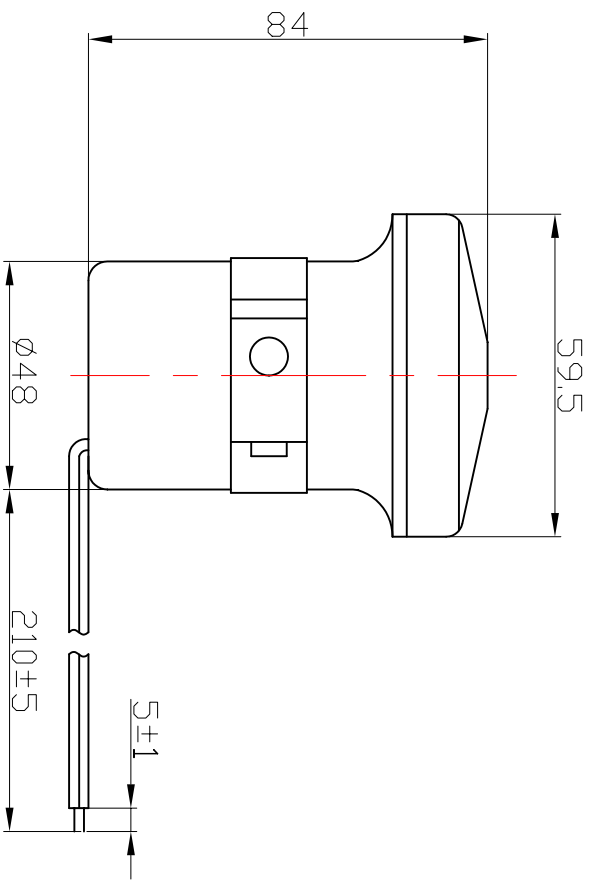

No.	DESCRIPTION	APPROVED	DATE	
TOLEIENGANGS/INLIS SOPHED/OTHERWISH		APPROVALS	DATE	
XXX #	DRAWN			
90° ANGLES ±0.2°	CHECKED			
FIRST ANGLE PROJECTION	APPROVED		03.04.29	
KEPO NINGBO KEEP IMPROVING ELECTRONIC CO.,LTD Electronic Siren KPS-6028 http://www.chinaacoustic.com		UNIT	DWG NO.	SHEET
		mm	KP3.840.417	VER 1.1
		SCALE	NOT TO SCALE	