
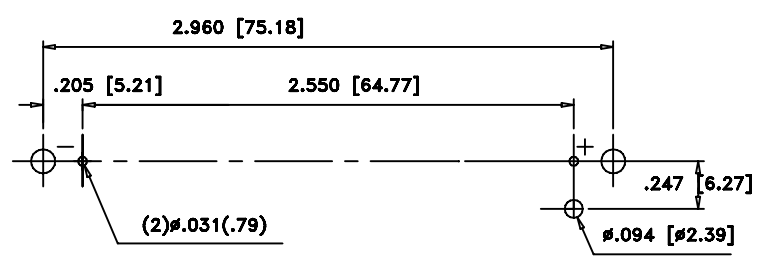
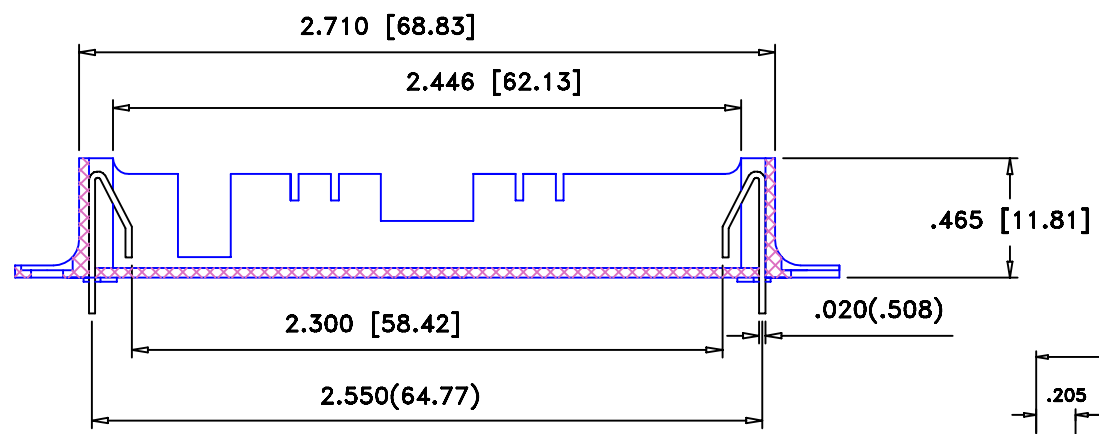
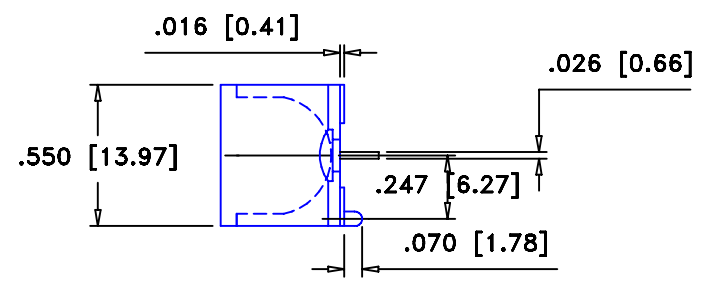



Date	SYM	REVISION RECORD	AUTH	DR.	CK.

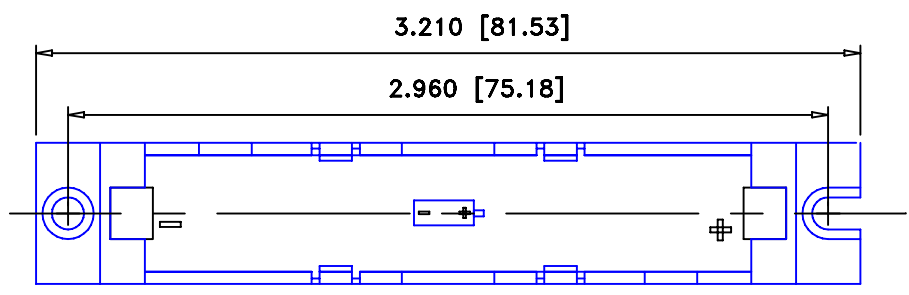

PCB LAYOUT

SPECIFICATION

HOLDER: SELF-EXTINGUISHING THERMOPLASTIC POLYESTER PBT, BLACK.
CONTACTS: #302 SPRING TEMPER STAINLESS STEEL, NICKEL PLATED .
FLAMMABILITY RATING, 94V-0, FILE NO. E88499(M)
DIELECTRIC STRENGTH: 560V/ MIL AT 25°C FOR 5 SEC.
TEMPERATURE RANGE: -55°C TO +180°C
RESISTANCE TO SOLVENTS: Xylene; Ethyl acetate; Butyl, Methyl & propyl alcohol;
Refrigerants; Heptane; Toluene.

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By T.S.
decimal ±.5 (.020)		2=1	Approved By T.B.
Fractional ± .8 (.030)	Title BH-2N LITHIUM BATTERY HOLDER		
Angular ± 3°	Date 2/17/01	Drawing Number BH-2N	