



Model No.: **GP192**

Type	: Alkaline High Drain Button Cell		
Chemical System	: Alkaline Manganese Dioxide		
Nominal Voltage	: 1.5Volts		
Nominal Dimensions	: $\varnothing 7.9\text{mm} \times 3.6\text{mm}$		
Application	: Watch (with alarm and lamp), calculator, electronic toys, melody card, ... etc.		
Average Weight	: 0.5g		
Date Code	: Unless otherwise specified, each cell Will carry a numeric year code and an alphabetical month code.		
Shelf Life	: Not less than 90% of the service capacity within first year. , not less than 85% of the service capacity with third year storage at $20 \pm 2^\circ\text{C}$ 45-75%RH		
Close Circuit Voltage	: 1.30 Volts (min.)(load resistor 100Ω at $20 \pm 2^\circ\text{C}$ for 0.1 to 2 seconds)		
Nominal Service Life(to 1.0V at $20 \pm 2^\circ\text{C}$)	: 900hrs (at $50\text{ k}\Omega$ load) 150 days (at $200\text{ k}\Omega$ load)		
Average Service Capacity (to 1.0V at $20 \pm 2^\circ\text{C}$)	: 24mAh(at $30\text{ k}\Omega$ load)		
Cross References:			
IEC	JIS	Eveready	Varta
LR41	LR41	192	V3GA

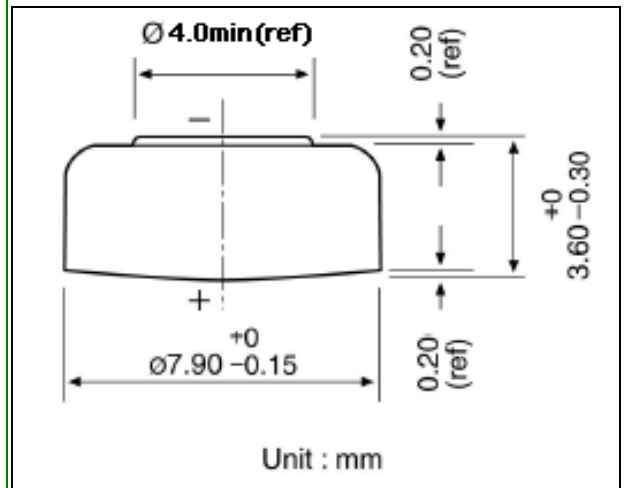

Typical Discharge characteristics at $20 \pm 2^\circ\text{C}$

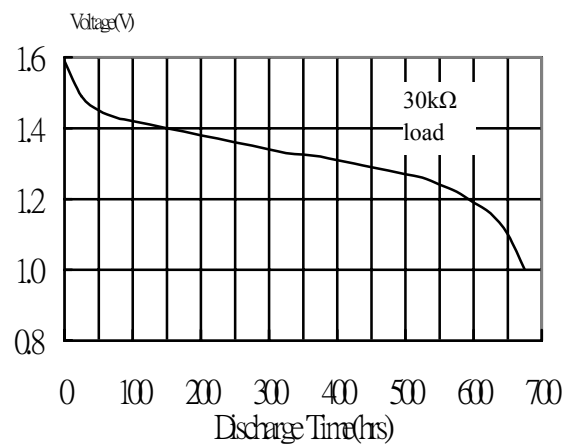

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.