

## Data Sheet

**Type Number** ..... 6131  
**Designation IEC** ..... CR 11108  
**System** ..... Li-Manganese dioxide / Organic Electrolyte

**UL Recognition:**..... MH 13654 (N)  
**Nominal Voltage** ..... 3 V  
**Typical Capacity C** ..... 170 mAh  
 Load 5.6 kOhm, at 20°C down to 2.0 V


**Weight (approx.)** ..... 3 g  
**Volume** ..... 1,1 ccm  
**Coding**..... TBA

**Temperature Ranges** min max.  
 Storage ..... -55°C 70°C  
 Discharge ..... -20°C 65°C

**Dimensions** min max.  
 Diameter (A) ..... 11,4 11,6  
 Height (B) ..... 10,4 10,8  
 Shoulder Diameter[E]..... 7,8  
 Shoulder Height [C]..... 0,4

**Segment** ..... Electronic

**Main Applications** ..... Photo  
 Electronic

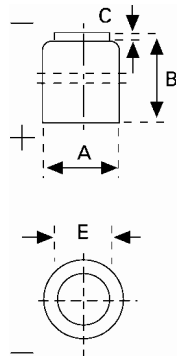

### Typical Capacities (at 20°C)

Discharge Type	Load	End Voltage:	2.0 V
Continuous 24h/d,7d/w Current [µA]:	5600 Ω	Time:	335 h
		Capacity [mAh]:	170
		Energy [mWh]:	475

All Data contained herein is for single cells

For battery applications, performance data may vary from single cell data, depending on specific battery configuration

VARTA Microbattery GmbH, Daimlerstr. 1, D-73479 Ellwangen/Jagst  
 Tel.: (+49) 7961/921-0, Telefax: (+49) 7961/921-553

Subject to change without prior notice!  
 Date of issue:2004-12-16