

TV VERTICAL OUTPUT CIRCUIT

The KA2131 is a monolithic integrated circuit designed for the vertical output stage in color television receivers.


FUNCTIONS

- Driver stage.
- Output stage.
- Flyback generators.
- Pulse shapers.

FEATURES

- Low power consumption, direct deflection coil driving capability (Flyback voltage is two times as high as the supply voltage is supplied during flyback period only).
- High breakdown voltage: 60V.

9 SIP H/S

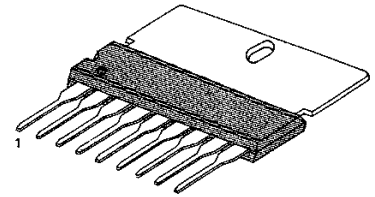

ORDERING INFORMATION

| Device | Package | Operating Temperature |
|--------|-----------|-----------------------|
| KA2131 | 9 SIP H/S | -20 ~ +70°C |

BLOCK DIAGRAM

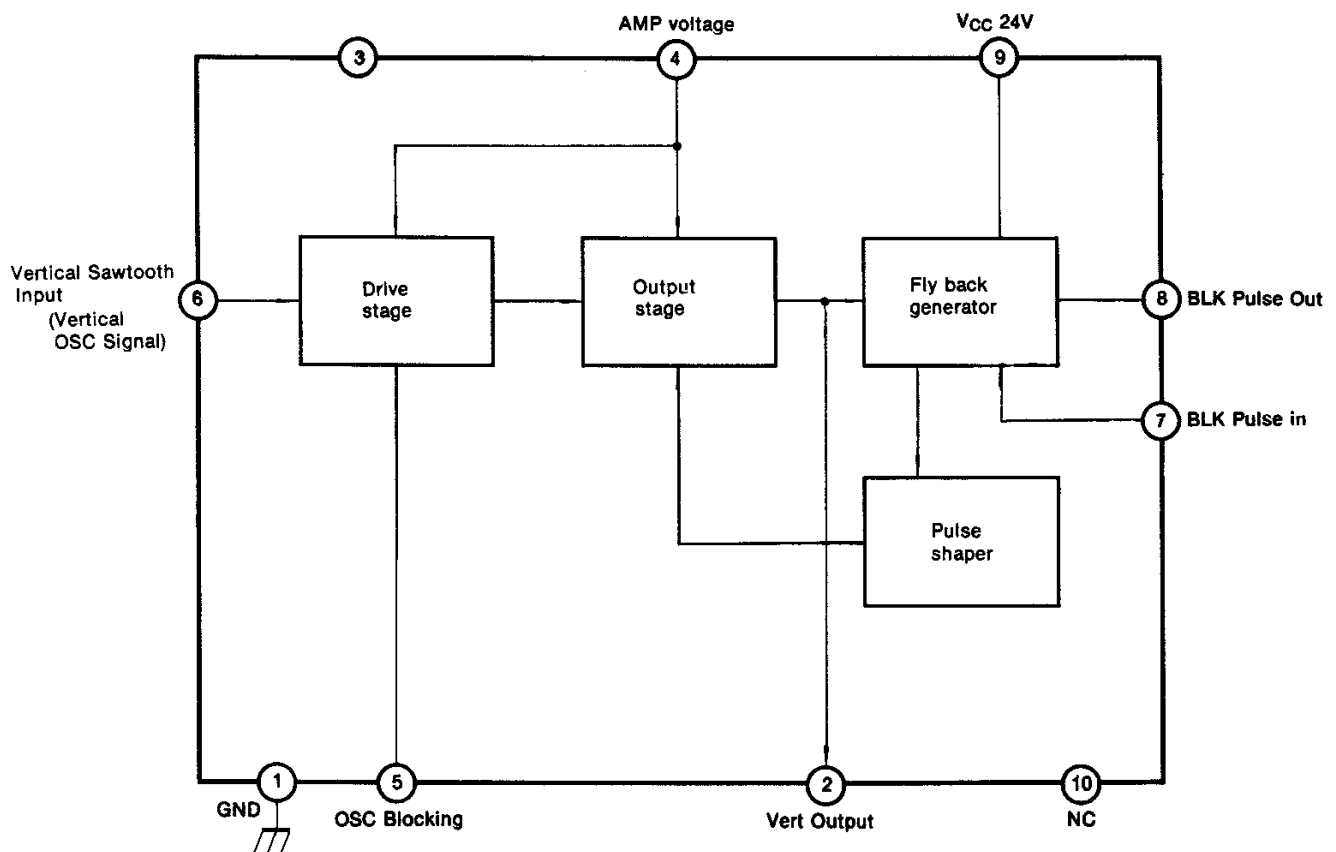



Fig. 1

ABSOLUTE MAXIMUM RATINGS

| Characteristic | Symbol | Value | Unit |
|-----------------------|-----------|-----------------|-------------------|
| Supply Voltage | V_{CC} | 27.6 | V |
| Circuit Voltage | V_4 | 60 | V |
| | V_6 | 2.5 | V |
| | V_7 | 1.3 | V |
| Supply Current | I_{CC} | 250 | mA |
| Power Dissipation | P_D | 6.66 | W |
| Circuit Current | I_2 | - 1000 ~ + 1000 | mA _{P-P} |
| | I_8 | - 1000 ~ + 1000 | mA _{P-P} |
| Operating Temperature | T_{OPR} | - 20 ~ + 70 | °C |
| Storage Temperature | T_{STG} | - 55 ~ + 150 | °C |

ELECTRICAL CHARACTERISTICS

| Characteristic | Symbol | Test Conditions | Min | Typ | Max | Unit |
|--|-----------------------|--|-------|------|------|-------------------|
| Deflection Current | I_{Y-P-P} | SW:2 | 860 | 930 | 1000 | mA _{P-P} |
| Deflection Current Linearity | $\Delta I_Y (+)$ | SW: 1 | 25 | — | 75 | mA _{P-P} |
| | $\Delta I_Y (-)$ | SW:1 | 22 | — | 85 | mA _{P-P} |
| Deflection Current vs. Operating Temperature | $\Delta I_Y/T_A$ | $T_a = -20 \sim +70^\circ\text{C}$ | - 1.5 | — | 1.5 | % |
| Center Voltage | V_{MID} | SW: 1 | 12.1 | 12.6 | 13.1 | V |
| Flyback Pulse Amplitude | $V(\text{FBP})$ | SW: 1 | 47 | | | V |
| Flyback Pulse Width | t_{FBP} | SW: 1 | 850 | 920 | 980 | μsec |
| Quiescent Circuit Current | I_{CO} | $V_4 = 24\text{V}$ $V_9 = 24\text{V}$ $V_7 = 0\text{V}$  | 7 | 13 | 22 | mA |
| Output TR Saturation Voltage | V_{4-2} | $V_4 = V_9 = 24\text{V}$, $\text{pin}_{2-1} = 56\Omega$ $V_6 = 0.3\text{V}$, $V_7 = 0\text{V}$ | — | 2.7 | 3.7 | V |
| | V_2 | $V_4 = V_9 = 24\text{V}$, $\text{pin}_{2-4} = 56\Omega$ $V_6 = 1.3\text{V}$, $V_7 = 0\text{V}$ | — | 0.6 | 1.0 | V |
| Saturation Voltage | V_8 | $V_9 = 24\text{V}$, $R_{\text{pin}_{9,8}} = 1.2\text{K}\Omega$ $V_7 = 0\text{V}$ | — | — | 0.5 | V |
| Thermal Resistance | $R_{\text{TH (J-C)}}$ | | — | — | 12 | °C/W |

TYPICAL APPLICATION CIRCUIT

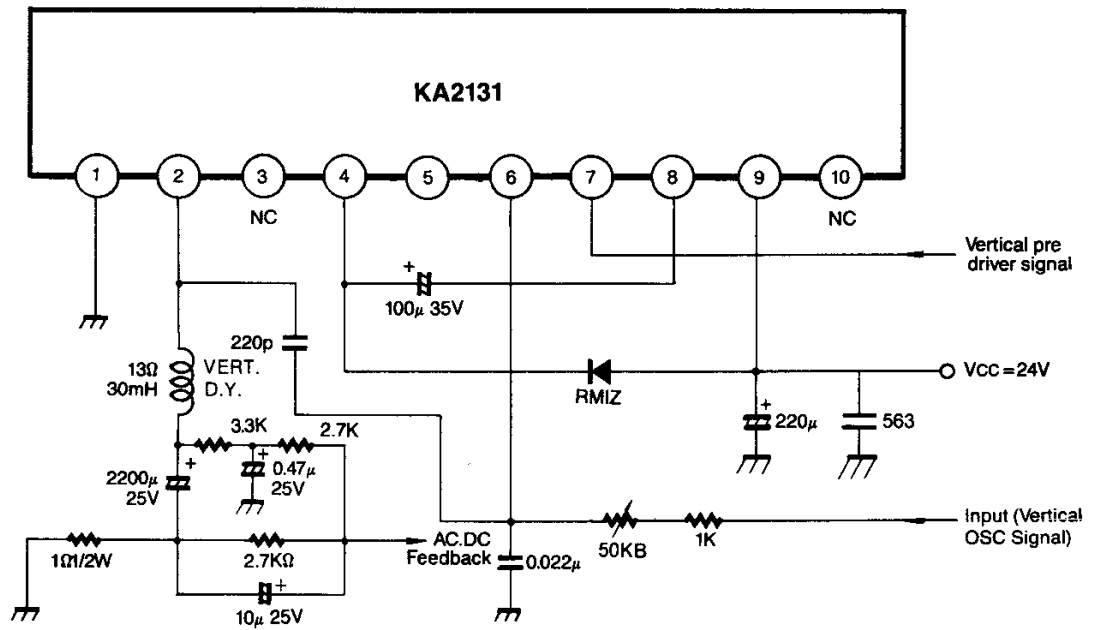


Fig. 2

TEST CIRCUIT

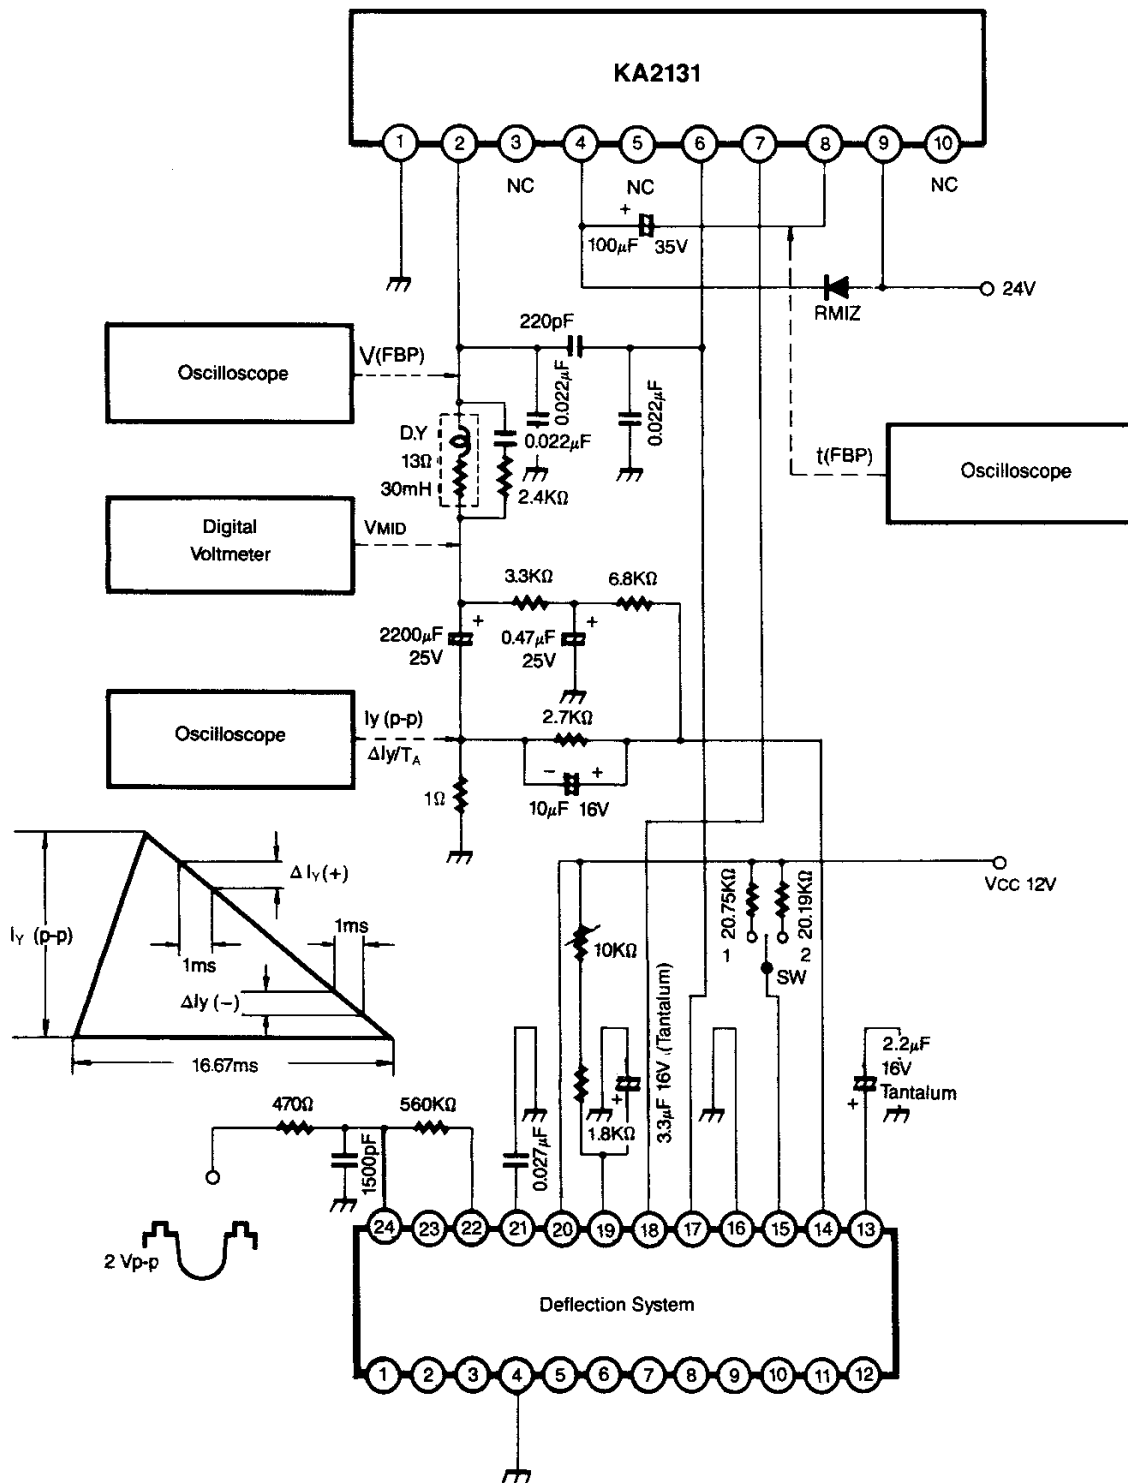


Fig. 3

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.