

承 认 书

SPECIFICATION FOR APPROVAL

Customer Name :

Customer Part No :

Product Name : CRYSTAL RESONATOR 49S

Part Description : 49S 6.7456MHZ 20PF +-20ppm pb-free

Date : 2022-05-25

CUSTOMER APPROVED BY

REDACTOR :

Peter Wu

APPROVER :

Andrew Liu

TKK Crystal Industrial (Hong Kong) Co., Limited

Room 1311, Block B, Senyagu, Line 3 City Apartments, Heao,Henggang, Longgang District, Shenzhen City,
China. post: 518115

SPECIFICATION FOR SMD QUARTZ CRYSTAL UNIT.**Part Number: 49S-6.7456M-20-1-20****1. SCOPE.**

This specification shall cover the characteristics of the Quartz Crystal with XXX MHz

ELECTRICAL CHARACTERISTICS

Item		Requirement	Note
Holder Type		HC- 49S	
Nominal frequency	Fo	6.7456MHz	
Operation Mode	Mn	Fundamental, AT-Cut	
Operating temperature	To	-20~+70℃	
Store temperature	Ts	-40 ~ +85 ℃	
Shunt capacitance	Co	7.0pF Max	
Freq. Tolerance	$\Delta f/f$	± 20 ppm	25℃
Freq. Vs temp.		± 20 ppm	-20~+75 ℃
Load capacitance	CL	20PF	
Motional resistance	Ω	80 Ω Max	
Drive level	DL	500 μ W max	
Insulation resistance	SR	500M Ω Min	(DC100 \pm 10V)
Aging	Δf_A	± 3 ppm/year	

■ MEASUREMENT

item	REQUIREMENT
Test instrument	It shall be measured by S&A 150D
Measurement	Standard condition: (1) Temperature $25 \pm 3^{\circ}\text{C}$ (2) Relative humidity $60 \pm 10\%$ R.H
Condition	The measurement shall be in the temperature range of 5°C to 35°C and relative humidity range of 45% to 85% when there are no faults


This standard is defined in accordance with IEC1178-1: 1993.OC6800000 and GB/T12273-1996.

■ PHYSICAL CHARACTERISTICS

Test Item	Condition of test	Performance Requirements
Shock (Destructive)	Resonator shall be tested after 3 times random drops from the height of 20-70 cm onto hard wooden board of thickness more than 30 mm.	No visible damage, and measured Values shall meet Table 1.
Vibration (Destructive)	Subject resonator to following vibration Frequency: 10-55Hz Amplitude: 0.75mm Cycle time: 1~2min(10-55-10Hz) Duration: 3 mutually perpendicular Planes in each 2 hours Direction: X, Y, Z	No visible damage, and measured values shall meet Table 1.
Terminal Strength (Destructive)	Pulling: body of resonator shall be fixed, and 1kg of tension weight shall be supplied gradually to axial direction of lead terminals for 30 seconds Bending: body of resonator shall be fixed, And 90° bending at a distance of 2.5 ± 0.5 mm from crystal main body shall be given being supplied 450g tension weight. after that, lead terminals shall be straightened gradually. Then, the same bending and straightening shall be supplied to the opposite direction in the same axial.	,Frequency value shall meet Table1 and $C.I < 2\Omega$, The lead shall not be broken.
Solder Heating (Destructive)	Each lead terminals shall be dipped into the solder melted tank at $350 \pm 10^{\circ}\text{C}$ for 3 ± 1 seconds to 2mm from the root of the resonator ,and at $260 \pm 10^{\circ}\text{C}$ for 10 ± 1 seconds by the same way.	No visible damage, and measured Values shall meet Table 1.
Solder DIP. (Destructive)	Dip the lead in liquid solder for 5 seconds, At $230 \pm 5^{\circ}\text{C}$ and 2.0mm from the root , after this dipping , 90% min of dipped parts shall be covered with solder.	No visible damage, and measured Values shall meet Table 1.

Leakage (non-destructive)	The resonator is to be soaked in the alcohol and enforced with the pressure of 25N/cm ² for 5 minutes. Next, the resonator shall be tested after being taken out and dried with a dryer.	The Ir between the wire and the shell must be more than 500M Ω .
-------------------------------------	---	---

■ ENVIRONMENT ENDURANCE:

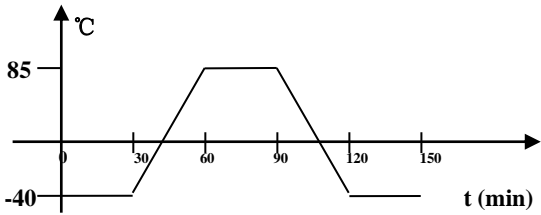Test Item	Condition of test	Performance Requirements
Heat Resistance (non-destructive)	Subject resonator to 85 \pm 5 $^{\circ}$ C for 16 hours, then place the resonator in natural condition for 1 hour.	No visible damage, measured Values shall meet Table 1.
Cold Resistance (non-destructive)	Subject resonator to -40 \pm 5 $^{\circ}$ C for 2 hours, then, place the resonator in natural condition for 1 hour.	No visible damage, measured Values shall meet Table 1.
Humidity	Keep the resonator at 40 \pm 2 $^{\circ}$ C and 90-95% R.H. for 96 hours. Then place it in natural condition for 1 hour.	The freq. meet $ \Delta f \leq 5$ ppm and C.I. $\leq 5\Omega$
Temperature shock	Temperature shaft from low to high, high to low For 3 times. And then put the resonator in natural Condition for 1 hour. 	No visible damage, measured Values shall meet Table 1..

■ CHANGE OF CHARACTERISTICS

Table 1


Test Item	Specification	Note
Frequency change ($ \Delta f/f_0 $)	No more than 10ppm	
C.I. (R)	No more than 15%	Reference to the initial value

■ REVIEW OF SPECIFICATIONS

When something gets doubtful with these specifications, we shall jointly work to get an agreement.

■ DIMENSIONS: (UNIT: mm)

FIG.1

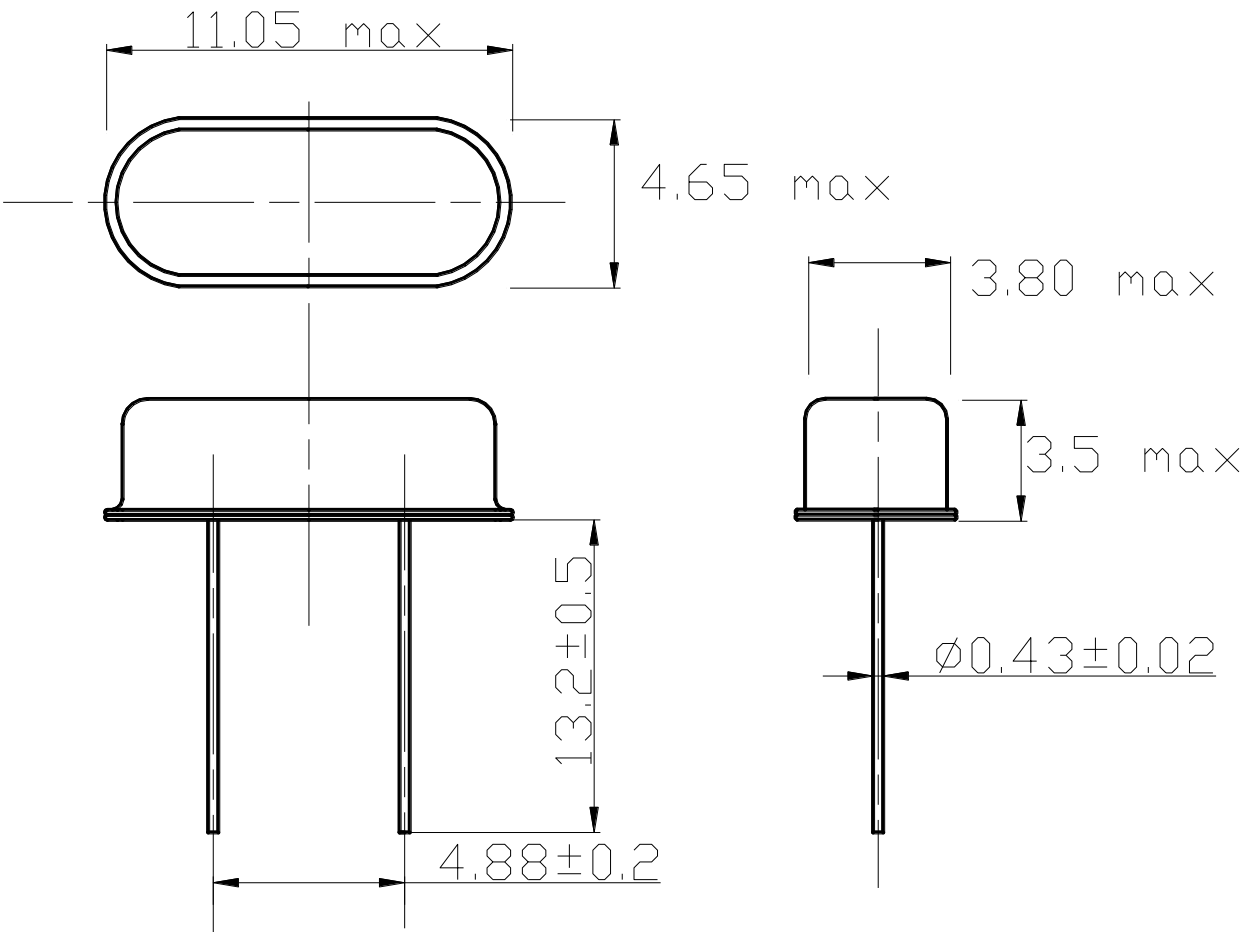

HC-49U/S

HC-49U/S
Height: 3.5mm Max