


FUSE AND FUSE HOLDER

Φ 4*15GlassTubeFuseSeries

KLS5-1001 Φ 4*15mm, Glass Tube Fuse, Quick-acting, Without Lead

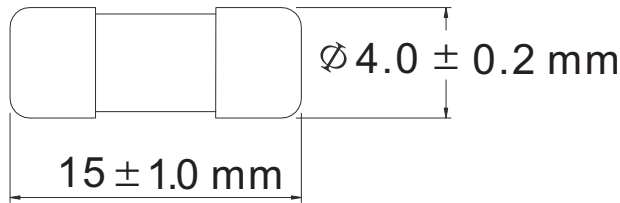


ELECTRICAL CHARACTERISTICS

Rated current		2.1 In	2.75 In	
		Maximum	Maximum	Minimum
Fusing time	≥ 32-100mA	30 min	10 ms	500 ms
	>100-6.3A	30 min	50 ms	2 s

Part No.	Rated Current	Rated Voltage
1001-0100	100mA	125V/250V
1001-0125	125mA	125V/250V
1001-0150	150mA	125V/250V
1001-0160	160mA	125V/250V
1001-0200	200mA	125V/250V
1001-0250	250mA	125V/250V
1001-0300	300mA	125V/250V
1001-0315	315mA	125V/250V
1001-0350	350mA	125V/250V
1001-0400	400mA	125V/250V
1001-0500	500mA	125V/25
1001-0600	600mA	125V/250V
1001-0700	700mA	12
1001-0750	750mA	125V/2
1001-0800	800mA	125V/250V
1001-1000	1A	125V/250V
1001-1200	1.2A	125V/250V
1001-1250	1.25A	125V/250V
1001-1500	1.5A	125V/250V
1001-1600	1.6A	125V/250V
1001-1800	1.8A	125V/250V
1001-2000	2A	125V/250V
1001-2500	2.5A	125V/250V
1001-3000	3A	125V/250V
1001-3150	3.15A	125V/250V
1001-3500	3.5A	125V/250V
1001-4000	4A	125V/250V
1001-5000	5A	125V/250V
1001-6000	6A	125V/250V
1001-6300	6.3A	125V/250V
1001-7000	7A	125V/250V
1001-8000	8A	125V/250V
1001-10000	10A	125V/250V
1001-12000	12A	125V/250V
1001-15000	15A	125V/250V
1001-20000	20A	125V/250V
1001-25000	25A	125V/250V
1001-30000	30A	125V/250V

I-T CHARACTERISTICS CURVE
电流-时间曲线图

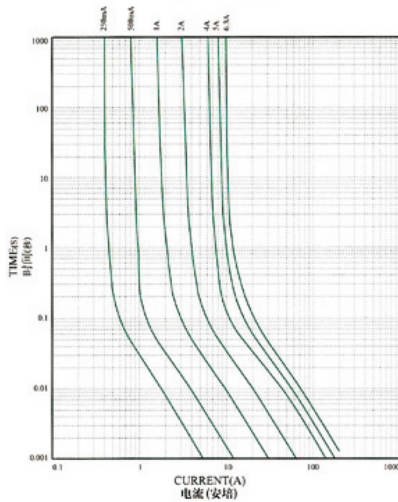

ORDER INFORMATION

Product NO.: KLS5-1001-XXXX

