

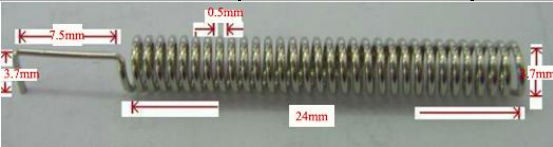




Antenna P/N:	CY001A		CY003A	
Frequency:	433Mhz		315/433MHz	
Frequency Bandwidth:	20MHz		20MHz	
Input Impedence:	50Ω		50Ω	
Voltage standing wave ratio:	≤1.8		≤1.8	
Gain:	0 dBi		0 dBi	
Power Capacity:	50W		50W	
Polarization Type:	Vertical		Vertical	
Lightning Protection:	DC GROUND		DC GROUND	
Working Humidity	55%-75%		55%~75%	
Working Temperature Range:	-40~85℃		-40~85℃	
Demension				

Antenna P/N:	CY002A	
Frequency:	315Mhz	
Frequency Bandwidth:	20MHz	
Input Impedence:	50Ω	
Voltage standing wave ratio:	≤1.8	
Gain:	0 dBi	
Power Capacity:	50W	
Polarization Type:	Vertical	
Lightning Protection:	DC GROUND	
Working Humidity	55%~75%	
Working Temperature Range:	-40~85℃	
Demension	