

### 1. Features

- Typical 1dB bandwidth of 1.45 MHz
- Low-Loss Filter
- Single Ended Operation
- Surface Mounted Package (SMD)

**RoHS Compliant**

Tested by SGS Testing Korea


### 2. Electrical Specifications

Source and Load Impedance = 50Ω


Operating Temperature : -35°C ~ +75°C		Minimum	Typical	Maximum
Center Frequency (fo)	MHz	-	60.0	-
Insertion Loss	dB	-	12.6	15.0
1dB Bandwidth	MHz	1.0	1.45	-
3dB Bandwidth	MHz	-	1.9	-
40dB Bandwidth	MHz	-	3.65	4.1
Amplitude Ripple (fo ± 0.42 MHz)	dB	-	0.5	1.0
Group Delay Variation (fo ± 0.42 MHz)	nsec	-	85	120
Absolute Delay	usec	-	1.59	-
Ultimate Rejection	dB	40	47	-
Temperature Coefficient of Frequency	ppm/°C	-	-18	-

Room Temperature : +25°C		Minimum	Typical	Maximum
Insertion Loss	dB	-	12.6	14.5
Amplitude Ripple (fo ± 0.5 MHz)	dB	-	0.5	1.0
Group Delay Variation (fo ± 0.5 MHz)	nsec	-	85	120

#### S1365 Package Dimension

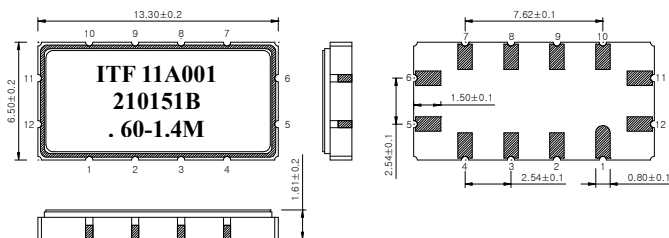

#### Matching Schematic

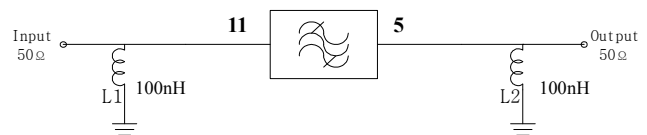

Dimensions shown are nominal in millimeters

Body : Al<sub>2</sub>O<sub>3</sub>  
 Lid : Kovar, Ni Plated  
 Termination : Au plating 0.3 ~ 1.0um, over a 1.27 ~ 8.89um Ni Plating

Pin Configuration			
Input	11	Ground	6, 12
Output	5	Others	Ground

### 3. Typical Performance ( at +25°C )

