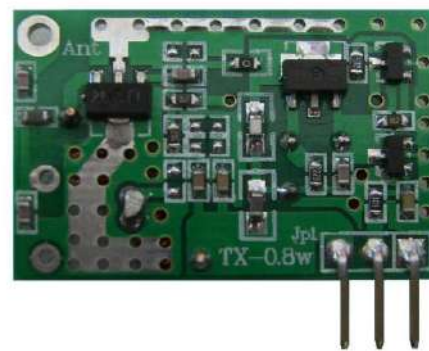
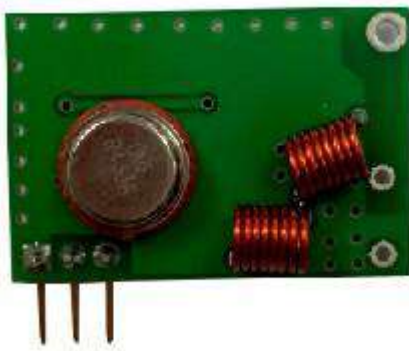


Type: 2000M Range ASK/OOK Transmitting Module**Model: CYTD1****1. DESCRIPTION:**

CYTD1 ASK wireless transmitting module is using the surface acoustic resonator and high power RF circuit. This circuit will have current consumption only if you press the button which means there is no electricity consumption at ordinary times. It is simple to use. CYTD1 can cooperate with the commonly used ASK super-regenerative receiver circuit or super heterodyne receiver circuit. CYTD1 is with high frequency stability. The data port can direct access to the data signals of the single chip microcomputer or wireless encoding chip and it can easily achieve the function from data to the wireless signal emission.

**2. FEATURES**


- High output power, when using with CY11, it can reach 2000 meters in open area.
- Transmitting Power > 0.5W.
- Operating Voltage : DC5-9V
- Operating Current : About 120mA
- Operating Frequency : 315MHz/433MHz (custom frequency is available)
- Modulation : ASK/OOK
- Using SAW frequency stabilization (+-75Khz), working frequency is stable.
- There is no current consumption when there is no data transmitting. The current consumption with low emission is 120mA.

- Shape Size : 30×20×6.5mm
- Operating Temperature : -20°C ~ +70°C
- Input Signal: TTL level

3. APPLICATION:

- RKE – remote keyless entry
- Gate/Access Control
- Wireless alarm
- Remote Shutter/Curtain
- Home automation system
- Security and alarm systems.
- Wireless Industry Control

4. PIN DEFINITION:

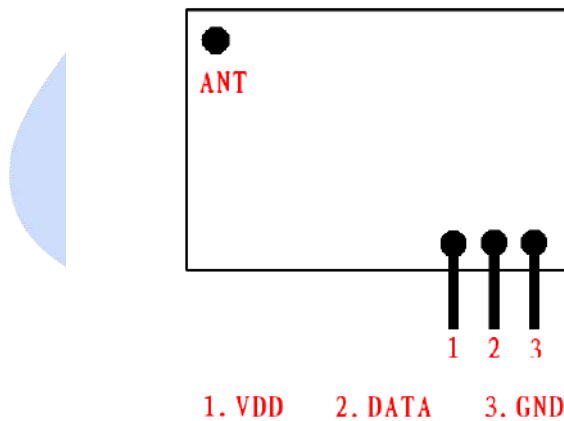

Pin-out as showed in Figure1 above.

Pin Name	Pin Definition
VDD	Connect to positive power supply
DATA	Data connected to MCU
GND	Connect to negative power supply

5.ELECTRICAL CHARACTERISTICS:

Condition: Ta=25°C Vcc=5.0V

Characteristics	Symbol	Condition	Value			Unit
			Min	Typ	Max	
Frequency	Fc		315		433.92	MHz
Modulation Mode			ASK			
Output power		5V/50Ω		28		dBm
Data-rate				2.4		KHz
Frequency Tolerate	Fc			±75		KHz
Current	IRC				120	mA
Working Voltage	VCC			5		V
Working Temperature	TC		-20		+70	°C

6. MECHANICAL SIZE: (unit: mm)

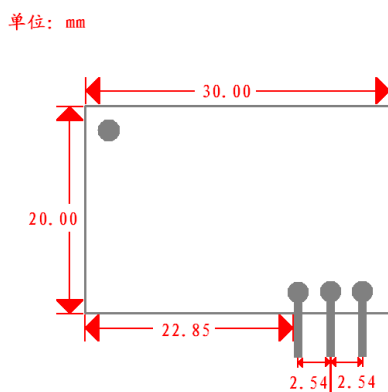


Figure2 CYTD1 Dimension

For more information and assistance, please contact us as follows:

CY WIRELESS TECHNOLOGY LIMITED

Add: 1407, Block C, Tairan Building, 8th Tairan Road, Futian District,



Shenzhen, Guangdong Province, China

Website: www.rficy.com

Email: info@rficy.com

