


Ningbo Best Group Co.,Ltd.

TYPE: FBS-103 20W 8OHM (8OHM/ 20W)

目 录	内 容 DESCRIPTION	规 格 SPECIFICATION	测 试 条 件 TEST CONDITION
1	外 径 尺 寸 DIMENSION	102 mm	
2	额 定 阻 抗 RATED IMPEDANG	8±15% ohm	At 1000Hz, 20°C
3	额 定 噪 声 功 率 RATED POWER	18w	Pink noise 800HZ—12000HZ
4	最 大 功 率 MAX.POWER INPUT	20w	
5	谐 振 频 率 RESONANT FREQ	80±20% Hz	WIHOUT BAFFLE
6	特 性 灵 敏 度 级 S . P . L	85±3 Db	1M/1W
7	纯 音 监 听 BUZZ & RATTLE	12V	Sine wave, 0.3M
8	频 响 范 围 EFFECTIVE FREQ. RANGE	Fo~12000 Hz	
9	磁 铁 MAGNET	Φ60×24x10 mm	
10	总 高 度 TOTAL HEIGHT	47 mm±0.5MM	
11	包 装 PACKAGE	CM	60PCS
12	总谐波失真系数 RATED TOTAL HARMONIC	≤5%MAX	GB/T9396
13	极 性 POLARITY	IF THE CONE PAPER OF SPEAKER IS OBVERSE , TERMINAL IS IN THE LOWER POSITIVE IN THE RIGHT SIDE。	GB/T9396-1996
14	绝缘电阻 INSULATION RESISTANCE	≥1MΩ	GB/T9397 100 ± 10%V DC FOR 1 MINUTE, BETWEEN THE TERMINAL AND THE EXPOSED METALLIC PART
15	高温贮存试验 HIGH-TEMPERATURE PRESERVATION TEST	AFTER TEST ACCORD SEVENTH	GB/T9369 PINK NOISE 1w , 24H
16	低温贮存试验 LOW-TEMPERATURE PRESERVATION TEST	AFTER TEST ACCORD SEVENTH	GB/T9397-10 ± 3OC OPERATIONFOR 1H THEN DEPOSITION -15±3OC FOR 2H, THEN RESUMING FOR 4H AT NORMAL ATMOSPHERE CONDITIONS
17	稳态湿热试验 STATIC HUMIDITY/TEMPERATURE TEST	AFTER TEST ACCORD SEVENTH	GB/T9397 AT35 ± OC AND 93%R.H DEPOSITING FOR 24H,THEN RESUMING FOR 16H AT NOMAL ATMOSPHERE CONDITIONS
18	滑落冲击试验 SLIDING SHOCK TEST	AFTER TEST ACCORD SEVENTH	GB/T9397 THE LOAD SPEAKER SHALL BE DROPPED 1 TIMES FROM IN LEHTH OF 1M IN A ANGLE OF 55 INCLINATION

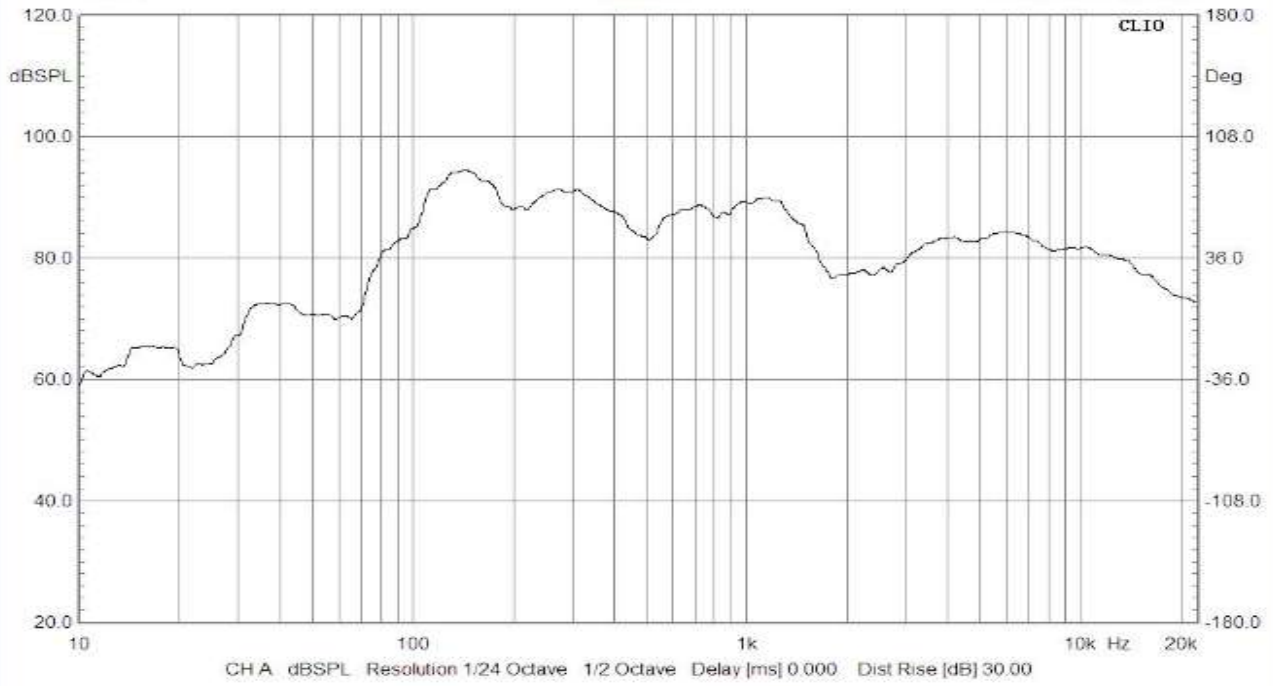

LDSL3.843.

