

1

2

3

4

SPECIFICATION

受 控


1. SCOPE

This specification is applied to the piezo-element.

2. SPECIFICATION

(at25°C)

- | | | |
|--|---|-----------------------|
| 2.1 Resonant Frequency | : | 4.0±0.5 KHz |
| 2.2 Resonant Resistace | : | 300 Ω max |
| 2.3 Capacitance | : | 34000 pF±30% at 100Hz |
| 2.4 Input Voltage | : | 30 Vp-p max |
| 2.5 Operating Temperature | : | -20~+70°C |
| 2.6 Storage Temperature | : | -30~+80°C |
| 2.7 Insulation Resistance (at 25VD.C.) | : | 50M Ω min. |
| 2.8 Highest Operating Temperature | : | 160°C (for 0.5 hours) |
| 3. DIMENSION | : | as per figure |

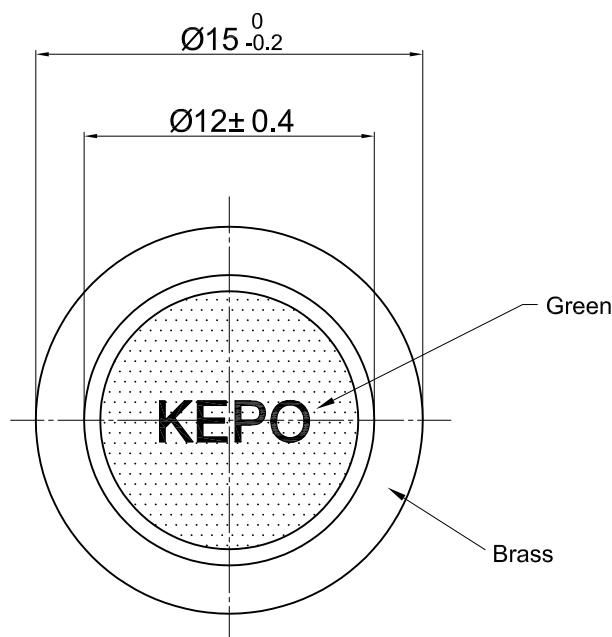


TOLERANCES UNLESS NOTED OTHERWISE

.X ±
.XX ±
.XXX ±

90° FORMED +2°
ANGLES -1°

FIRST ANGLE PROJECTION



DRAWN

汪逸

DESIGN

CHECKED

APPROVED

徐锦生

DATE

12.09.19

CONTRACT NO.

AGENCY APPROVAL

KEPO MODEL NO.

FT-15T-4.0A1

DWG NO.

KP3.846.823.01

Ningbo Kepo Electronics Co.,Ltd.

CUSTOMER:

CUSTOMER NO.

VER

1.0

SCALE

UNIT

mm

SHEET

TEL:(+86)574-88370330

FAX:(+86)574-88370329

1

2

3

4