

受 控
-----

# SPECIFICATION


## 1. SCOPE

This specification is applied to the piezo-element.

## 2. SPECIFICATION

(at 25°C)

2.1 Resonant Frequency	:	3.8~4.6 KHz
2.2 Resonant Resistace	:	350 Ω max
2.3 Capacitance	:	14000~28000 pF at 100Hz
2.4 Input Voltage	:	30 Vp-p max
2.5 Operating Temperature	:	-20~+60°C
2.6 Storage Temperature	:	-20~+70°C
3. DIMENSION	:	as per figure

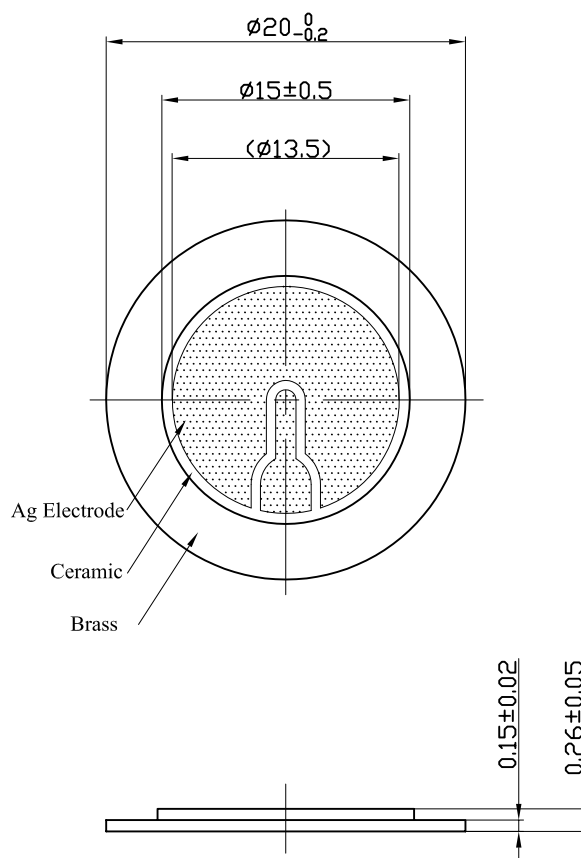


TOLERANCES UNLESS NOTED OTHERWISE

.X ±  
.XX ±  
.XXX ±

90° FORMED +2°  
ANGLES -1°

FIRST ANGLE PROJECTION



DRAWN	汪逸	KEPO MODEL NO.	CUSTOMER		
DESIGN		FT-20T-4.0B1	CUSTOMER NO.		
CHECKED		DWG NO.	VER	1.1	SCALE
APPROVED	徐锦生	KC3.001.163	UNIT	mm	SHEET
DATE	09.12.24		Ningbo Kepo Electronics Co.,Ltd. TEL:(+86)574-88370330 FAX:(+86)574-88370329		
CONTRACT NO.					
AGENCY APPROVAL					