

1

2

3

4

SPECIFICATION

受 控

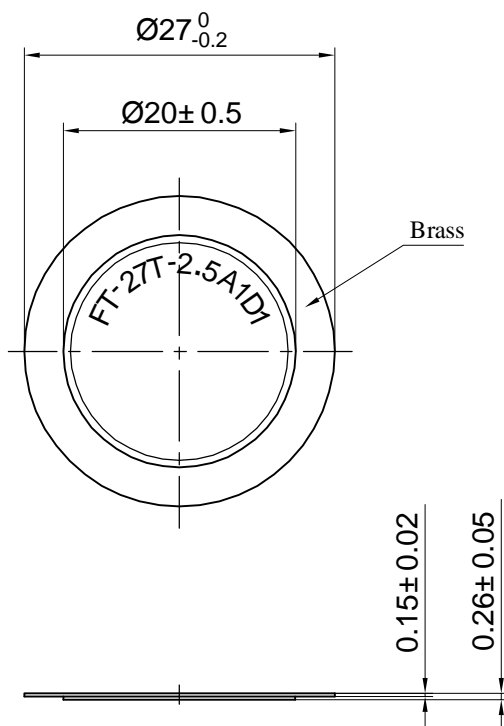
1. SCOPE

This specification is applied to the piezoelectric diaphragm.

2. SPECIFICATION

(at25°C)

2.1 Resonant Frequency	:	2.5±0.3 KHz
2.2 Resonant Resistance	:	500 Ω max
2.3 Capacitance	:	50000 pF±30% at 100Hz
2.4 Input Voltage	:	30 Vp-p max
2.5 Operating Temperature	:	-20~+50°C
2.6 Storage Temperature	:	-20~+60°C
3. Dimension	:	as per figure

TOLERANCES UNLESS
NOTED OTHERWISE.X ±
.XX ±
.XXX ±90° FORMED +2°
ANGLES -1°

FIRST ANGLE PROJECTION



DRAWN

WY

KEPO MODEL NO.

CUSTOMER

DESIGN

FT-27T-2.5A1D1

CUSTOMER NO.

CHECKED

DWG NO.

APPROVED

XJS

DATE

10.12.06

KP3.845.842

CONTRACT NO.

VER

1.3

SCALE

UNIT

mm

SHEET

AGENCY APPROVAL

KEPO CO.,LTD.

TEL:(+86)574-88370330

FAX:(+86)574-88370329

1

2

3

4