

# SPECIFICATION


## 1. SCOPE

This specification is applied to the piezo-element.

## 2. SPECIFICATION

(at25°C)

|                           |   |                        |
|---------------------------|---|------------------------|
| 2.1 Resonant Frequency    | : | 4.0± 0.5 KHz           |
| 2.2 Resonant Resistace    | : | 500 Ω max              |
| 2.3 Capacitance           | : | 55000 pF± 30% at 100Hz |
| 2.4 Input Voltage         | : | 30 Vp-p max            |
| 2.5 Operating Temperature | : | -20~+60°C              |
| 2.6 Storage Temperature   | : | -20~+70°C              |
| 3. DIMENSION              | : | as per figure          |

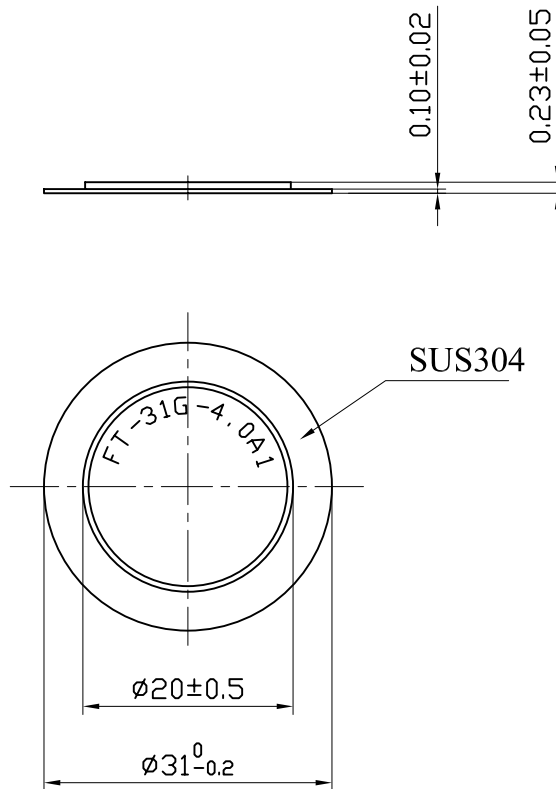


TOLERANCES UNLESS  
NOTED OTHERWISE

.X ±  
.XX ±  
.XXX ±

90° FORMED +2°  
ANGLES -1°

FIRST ANGLE PROJECTION



DRAWN

DESIGN

CHECKED

APPROVED

DATE

05.08.10

CONTRACT NO.

AGENCY APPROVAL

KEPO MODEL NO.

FT-31G-4.0A1-1719

DWG NO.

OEM1719

**KEPO CO.,LTD.**

CUSTOMER

QUARTZ-1

CUSTOMER NO.

VER

1.0

SCALE

UNIT

mm

SHEET

TEL:(+86)574-88370330

FAX:(+86)574-88370329