

受 控

SPECIFICATION


1. SCOPE

This specification is applied to the piezo-element.

2. SPECIFICATION

(at 25°C)

- | | | |
|---------------------------|---|----------------------|
| 2.1 Resonant Frequency | : | 6.5±0.5kHz |
| 2.2 Resonant Resistace | : | 500 Ω max |
| 2.3 Capacitance | : | 12000pf±30% at 100Hz |
| 2.4 Input Voltage | : | 30Vp-p max |
| 2.5 Operating Temperature | : | -20~+60°C |
| 2.6 Storage Temperature | : | -20~+70°C |
| 3. DIMENSION | : | as per figure |

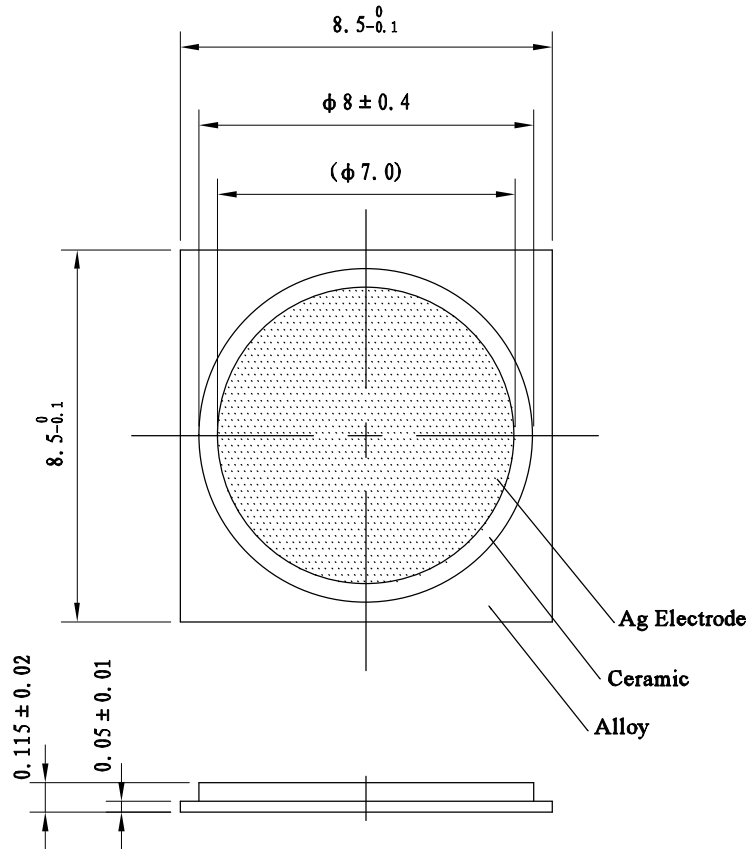

★注：此蜂鸣片需达到过回流焊的工艺要求，回流焊温度260°C (90s)

<p>TOLERANCES UNLESS NOTED OTHERWISE</p> <p>.X ±</p> <p>.XX ±</p> <p>.XXX ±</p> <p>90° FORMED +2°</p> <p>ANGLES -1°</p> <p>FIRST ANGLE PROJECTION</p>	DRAWN		KEPO MODEL NO.	CUSTOMER:				
	DESIGN		FT-8.5X8.5N-6.5A1	CUSTOMER NO.				
	CHECKED							
	APPROVED		DWG NO.	KC3.001.151	VER	1.2	SCALE	
	DATE	14.07.21			UNIT	mm	SHEET	
	CONTRACT NO.			KEPO CO.,LTD.	TEL:(+86)574-88370330 FAX:(+86)574-88370329			
AGENCY APPROVAL								