


● FEATURES


- LOW PROFILE
- HIGH ACCURACY AND STABILITY
- WIDE FREQUENCY RANGE FROM 10.00 MHz TO 200.00 MHz

● SPECIFICATIONS


PARAMETER	VALUE
FREQUENCY RANGE	10.00 MHz TO 200.00 MHz
FREQUENCY TOLERANCE AT 25°C	±10, ±30, ±50, ±100 PPM
FREQUENCY STABILITY OVER TEMPERATURE	±4, ±10, ±30, ±50, ±100 PPM
OPERATING TEMPERATURE RANGE	-10°C TO +60°C STANDARD -40°C TO +85°C EXTENDED
STORAGE TEMPERATURE RANGE	-40°C TO +85°C
AGING	±2 PPM PER YEAR
EQUIVALENT SERIES RESISTANCE	90 OHMS MAX
LOAD CAPACITANCE	10 pF TO 32 pF OR SERIES
SHUNT CAPACITANCE	7.0 pF MAXIMUM
DRIVE LEVEL	1.0 mA TYPICAL
REFLOW CONDITIONS	SEE REFLOW SOLDER PROFILE

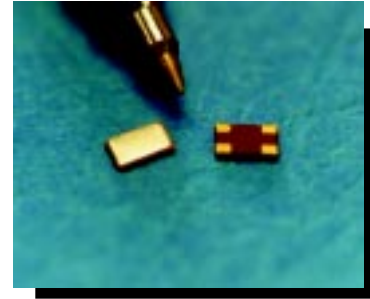


● OUTLINE DRAWING

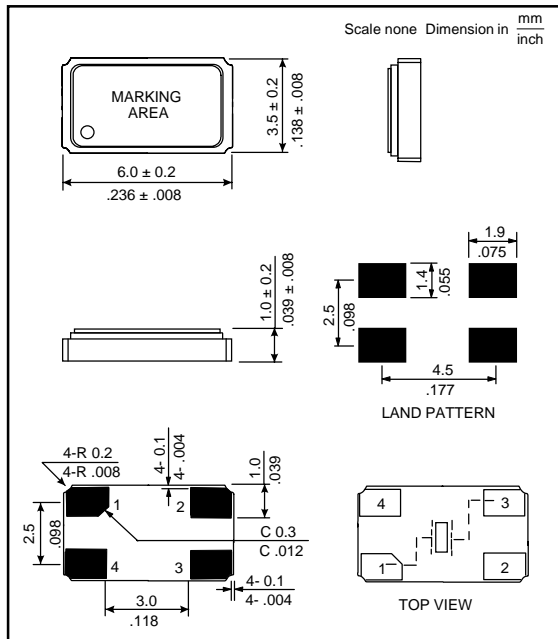

● SOLDER REFLOW PROFILE

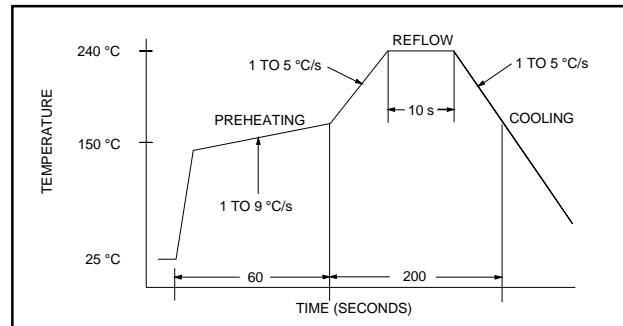

● CARRIER TAPE DIMENSIONS

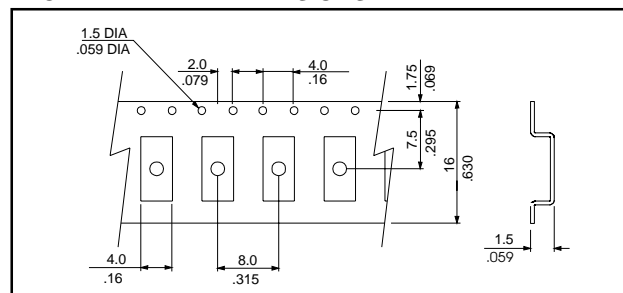

● PACKAGING

250 mm REEL DIAMETER
16 mm TAPE WIDTH, 8 mm PITCH
QUANTITY: 1000 PIECES PER REEL

● PART NUMBERING SYSTEM

HOLDER TYPE	FREQUENCY	LOAD CAPACITANCE	MODE			EXTENDED TEMPERATURE	TAPE AND REEL
			FUND 3OT 5OT	FUNDAMENTAL THIRD OVERTONE	FUNDAMENTAL FIFTH OVERTONE		
H10S	IN MHz	10 TO 32 pF FOR PARALLELS FOR SERIES				EXT	TR

EXAMPLE: H10S-45.00-32-FUND-T