

1

2

3

4

# SPECIFICATION

受 控


## 1. SCOPE

This specification is applied to the piezo-element.

## 2. SPECIFICATION

(at 25°C)

2.1 Resonant Frequency	:	4.2± 0.5KHz
2.2 Resonant Resistace	:	120 Ω max
2.3 Capacitance	:	130000pF± 30% at 100Hz
2.4 Input Voltage	:	30Vp-p max
2.5 Operating Temperature	:	-20~+60°C
2.6 Storage Temperature	:	-30~+70°C
3. DIMENSION	:	as per figure

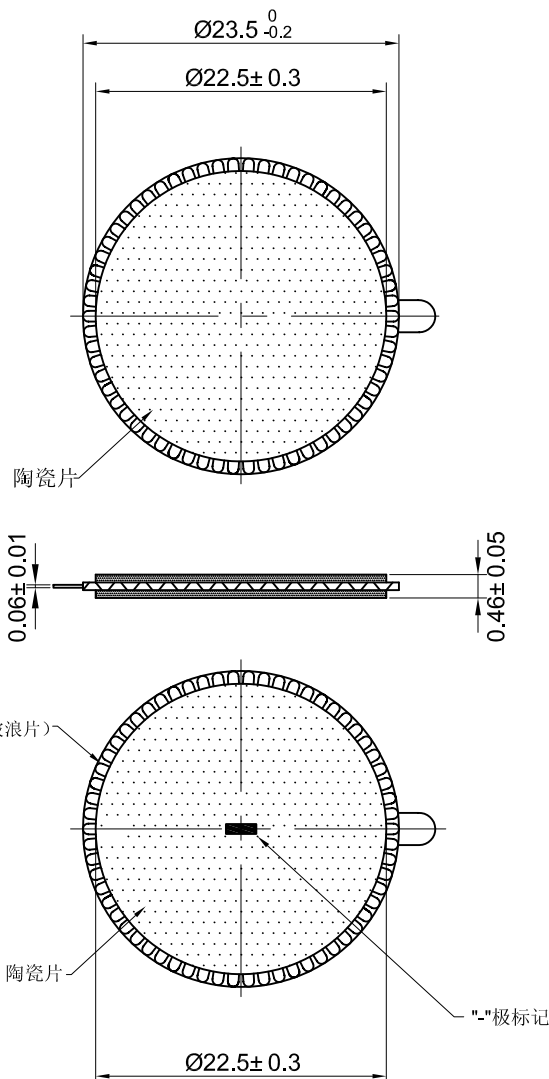

备注:


铜基片为H65波浪片, 材料厚度 $0.06 \pm 0.01$ mm, 成形后厚度 $0.13 \pm 0.02$ mm, 成形清晰、美观

TOLERANCES UNLESS NOTED OTHERWISE

.X ±  
.XX ±  
.XXX ±

90° FORMED +2°  
ANGLES -1°

FIRST ANGLE PROJECTION



DRAWN	汪逸
DESIGN	
CHECKED	
APPROVED	徐锦生
DATE	11.05.20
CONTRACT NO.	
AGENCY APPROVAL	

KEPO MODEL NO.

HFT-23.5T-4.2BS

DWG NO.

KP3.840.823.02

**KEPO CO., LTD.**

CUSTOMER

CUSTOMER NO.

VER	1.1	SCALE	
UNIT	mm	SHEET	

TEL:(+86)574-88370330  
FAX:(+86)574-88370329

1

2

3

4