

Specification for Two Mode Speaker		Page	2/10
Model No. : KP1710M1		Revision No.	1.1
		Drawing No.	kfc1785

CONTENTS

1. Scope
2. General
3. Electrical and Acoustic Characteristics.
4. Reliability Test
5. Measurement Block Diagram & Response curve
6. Structure
7. Dimensions
8. Packing
9. Revision

Specification for Two Mode Speaker		Page	3/10
Model No. : KP1710M1		Revision No.	1.1
		Drawing No.	kfc1785

1. Scope

This specification is applied to the two mode dynamic speaker which is used all of the electrical acoustic product.

-- compact, rich sound

-- applications: mobile phone, PDA, notebook computer, etc. ..

2. General

2.1 Out-Diameter : 1710 mm

2.2 Height : 3.7mm

2.3 Weight : 1.0 gr.

2.4 Operating Temperature range:

-20~+70℃ without loss of function

2.5 Store Temperature range:

-40~+85℃ without loss of function

3. Electrical and Acoustic Characteristics.

Test condition : 15 ~ 35 ℃ , 25% ~ 85% RH, 860~1060 mbar

3.1 Speaker

	Items	Specification
1	Impedance	$8\ \Omega \pm 15\%$ (at 1Vrms,1.5kHz)
2	Sound Pressure Level	86dB \pm 3dB(1kHz/0.1W/0.1M)
3	Resonance Frequency	1000 Hz \pm 20%
4	Frequency Range	F ₀ ~ 10.0kHz
5	Input Power	Rated 0.5W / Max. 0.8W
6	Distortion	<10% Max. at 2kHz/2Vrms
7	Buzz and Rattle	Should not be audible buzzes,rattles when the 2.0V sine wave signal swept at frequency range.
8	Polarity	When supplied plus D.C. voltage to (+) terminal, the cone diaphragm must move to forward.


3.2 Receiver

	Items	Specification
1	Impedance	$8\ \Omega \pm 15\%$ (at 1Vrms,1.5kHz)
2	Sound Pressure Level	118 dB \pm 3dB(1kHz/100mV)
3	Frequency Range	300~3400Hz
4	Input Power	Rated 10mW / Max. 30mW
5	Distortion	<3% Max. at 1kHz/1Vrms
6	Buzz and Rattle	Should not be audible buzzes,rattles when the 0.28V sine wave signal swept at frequency range.

Specification for Two Mode Speaker		Page	4/10
Model No. : KP1710M1		Revision No.	1.1
		Drawing No.	kfc1785

4. Reliability Test


After test(1~7item), the speaker S.P.L . difference shall be within $\pm 3\text{dB}$, and the appearance not exist any change to be harmful to normal operation(e.g. cracks,rusts,damages and especially distortion).

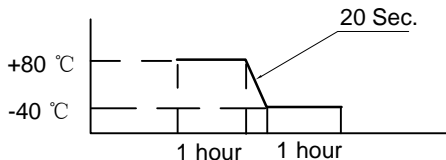	Item	Specification
1	High Temperature Test	After being placed in a chamber with $+85\pm 3\text{ }^{\circ}\text{C}$ for 96 hours and then being placed in natural condition for 1 hour, speaker shall be measured.
2	Low Temperature Test	After being placed in a chamber with $-40\pm 3\text{ }^{\circ}\text{C}$ for 96 hours and then being placed in natural condition for 1 hour, speaker shall be measured.
3	Humidity Test	After being placed in a chamber with 85 to 90%R.H. at $+40\pm 2\text{ }^{\circ}\text{C}$ for 96 hours and then being placed in natural condition for 1 hour, speaker shall be measured.
4	Thermal Shock Test	<p>After being placed in a chamber at $+80\text{ }^{\circ}\text{C}$ for 1 hour, then speaker shall be placed in a chamber at $-40\text{ }^{\circ}\text{C}$ for 1 hour(1 cycle is the below diagram).</p> <p>After 6 above cycles, speaker shall be measured after being placed in natural condition for 1 hour.</p> 
5	Vibration Test	After being applied vibration of amplitude of 1.5mm with 10 to 55Hz band of vibration frequency to each of 3 perpendicular directions for 1 hour, then placed in natural condition for 1 hour, speaker shall be measured.
6	Drop Test	The speaker when mounted in the jig which weight 85g~100g, shall with stand 15 times random drops from a height of 1.5 meter to a concrete floor faced with 5mm thick hard wood board.and be nothing mechanical damage.
7	Load test	The speaker after being applied loading white noise with input power 0.5W(2.0Vrms.) for 96 hours, then placed in natural condition for 1 hour, speaker shall be measured.
		The receiver after being applied loading white noise with input power 10mW(0.28Vrms.) for 96 hours, then placed in natural condition for 1 hour, speaker shall be measured.
8	Insulation test	When they are measured with DC 100V the insulation resistance between v.c. terminal and frame must be more than 1 MΩ


Specification for Two Mode Speaker		Page	5/10
Model No. : KP1710M1		Revision No.	1.1
		Drawing No.	kfc1785

5. Measurement Block Diagram & Response curve

5.1 Speaker



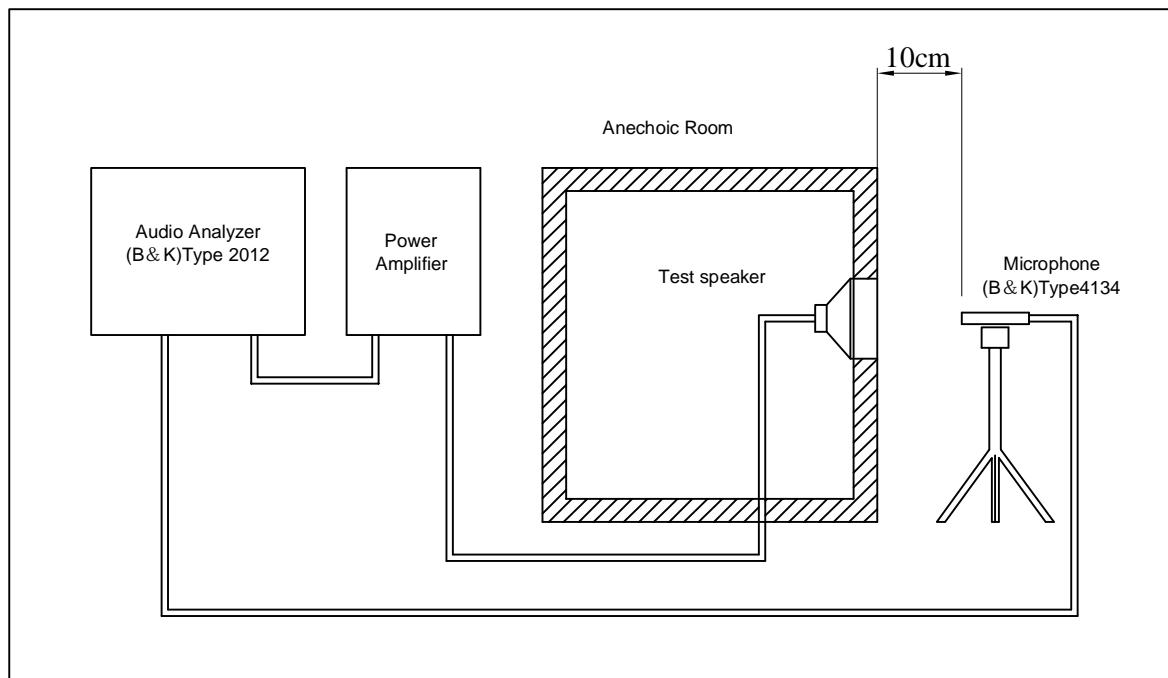


SPL vs Freq

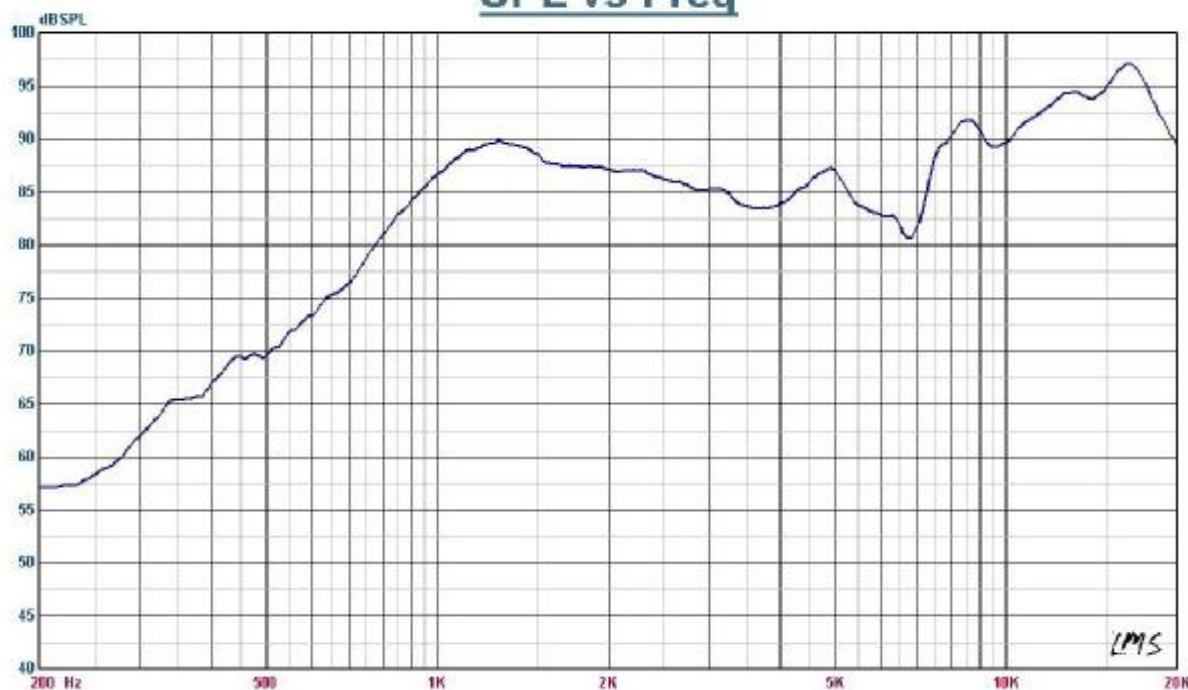


Specification for Two Mode Speaker		Page	6/10
		Revision No.	1.1
		Drawing No.	kfc1785
Model No. : KP1710M1			

5.2 Receiver

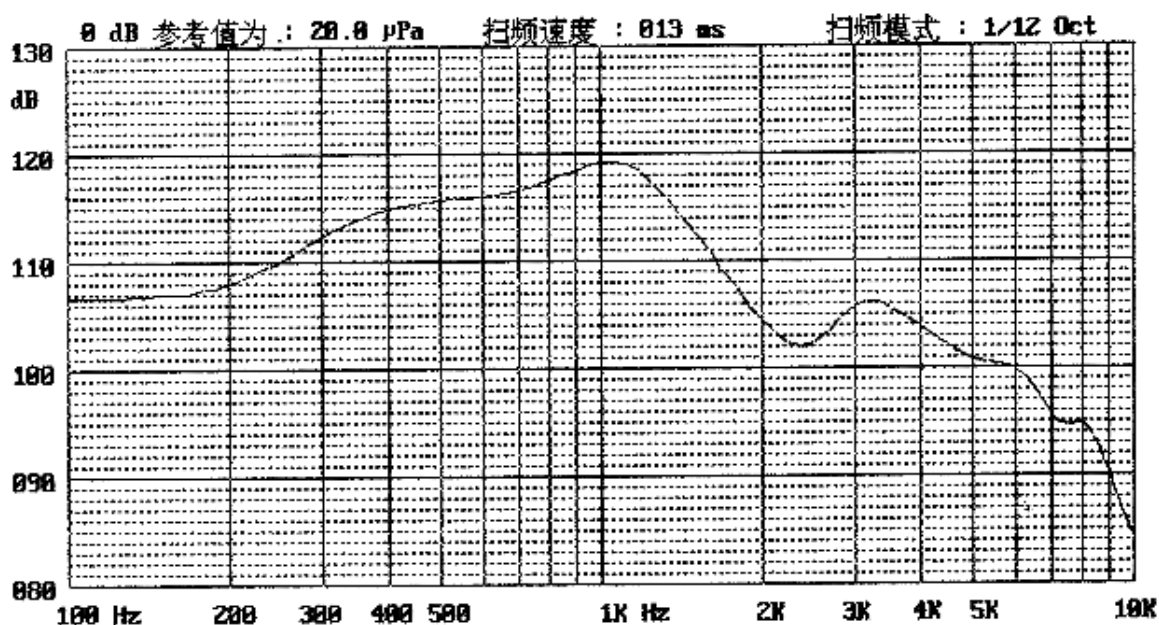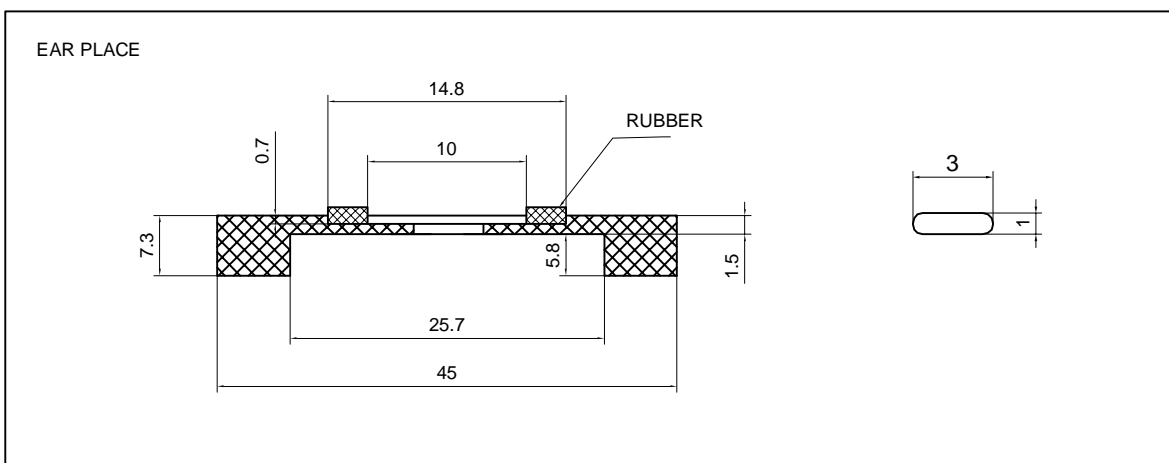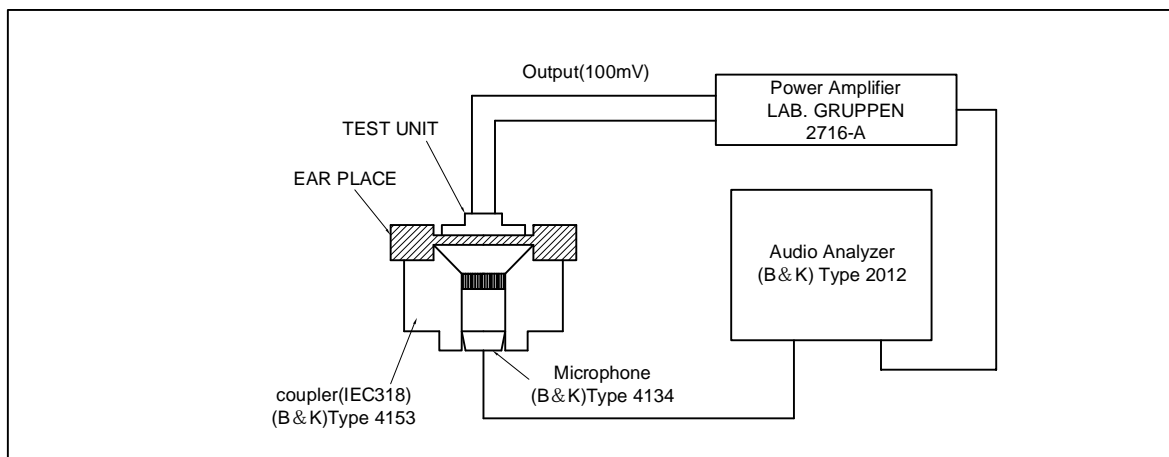

Specification for Two Mode Speaker		Page	7/10
Model No. : KP1710M1		Revision No.	1.1
		Drawing No.	kfc1785


6. Structure

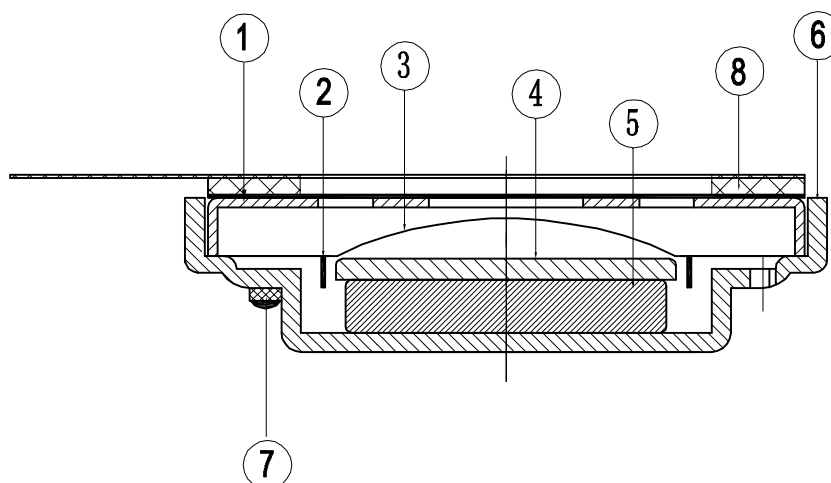

8	Gasket	1	unwoven fabric	800+2B+800
7	Terminal	1	Epoxy PCB	
6	Frame	1	SPC	
5	Magnet	1	Nd-Fe-B	
4	Plate	1	SPC	
3	Diaphragm	1	PEI	
2	Coil	1	Copper	
1	Cap	1	SUS304	
No.	Part Name	Q'TY	Material	Remarks

Specification for Two Mode Speaker		Page	8/10
Model No. : KP1710M1		Revision No.	1.1
		Drawing No.	kfc1785

7. Dimensions

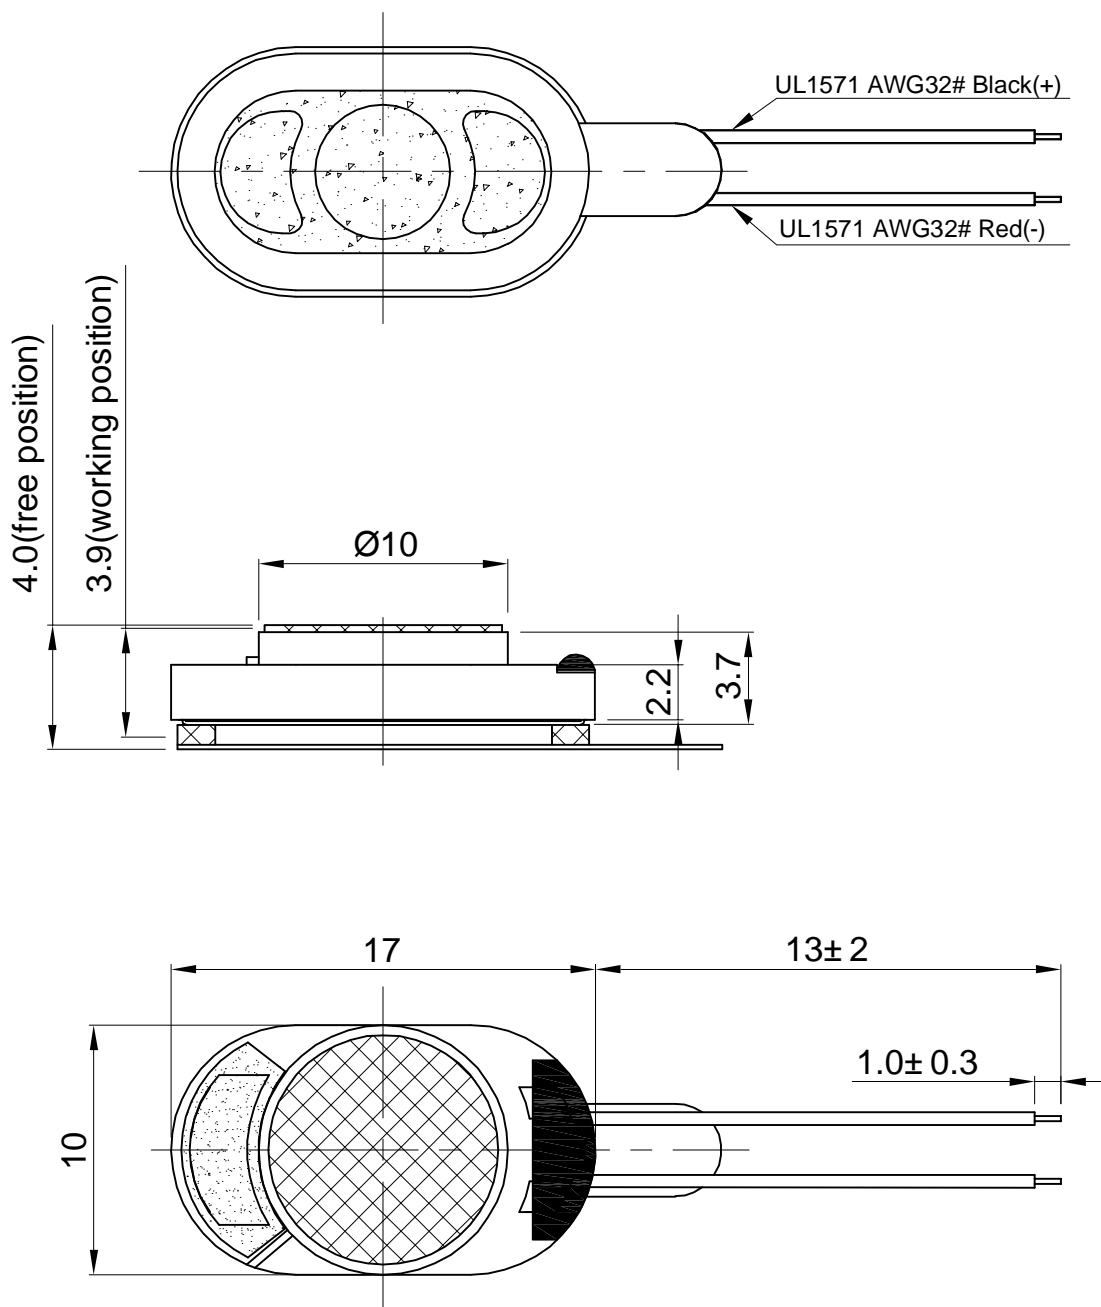

FIRST ANGLE PROJECTION




UNIT : mm




Tolerance : ±0.2

Specification for Two Mode Speaker		Page	9/10
Model No. : KP1710M1		Revision No.	1.1
		Drawing No.	kfc1785

8. Packing

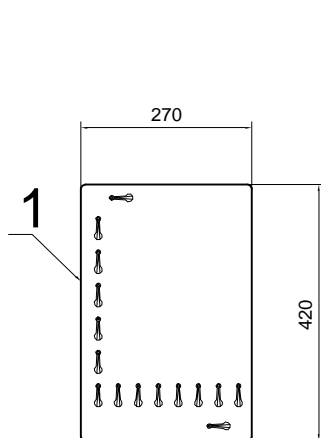

100Pcs

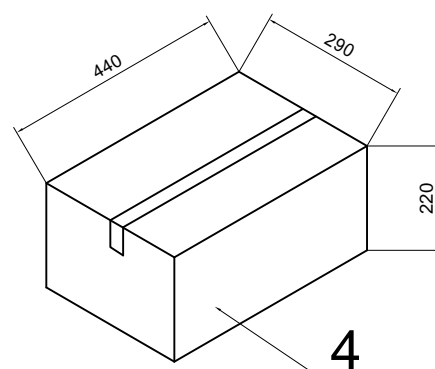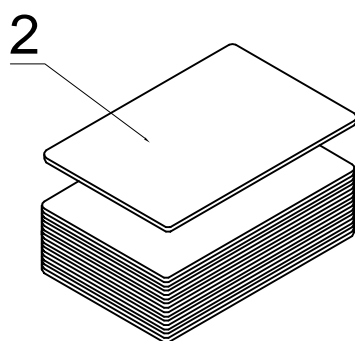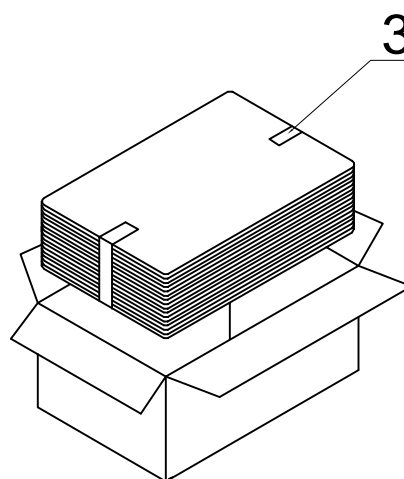

QTY: 2000Pcs
440 x290 x220

