


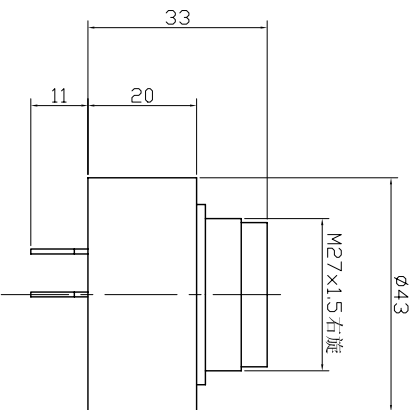


SPECIFICATION

- 1. Rated Voltage 12VAC
- 2. Operating Voltage 6~15VAC
- 3. Max. Rated Current 20mA at 12VAC
- 4. Min. Sound Pressure Level 80dB at 12VAC/60cm
- 5. Tone Nature Fast pulse
- 6. Resonant Frequency 2.9±0.5KHz
- 7. Case Material PC
- 8. Operating Temperature -20~+80°C
- 9. Store Temperature -30~+100°C
- 10. Weight 40g



No.	DESCRIPTION	APPROVED	DATE	<div style="text-align: center;"> <p>KEPO NINGBO KEEP IMPROVING ELECTRONIC CO.,LTD http://www.chinaacoustic.com</p> </div>			
TOLERANCES UNLESS NOTED OTHERWISE		APPROVALS	DATE				
.XX ± .XXX ± 90° ANGLES ±1° FIRST ANGLE PROJECTION		CHECKED					
		APPROVED	03.10.30	UNIT	DWG NO.	SHEET	VER.
				mm	KP3.840.113.02		1.0
				SCALE	NOT TO SCALE		