
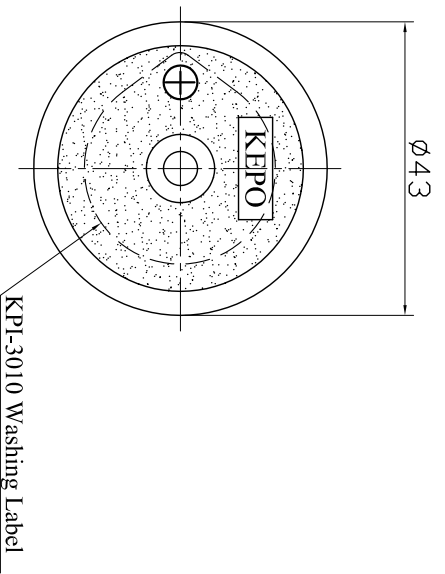
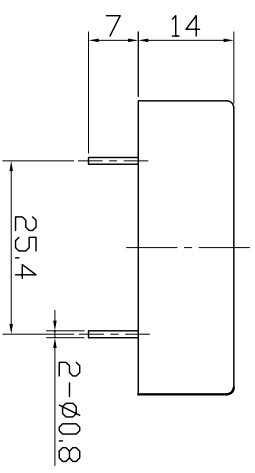


Specifications

- 1. Rated Voltage..... 12VDC
- 2. Operating Voltage..... 3~20VDC
- 3. Max. Rated Current..... 10mA at 12VDC
- 4. Min. Sound Pressure Level..... 100dB at 12VDC/30cm
- 5. Resonant Frequency..... 2.9±0.5KHz
- 6. Tone Nature..... Continuous
- 7. Shell Material/Color..... ABS/Black
- 8. Operating Temperature..... -20~+60°C
- 9. Store Temperature..... -30~+70°C
- 10. Weight..... 11g



Compliance with ROHS		KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
No.	DESCRIPTION	APPROVED	DATE
NOISE PERFORMANCE X, XX, + 90° FORMED ±2° FIRST ANGLE PROJECTION		DRAWN	DATE
APPROVALS 梁博榮 水成偉		CHECKED	DATE
APPROVED		APPROVED	09.01.18
UNIT		SCALE	SHEET
mm		NOT TO SCALE	OEM2948R
Piezo buzzer Quartz-1		DWG NO.	VER 1.0
KPI-G4330-2948		OEM2948R	VER 1.0