

1

2

3

4

5

6

7

8

A

B

C

D

E

F

A




B

C

D

E

F

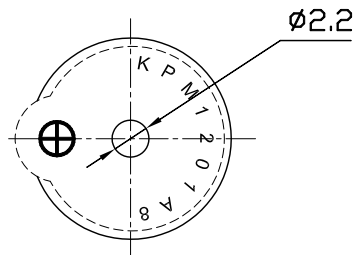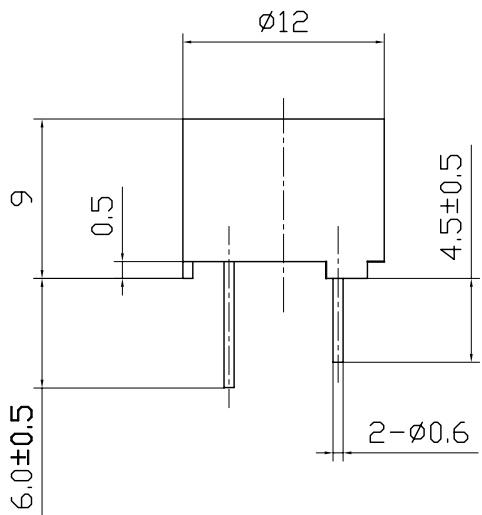

SPECIFICATION

- 1. Rated Voltage 1.5V
- 2. Operating Voltage 1~2V
- 3. Max. Rated Current 30mA
- 4. Coil Resistance $16 \pm 2 \Omega$
- 5. Coil Impedance 40Ω
- 6. Min. Sound Pressure Level 85dB/10cm
- 7. Resonant Frequency 2800Hz
- 8. Case Material PBT
- 9. Operating Temperature $-20 \sim +70^\circ\text{C}$
- 10. Store Temperature $-30 \sim +80^\circ\text{C}$
- 11. Weight 2g

				KEPO NINGBO KEEP IMPROVING ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
				Magnetic Buzzer KPM-1201A8	
No.	DESCRIPTION	APPROVED	DATE		
<small>TOLERANCES UNLESS NOTED OTHERWISE X ± .XX ± .XXX ± 90° FORMED ±1° ANGLES -1°</small>		APPROVALS		DATE	
		DRAWN			
		CHECKED		UNIT	DWG NO.
		APPROVED		mm	KP3.840.683
			04.02.11	SCALE	SHEET
				NOT TO SCALE	VER 1.0