


受 控

SPECIFICATION

- 1. Rated Voltage 5V
- 2. Operating Voltage 4~8 V
- 3. Max. Rated Current 120mA
- 4. Coil Resistance $16 \pm 4 \Omega$
- 5. Coil Impedance 40Ω
- 6. Min. Sound Pressure Level 85dB/10cm
- 7. Resonant Frequency 2200Hz
- 8. Case Material/Color PBT/Black
- 9. Operating Temperature $-20 \sim +70^\circ\text{C}$
- 10. Store Temperature $-30 \sim +80^\circ\text{C}$
- 11. Weight 2g

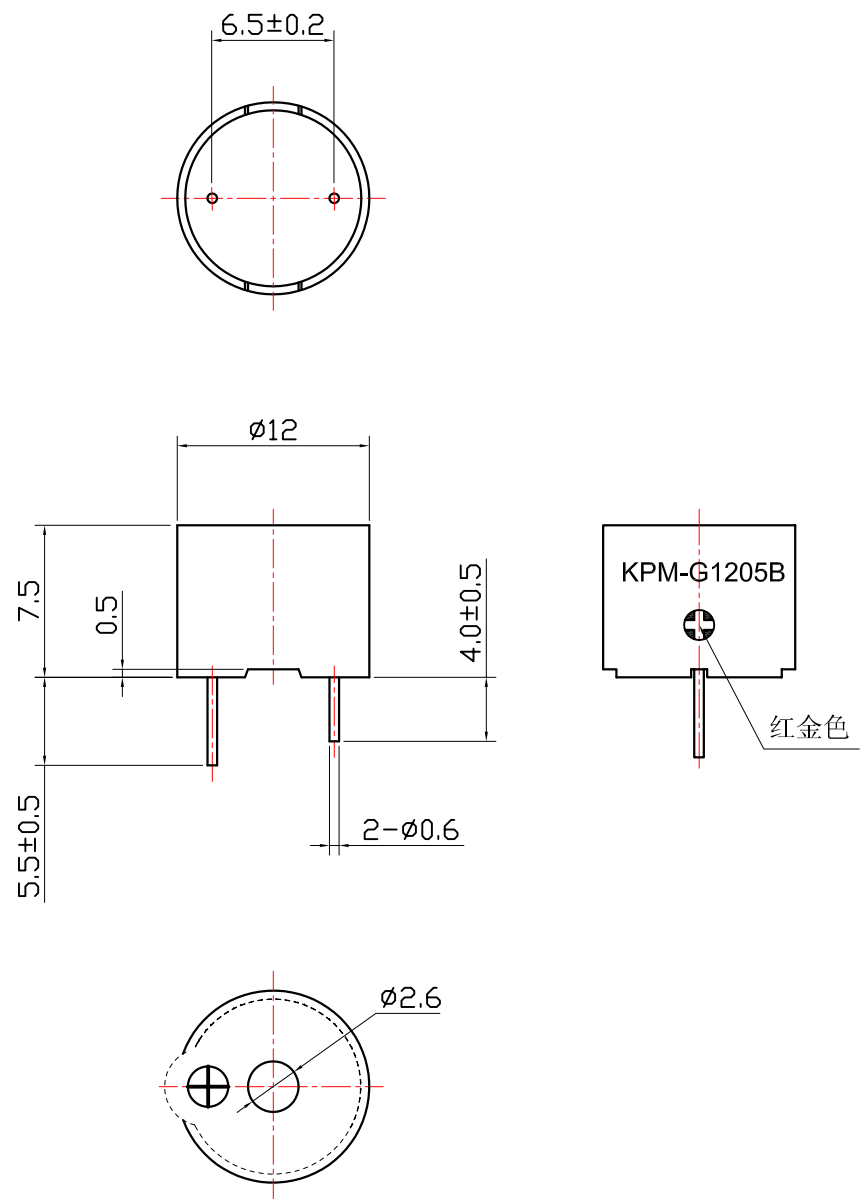

				KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
				Magnetic Buzzer KPM-G1205B	
No.	DESCRIPTION	APPROVED	DATE		
TOLERANCES UNLESS NOTED OTHERWISE X ± .XX ± .XXX ± 90° FORMED ±2° ANGLES -1°		APPROVALS		DATE	UNIT
		DRAWN	10.09.14		DWG NO.
		CHECKED	10.09.14	mm	KP3.843.687R
FIRST ANGLE PROJECTION		APPROVED	10.09.14	SCALE	SHEET
				NOT TO SCALE	VER 1.2