

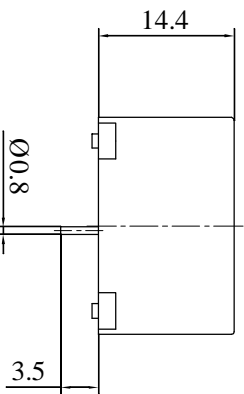


SPECIFICATION

- 1. Rated Voltage12VDC
- 2. Operating Voltage9~15VDC
- 3. Max. Rated Current30mA at 12VDC
- 4. Resonant Frequency400±100Hz
- 5. Min. Sound Pressure Level.....75dB at 12VDC/20cm
- 6. Response Time.....≤50ms
- 7. Case MaterialABS
- 8. Operating Temperature-20~+60℃
- 9. Store Temperature-30~+70℃
- 10. Weight10g

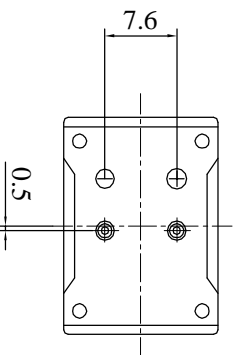

KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinacoustic.com			
Magnetic Buzzer KPMB-2212P			
NO.	DESCRIPTION	APPROVED	DATE
1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12. 13. 14. 15. 16. 17. 18. 19. 20. 21. 22. 23. 24. 25. 26. 27. 28. 29. 30. 31. 32. 33. 34. 35. 36. 37. 38. 39. 40. 41. 42. 43. 44. 45. 46. 47. 48. 49. 50. 51. 52. 53. 54. 55. 56. 57. 58. 59. 60. 61. 62. 63. 64. 65. 66. 67. 68. 69. 70. 71. 72. 73. 74. 75. 76. 77. 78. 79. 80. 81. 82. 83. 84. 85. 86. 87. 88. 89. 90. 91. 92. 93. 94. 95. 96. 97. 98. 99. 100.			
DRAWN: _____ CHECKED: _____ APPROVED: _____			
UNIT: mm SCALE: 05.05.05			
FIRST ANGLE PROJECTION			
KP3.841.606		SHEET	VER 1.1