

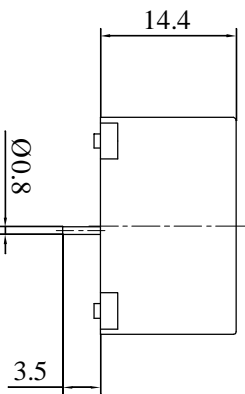


# SPECIFICATION

- 1. Rated Voltage .....24VDC
- 2. Operating Voltage .....15~27VDC
- 3. Max. Rated Current .....30mA at 24VDC
- 4. Resonant Frequency .....400±100Hz
- 5. Min. Sound Pressure Level.....75dB at 24VDC/20cm
- 6. Response Time.....≤50ms
- 7. Case Material .....ABS
- 8. Operating Temperature .....-20~+60℃
- 9. Store Temperature .....-30~+70℃
- 10. Weight .....10g

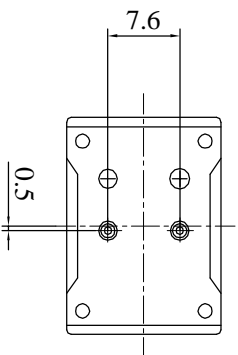

No.		DESCRIPTION		APPROVED	DATE	<b>KEPO</b> NINGBO KEPO ELECTRONIC CO.,LTD <a href="http://www.chinacoustic.com">http://www.chinacoustic.com</a>
DESIGN/ENGINEER/INSP		NOTED/OTHER/REV		APPROVALS	DATE	
XXX	XX	XXX	XX	DRAWN		
XXX	XX	XXX	XX	CHECKED		
FIRST ANGLE PROJECTION		90° ANGLE		APPROVED	05.05.05	UNIT mm
				SCALE		DWG/NO
						KP3.841.607
						SHEET
						VER 1.1