
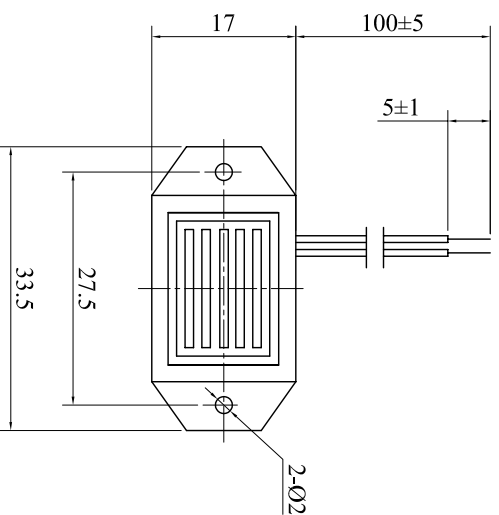


SPECIFICATION

1. Rated Voltage6VDC
2. Operating Voltage4~8VDC
3. Max. Rated Current30mA at 6VDC
4. Resonant Frequency400±100Hz
5. Min. Sound Pressure Level.....75dB at 6VDC/20cm
6. Case MaterialABS
7. Operating Temperature-20~+60℃
8. Store Temperature-30~+70℃
9. Weight8g

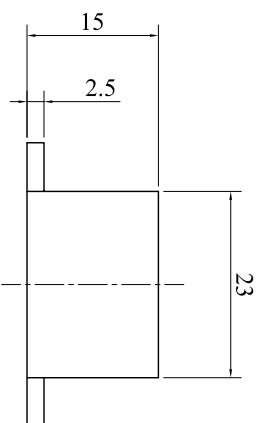

No.	DESCRIPTION	APPROVED	DATE	KEPO NINGBO KEEP IMPROVING ELECTRONIC CO.,LTD http://www.chinaacoustic.com Magnetic Buzzer KPMB-2306L1		
FOUR LETTERS, ENGLISH						
SIX LETTERS, OTHERS	APPROVALS	DATE				
XXX #	DRAWN					
XXX #	CHECKED			UNIT	DWG NO.	KP3.840.639
90° ANGLES ±1°	APPROVED			mm	SCALE	SHEET
FIRST ANGLE PROJECTION			03.01.15			VER. 1.0

1 2 3 4 5 6 7 8

A B C D E F