
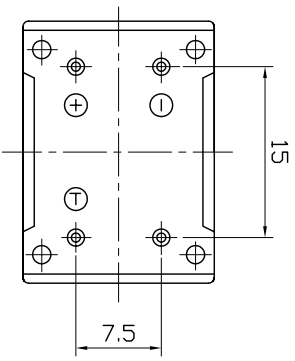
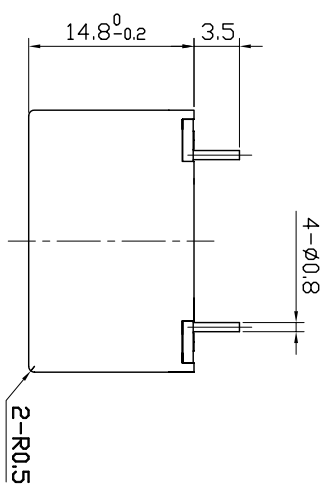


SPECIFICATION

- 1. Rated Voltage 12VDC
- 2. Operating Voltage 9~15VCC
- 3. Max. Rated Current 25mA at 12VDC
- 4. Min. Sound Pressure Level..... 80dB at 12VDC/20cm
- 5. Resonant Frequency..... 400±100Hz
- 6. Rated Trigger Voltage 12VDC
- 7. Rated Trigger Current ≤1mA
- 8. Shell Material/ Color ABS/Black
- 9. Operating Temperature -20~+60℃
- 10. Store Temperature -30~+70℃
- 11. Weight 8g

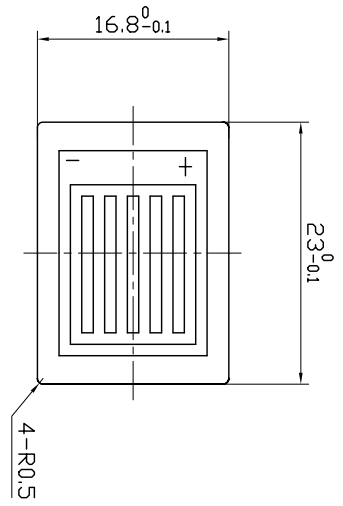

No.	DESCRIPTION	APPROVED	DATE	KEPO NINGBO KEEP IMPROVING ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
TOLERANCES, UNLESS NOTED OTHERWISE		APPROVALS	DATE		
XX ±		DRAWN			
XXX ±		CHECKED		UNIT	DWG. NO.
90° ANGLES ±1°		APPROVED		mm	KP3.840.647
FIRST ANGLE PROJECTION			03.08.04	SCALE	SHEET
					VER. 1.0