

KPMB-26XXLA MAGNETIC BUZZER

1. Application :

For buzzer in alarm systems.

2. General :

- 2.1 Out - Diameter : Ø 26 mm.
- 2.2 Height : 15.2 mm.
- 2.3 Weight : 12 g.
- 2.4 Operating Temperature range : -20 ~ +60°C without loss of function
- 2.5 Store Temperature range : -30 ~ +70°C without loss of function

3. Electrical and Acoustic Characteristics :



Test condition : 15 ~ 35°C, 25% ~ 85% RH, 860 ~ 1060 mbar

No.	Items	KPMB-G2606LA	KPMB-G2609LA	KPMB-G2612LA	KPMB-G2624LA
1	Rated Voltage	6 VDC	9 VDC	12 VDC	24 VDC
2	Operating Voltage	4 ~ 8 VDC	6 ~ 12 VDC	9 ~ 15 VDC	15 ~ 27 VDC
3	Max. Rated Current	25 mA / 6 VDC	30 mA / 9 VDC	30 mA / 12 VDC	25 mA / 24 VDC
4	Resonant Frequency	400 ± 100 Hz	400 ± 100 Hz	400 ± 100 Hz	400 ± 100 Hz
5	Min. Sound Pressure Level	80dB / 6VDC / 20cm	80dB / 9VDC / 20cm	85dB / 12VDC / 20cm	85dB / 24VDC / 20cm
6	Tone Nature	Continuous	Continuous	Continuous	Continuous
7	Case Material / Color	ABS / Black	ABS / Black	ABS / Black	ABS / Black

4. Picture :



5. Dimensions :

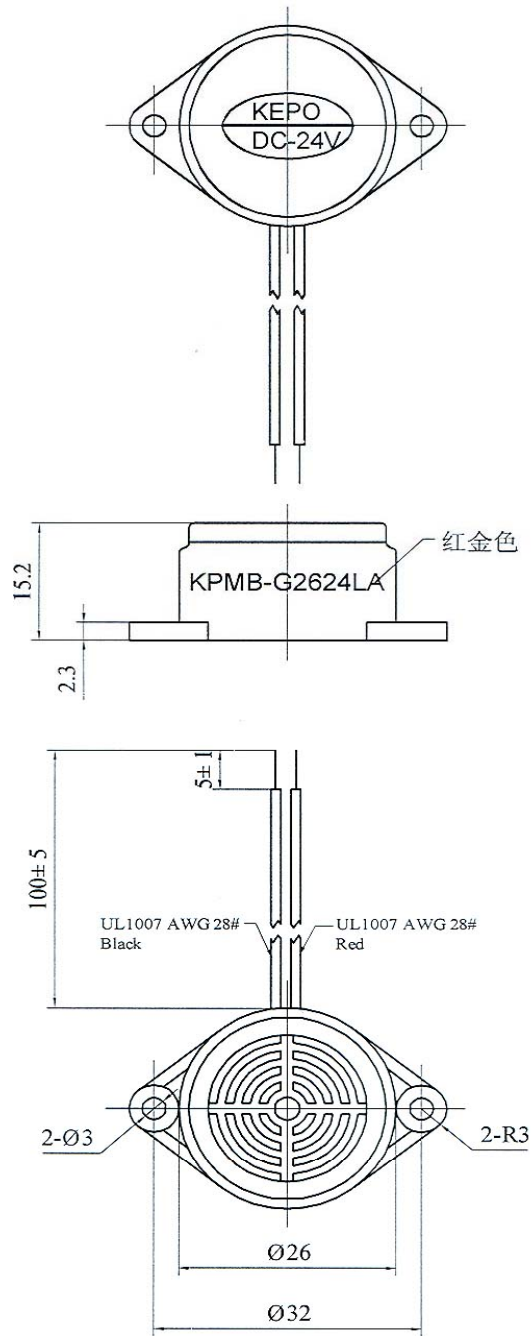

UNIT : mm
Tolerance : ± 0.5