


SPECIFICATION

- 1. Rated Voltage 3 VDC
- 2. Operating Voltage 2~5 VDC
- 3. Max. Rated Current 30mA/3VDC
- 4. Min. Sound Pressure Level 80dB/10cm
- 5. Resonant Frequency 2300±300HZ
- 6. Response Time 50ms
- 6. Case Material PBT
- 7. Operating Temperature -20~+70℃
- 8. Store Temperature -30~+80℃
- 9. Weight 2g

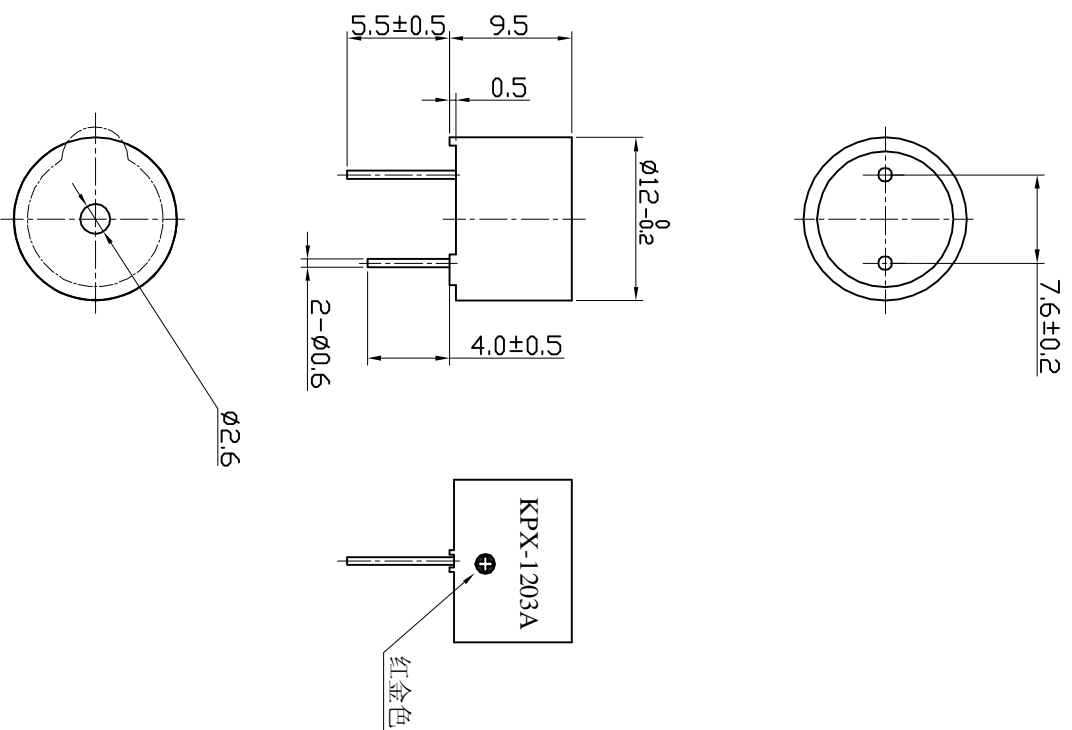

KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
Magnetic Buzzer KPX-1203A	
No. _____	DATE _____
DESCRIPTION _____	DATE _____
APPROVALS _____	DATE _____
DRAWN _____	DATE _____
CHECKED _____	DATE _____
APPROVED _____	DATE _____
UNIT: mm	DRAWING: KP3,8,40,687
SCALE: NOT TO SCALE	SHEET: _____
DATE: 03.10.30	VER: 1.1