


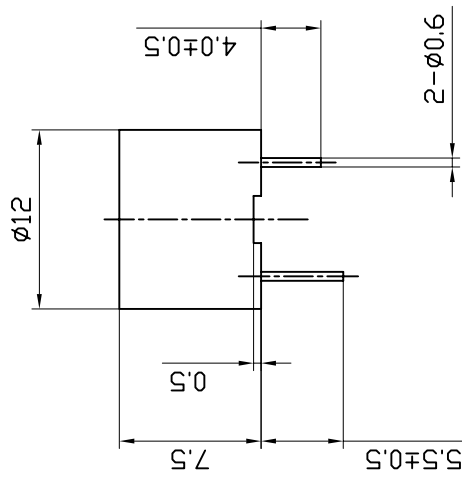


# SPECIFICATION

- 1. Rated Voltage ..... 3VDC
- 2. Operating Voltage ..... 2~5VDC
- 3. Max. Rated Current ..... 30mA/3VDC
- 4. Min. Sound Pressure Level ..... 85dB/10cm
- 5. Resonant Frequency ..... 3100±500Hz
- 6. Response Time ..... 50ms
- 7. Case Material ..... PBT
- 8. Operating Temperature ..... -20~+70°C
- 9. Store Temperature ..... -30~+80°C
- 10. Weight ..... 2g



<b>KEPO</b> NINGBO KEPO ELECTRONIC CO.,LTD <a href="http://www.chinaacoustic.com">http://www.chinaacoustic.com</a>		Magnetic Buzzer <b>KPX-1203B</b>	
No.	DESCRIPTION	APPROVED	DATE
TOLERANCES UNLESS NOTED OTHERWISE: XX ± XXX ± 90° ANGLES ±° FIRST ANGLE PROJECTION		DRAWN	DATE
		CHECKED	
		APPROVED	07.08.16
		UNIT	mm
		DWG. NO.	KP3.840.691
		SCALE	NOT TO SCALE
		SHEET	1.3