

SPECIFICATION

Customer : QUARTZ

Applied To :

受 控

Product Name : Magnetic Buzzer

Model Name : KPX-G1212AL-K10300


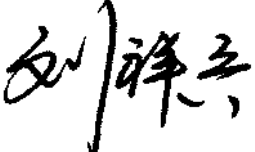
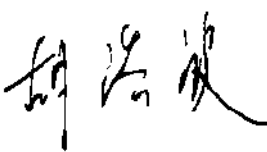
Drawing No. : OEM10300R

Compliance with ROHS(本品符合ROHS指令)

Signature of Approval

| |
|--|
| |
|--|

Signature of KEPO

| Approved by | Checked by | Issued by | Date |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|------|
|  |  |  | |

宁波凯普电子有限公司



Ningbo Kepo Electronics Co.,Ltd.

宁波东钱湖镇东钱湖工业区宝源路25号

TEL:+86-574-88370330 FAX:+86-574-88370329

No.25 Baoyuan road Dongqian Lake, Industry Area, Dongqian town,Ningbo City,
China(Post Code:315121)

Sales@chinaacoustic.com www.chinaacoustic.com

| | | | |
|-----------------------------------|--------------------|--------------|-----------|
| Specification for Magnetic Buzzer | | Page | 2/10 |
| | | Revision No. | 1.0 |
| Model No. : | KPX-G1212AL-K10300 | Drawing No. | OEM10300R |

CONTENTS

1. **Scope**
范围
2. **General**
概要
3. **Electrical and Acoustic Characteristics.**
电声参数
4. **Reliability Test**
可靠性试验
5. **Measurement Block Diagram &Response curve**
测试图和曲线图
6. **Structure**
结构
7. **Dimensions**
尺寸
8. **Packing**
包装
9. **Revision**
履历表

| | | | |
|-----------------------------------|--------------------|--------------|-----------|
| Specification for Magnetic Buzzer | | Page | 3/10 |
| | | Revision No. | 1.0 |
| Model No. : | KPX-G1212AL-K10300 | Drawing No. | OEM10300R |

1. Scope

This product specification is applied to the Magnetic Buzzer in alarm systems. Please contact us when using this product for any other applications than described in the above.

本规格书适用于电磁式蜂鸣器，通常它用在系统中做报警或提示的蜂鸣器用，如果将该产品用于其它领域，请与我们联系。

2. General

2.1 Out-Diameter : Ø12 mm

外径: Ø12 mm

2.2 Height : 9.5 mm

高度: 9.5 mm

2.3 Weight : 2 g

重量: 2克

2.4 Operating Temperature range:

-20~+70°C without loss of function

工作温度: -20~+70°C

Store Temperature range:

-30~+80°C without loss of function

储藏温度: -30~+80°C

2.5 According to the No.7 of RoHS Exemptions, lead-based solder alloys containing 85% by weight or more lead (Sn10Pb90)

根据"欧盟RoHS指令豁免条款"第7条规定,使用了铅含量超过85%的锡铅合金焊料(Sn10Pb90)

3. Electrical and Acoustic Characteristics.

Test condition : 15 ~ 35 °C, 25% ~ 85% RH, 860~1060 mbar

测试条件: 15~35 °C, 25%~85%RH, 860~1060mbar

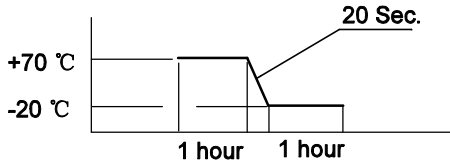
| | Items 项目 | Specification 规格 |
|---|-----------------------------------|---------------------|
| 1 | Rated Voltage 额定电压 | 12VDC |
| 2 | Operating Voltage 工作电压 | 8~15VDC |
| 3 | Max. Rated Current 额定电流 | 30mA/12VDC |
| 4 | Resonant Frequency 谐振频率 | 2.3±0.3KHz |
| 5 | Min. Sound Pressure Level 额定声压 | 85dB/12VDC/10cm |
| 6 | Tone Nature 音调 | Continuous (直音) |
| 7 | Case Material/Color 壳体材质/颜色 | PBT/BLACK |

| | | | |
|-----------------------------------|--------------------|--------------|-----------|
| Specification for Magnetic Buzzer | | Page | 4/10 |
| | | Revision No. | 1.0 |
| Model No. : | KPX-G1212AL-K10300 | Drawing No. | OEM10300R |

4. Reliability Test

After test(1~6item), the Buzzer S.P.L . difference shall be within $\pm 10\text{dB}$, Frequency difference shall be within $\pm 0.5\text{KHz}$. and the appearance not exist any change to be harmful to normal operation(e.g. cracks,rusts,damages and especially distortion).

在1-6项试验后，蜂鸣器的声压变化值在 $\pm 10\text{dB}$ 之内，频率变化在 $\pm 0.5\text{KHZ}$ 之内。外观无变化（例如：开裂、生锈、损伤、变形等现象）。

| | | |
|---|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | High Temperature Test 高温试验 | <p>After being placed in a chamber with $+70\pm 2^\circ\text{C}$ for 240 hours and then being placed in natural condition for 2 hours, sounder shall be measured.</p> <p>放置于温度$+70\pm 2^\circ\text{C}$的烘箱内240小时，然后取出，在常温下放置2小时后，测试声响器。</p> |
| 2 | Low Temperature Test 低温试验 | <p>After being placed in a chamber with $-20\pm 2^\circ\text{C}$ for 240 hours and then being placed in natural condition for 2 hours, sounder shall be measured.</p> <p>放置于温度$-20\pm 2^\circ\text{C}$的制冷箱内240小时，然后取出，在常温下放置2小时后，测试声响器</p> |
| 3 | Humidity Test 潮湿试验 | <p>After being placed in a chamber with 90 to 95%R.H. at $+40\pm 2^\circ\text{C}$ for 240 h and then being placed in natural condition for 2h , sounder shall be measured.</p> <p>将产品置于湿度为 90~95%R.H，温度为$40\pm 2^\circ\text{C}$试验箱中 240小时，然后在正常大气压条件下恢复2小时后，进行测量</p> |
| 4 | Thermal Shock Test 热冲击试验 | <p>After being worked in a chamber at $+70\pm 2^\circ\text{C}$ for 1 hour, then sounder shall be placed in a chamber at $-20\pm 2^\circ\text{C}$ for 1 hour(1 cycle is the below diagram).</p> <p>After 6 above cycles, sounder shall be measured after being placed in natural condition for 1 hour.</p> <p>将产品置于$70\pm 2^\circ\text{C}$试验箱中，先工作1小时，然后将产品置于$-20\pm 2^\circ\text{C}$试验箱中，再工作1小时，经过6个循环后，在正常大气压条件下恢复1小时，进行测量</p>  |

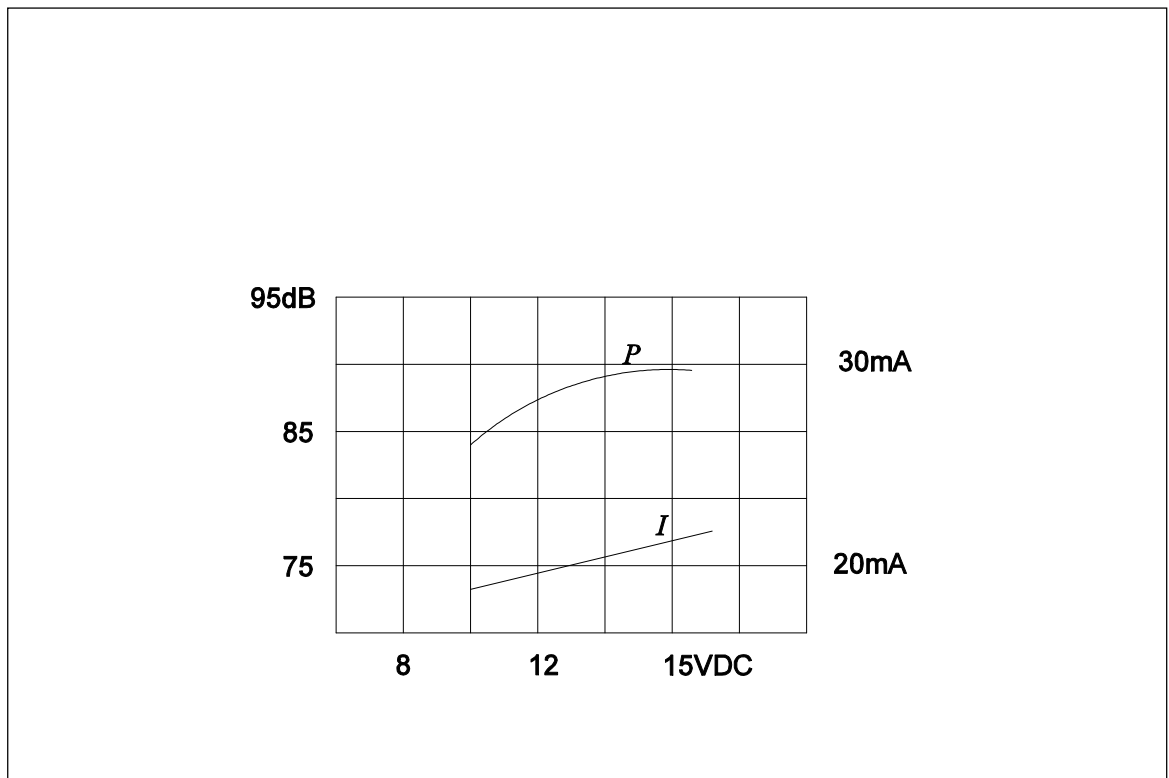
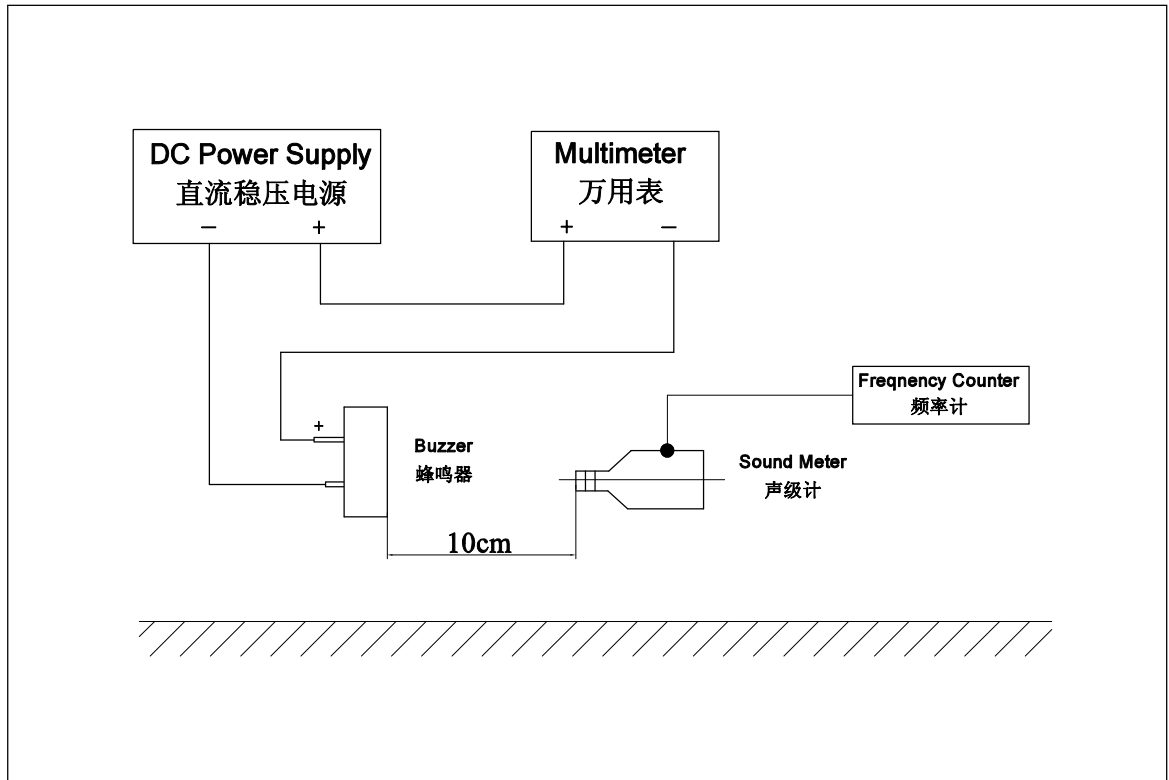
| | | | |
|-----------------------------------|--------------------|--------------|-----------|
| Specification for Magnetic Buzzer | | Page | 5/10 |
| | | Revision No. | 1.0 |
| Model No. : | KPX-G1212AL-K10300 | Drawing No. | OEM10300R |

4. Reliability Test

| | Item | Specification |
|---|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5 | Vibration Resistance 振动试验 | <p>Sounder shall be measured after being applied vibration of amplitude of 1.5mm with 10 to 30Hz band of vibration frequency to each of 3 perpendicular directions for 2 hour.</p> <p>振幅为1.5mm，频率为10~30Hz，三个不同轴方向各振动2小时，试验后进行测量。</p> |
| 6 | Drop Test 跌落试验 | <p>Sounder packed in the carton are dropped in six direction from the height of 80cm to the concrete floor.</p> <p>跌落高度80cm,6个不同方向整箱跌落到水泥地，试验后进行测量。</p> |
| 7 | 连续运行 continuum run | <p>12VDC/240小时</p> <p>12VDC/240hours</p> |
| | | |

| | | | |
|-----------------------------------|--------------------|--------------|-----------|
| Specification for Magnetic Buzzer | | Page | 6/10 |
| | | Revision No. | 1.0 |
| Model No. : | KPX-G1212AL-K10300 | Drawing No. | OEM10300R |

5. Measurement Block Diagram & Response curve



| | | | |
|-----------------------------------|--------------------|--------------|-----------|
| Specification for Magnetic Buzzer | | Page | 7/10 |
| | | Revision No. | 1.0 |
| Model No. : | KPX-G1212AL-K10300 | Drawing No. | OEM10300R |

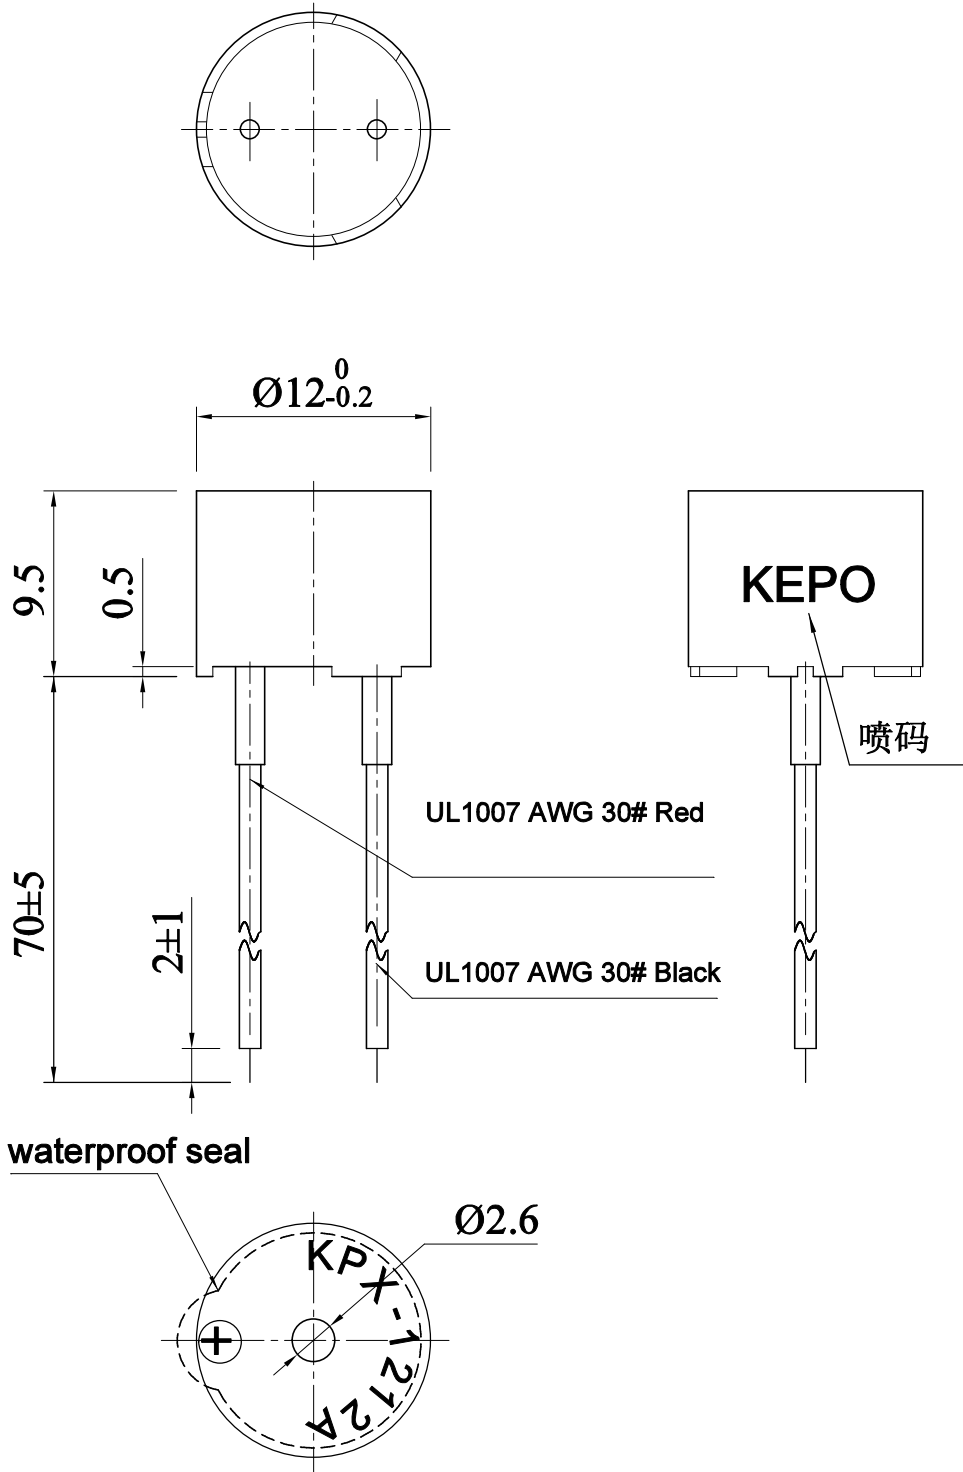
6. Structure



| | | | | |
|-----|------------------------|------|----------------|-----------|
| 7 | Wire 引线 | 1 | UL1007/AWG 30# | |
| 6 | Case 壳体 | 1 | PBT | |
| 5 | T Core T 铁 | 1 | Fe | |
| 4 | Coil 线圈 | 1 | QANR | |
| 3 | Magnetic ring 磁环 | 1 | — | |
| 2 | PCB with pin 带导针印制板 | 1 | — | |
| 1 | Diaphragm 膜片 | 1 | — | |
| No. | Part Name 型号 | Q'TY | Material 材质 | SGS 编号 |

| | | | |
|-----------------------------------|--------------------|--------------|-----------|
| Specification for Magnetic Buzzer | | Page | 8/10 |
| | | Revision No. | 1.0 |
| Model No. : | KPX-G1212AL-K10300 | Drawing No. | OEM10300R |

7. Dimensions



FIRST ANGLE PROJECTION



UNIT : mm

Tolerance : ± 0.5

| | | |
|-----------------------------------------------------|--------------|-----------|
| Specification for Magnetic Buzzer | Page | 9/10 |
| | Revision No. | 1.0 |
| Model No. : KPX-G1212AL-K10300 | Drawing No. | OEM10300R |

8. Packing



QTY: 1600PCS
425x275x220mm

