

1

2

3

4

5

6

7

8

A





B

C

D

E

F

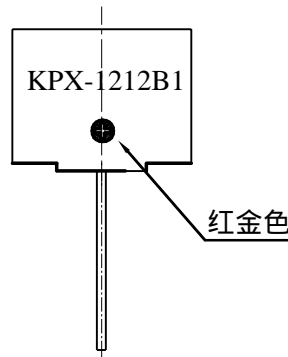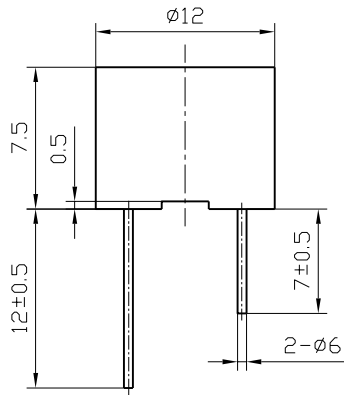

SPECIFICATION

- 1. Rated Voltage 12 VDC
- 2. Operating Voltage 8~15VDC
- 3. Max. Rated Current 30mA/12VDC
- 4. Min. Sound Pressure Level 85dB/10cm
- 5. Response Time..... 50ms
- 6. Resonant Frequency 3100±500Hz
- 7. Case Material PBT
- 8. Operating Temperature -20~+70°
- 9. Store Temperature -30~+80°
- 10. Weight 2g

				KEPO NINGBO KEPO IMPROVING ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
				Magnetic Buzzer	
				KPX-1212B1	
No.	DESCRIPTION	APPROVED	DATE		
TOLERANCES UNLESS NOTED OTHERWISE X ± .XX ± .XXX ± 90° FORMED ±2° ANGLES ±1°		APPROVALS	DATE	UNIT	DWG NO.
FIRST ANGLE PROJECTION		DRAWN		mm	KP3.840.718
		CHECKED		SCALE	SHEET
		APPROVED	04.04.12	NOT TO SCALE	VER 1.1