

BUZZER

SMT Buzzer Series



KLS3-SMT-11*1.7 11*9.0*1.7mm SMT Transducer Buzzer Series

SPECIFICATIONS

Rated Voltage	5V _{P-P}
Operating Voltage	1-25V _{P-P}
Max. Rated Current	3mA
Min. S.P.L. (@ 10cm)	MIN. 70dB at Rated Voltage at 10cm
Resonant Frequency	4.1KHz
Capacitance at 1000Hz	10000±30%pF
Operating Temp	-20 ~ +70 °C
Weight	0.3g



Dimensions (Unit:mm)

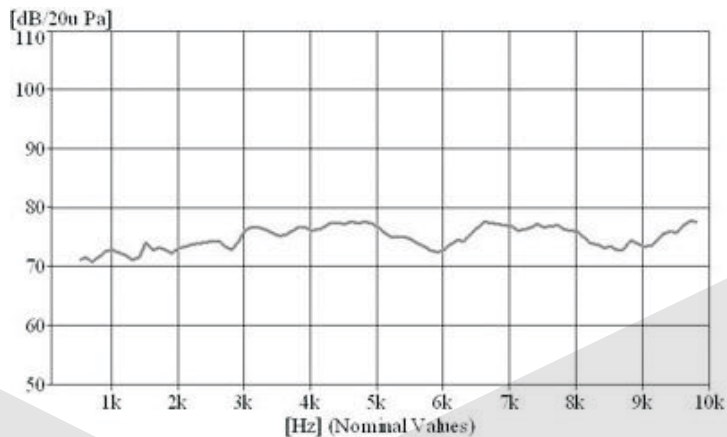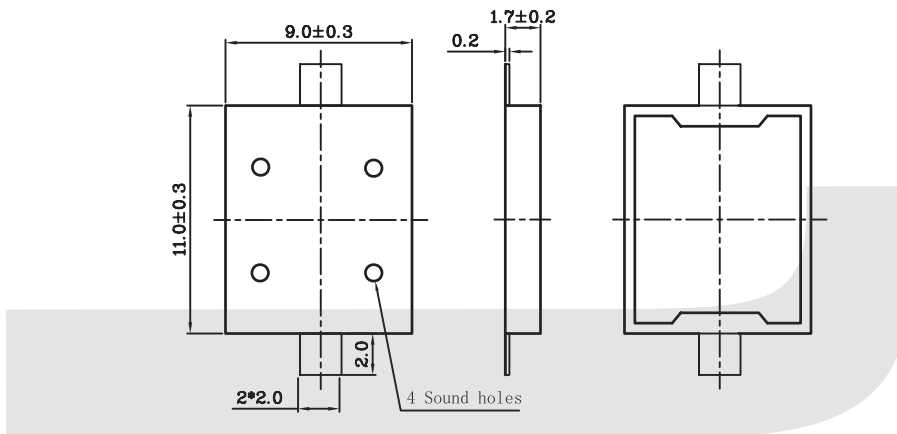

ORDER INFORMATION

Product NO.: KLS3-SMT - 11*1.7

Part Number

SMT Buzzer Series

Size specifications