

# Temperature Compensated Crystal Oscillators TCXO, M53T Series, CMOS Output



**MERCURY**  
Since 1973

## Features:

- ◆ 5x3.2x2.2 mm ceramic SMD TCXOs with CMOS square wave output
- ◆ 0.01 uF decoupling capacitor built-in
- ◆ Wide frequency range: 1.0 MHz to 200.0 MHz
- ◆ Ideal for cellular phone, GPS.



## General Specifications (at +25°C and specified input voltage)

<b>Product Series</b>		<b>M53T</b>				
<b>Frequency Range</b>		1.0 MHz ~ 200.0 MHz			NOTE: 32.768 KHz is also available	
<b>Output Wave Form</b>		<b>Square wave.</b> Wave form code is "T"				
<b>Initial Calibration Tolerance <sup>(1)</sup></b>		±2 ppm at +25°C±2°C and Vcon = +1.5 V D.C.				
<b>Standard Frequencies (partial list)</b>		10.0, 12.8, 13.0, 14.4, 16.0, 16.384, 19.2, 19.440, 19.680, 20.0, 38.880, 77.760, 155.520 MHz				
<b>Frequency Stability (ppm)</b>		±0.5 ppm	± 1 ppm	±1.5 ppm	±2.0 ppm	±2.5 ppm
<b>Temperature Range</b>	<b>0 to +50°C</b>	√	√	√	√	√
	<b>-10 to +60°C</b>	□	√	√	√	√
	<b>-20 to +70°C</b>	✗	√	√	√	√
	<b>-30 to +75°C</b>	✗	√	√	√	√
<b>Standard →</b>	<b>-40 to +85°C</b>	✗	√	√	√	√
<b>Frequency Stability vs Aging vs Voltage Change vs Load Change vs Reflow</b>		±1.0 ppm max. first year at +25°C ±2 ppm max. for a ±10% input voltage change ±0.3 ppm max. for a ±10% loading condition change ±1 ppm max. 1 reflow and measured 24 hours afterwards				
<b>Supply Voltage (V<sub>DD</sub>)</b>		+2.8 V (voltage code is "28")		+3.0 V (voltage code is "3")		+3.3 V (voltage code is "33")
<b>Current Consumption (typical)</b>		2 mA @ 8.192MHz; 4 mA @ 10 MHz; 17 mA @77.760 MHz; 35 mA @ 155.520 MHz				
<b>Output Voltage Level</b>	<b>Logic "1"</b>	90% V <sub>DD</sub> min.				
	<b>Logic "0"</b>	10% V <sub>DD</sub> max.				
<b>Rise Time and Fall Time</b>		1.5 ns typical; 2.0 nano.max. 10% ↔ 90% of V <sub>DD</sub>				
<b>Duty Cycle (Symmetry)</b>		50%±10% measured at 50% V <sub>DD</sub>				
<b>Start-up Time</b>		5 ms typical; 10 m. sec. max.				
<b>Output Load</b>		15 pF				
<b>SSB Phase Noise at +25°C</b>	<b>Offset</b>	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz
	<b>M53T33-100.000</b>	-72 dBc/Hz	-110 dBc/Hz	-125 dBc/Hz	-132 dBc/Hz	-125 dBc/Hz

**MERCURY** [www.mercury-crystal.com](http://www.mercury-crystal.com)

Taiwan: TEL (886)-2-2406-2779, FAX (886)-2-2496-0769, e-mail: [sales-tw@mercury-crystal.com](mailto:sales-tw@mercury-crystal.com)  
 U.S.A.: TEL (1)-909-466-0427, FAX (1)-909-466-0762, e-mail: [sales-us@mercury-crystal.com](mailto:sales-us@mercury-crystal.com)

# Temperature Compensated Crystal Oscillators TCXO, M53T Series, CMOS Output




**MERCURY**  
Since 1973

## Part Number Format and Example:

Part number example:		M53T3-20.000-2.5/-30+75					≠ = Please specify	
	≠		≠		≠		≠	
<b>M53T</b>	3	—	<b>20.000</b>	—	<b>2.5</b>	/	<b>-30+75</b>	
①	②		③		④		⑤	

①: Product Series. Use "M53T" for TCXO product. ②: Voltage code; Use "28" for +2.8 V; use "3" for +3.0 V; use "33" for +3.3 V; ③: Frequency in MHz ④: Frequency stability in ppm ⑤: Operating Temperature range in °C

## CMOS Square Wave TCXO Test Circuit and Output Wave Form:

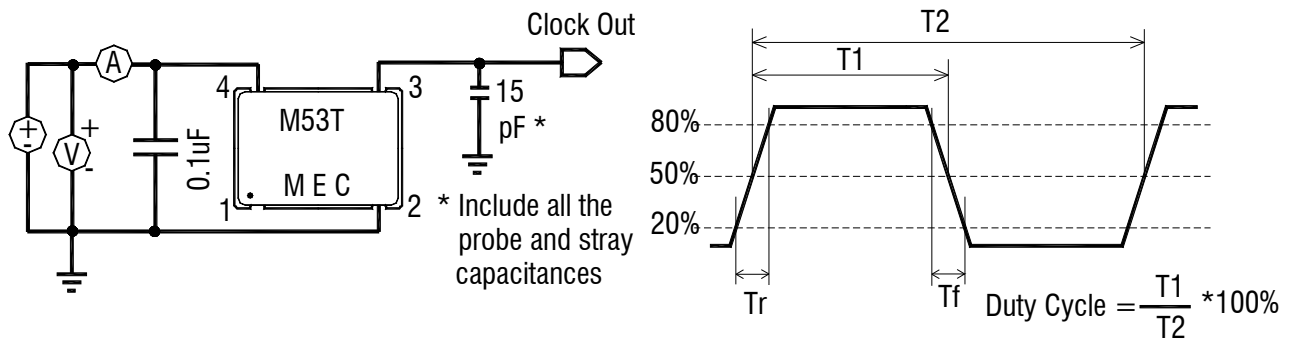

## Environment Performance Specifications


Green Requirement	RoHS compliant, Pb (lead) free
MSL Level	MSL 1 per IPC/JEDEC-STD-020C
Humidity	85% RH, 85°C, 48 hours. Crystal part only.
Hermeticity	Leak rate $2 \times 10^{-8}$ ATM-cm <sup>3</sup> /sec max. Crystal part only.
Solderability	MIL-STD-202F method 208E
Vibration	MIL-STD-202F method 204, 35G, 50 to 2000 Hz
Shock	MIL-STD-202F method 213B, test condi. E, 1000GG 1/2 sine wave
Storage temp. range	-55 to +125°C

# Temperature Compensated Crystal Oscillators TCXO, M53T Series, CMOS Output



**MERCURY**  
Since 1973


## Package Dimensions and Suggested Land Pattern: Unit: mm

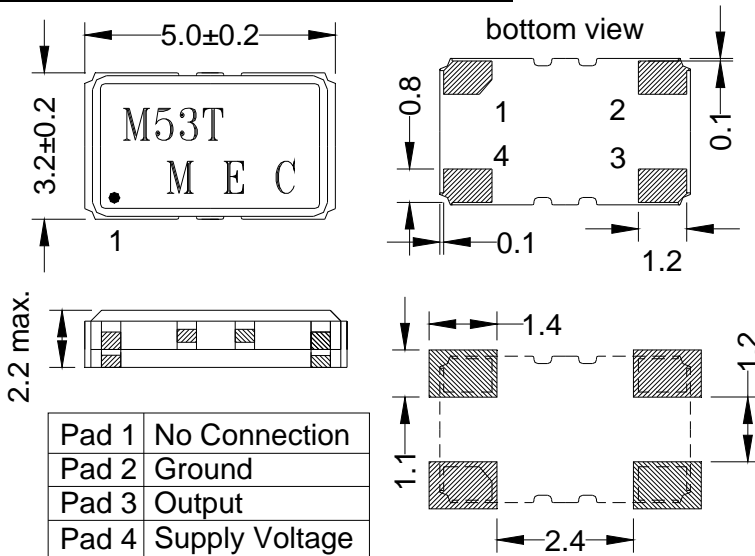

## Recommended Solder Reflow Profiles

240°C liquidus 235°C solidus temperature alloy is used in the assembly of M53T products.  
Do not exceed the reflow conditions given below.

Profile A (low temperature solder reflow): For Sn62 Pb36 Ag2 and Sn63 Pb37 alloy.

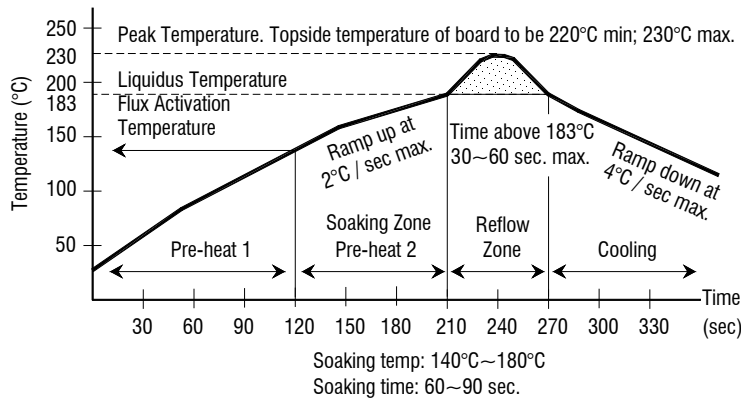

Profile B (high temperature solder reflow): For Sn96.5% Ag 3.5% Cu 0.5% alloy.

