

Surface Mount Monolithic Crystal Filter


MF38RB3S

Nominal Frequency (MHz):	38.85
Pass Bandwidth dB:	3
Pass Bandwidth KHz:	7.5
Attenuation Bandwidth dB:	30
Attenuation Bandwidth KHz:	25
Ripple dB:	1
Loss dB:	3
Spurious dB:	40
Guaranteed Attenuation dB:	80
Impedance R:	550
Impedance C1(pF):	4
Impedance C2(pF):	13
Element:	2

Example of Characteristics:

MF38RB3S

CH1 S21 log MAG 10dB/REF-72.4dB
CH2 S21 log MAG 1dB/REF-27.5dB

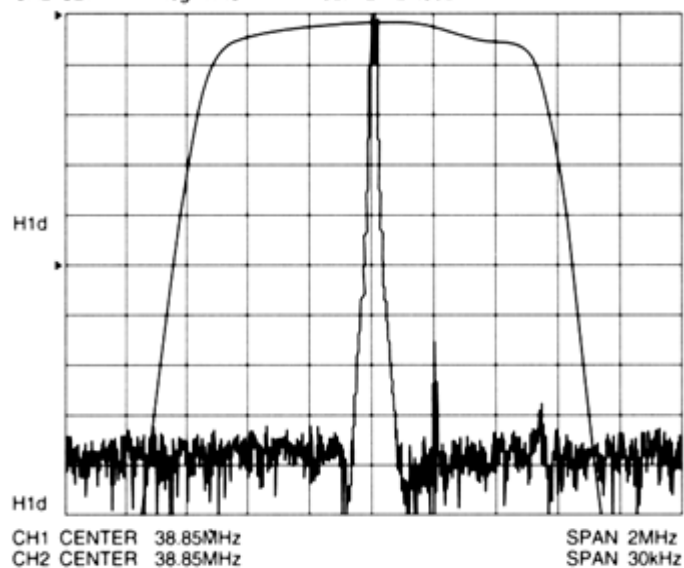

Outer Appearance:

J TMFS-3

