

NX3225GA

For OA / AV

■ Features

A small surface-mount type crystal unit, especially suited for small-sizing requirements.

- Compact and thin. (3.2 x 2.5 x 0.75 mm typ.)
- Excellent environmental characteristics, including heat and shock resistance.
- Excellent electrical performance for OA (office automation) and AV (audiovisual) applications.
- Meets the requirements for re-flow profiling using lead-free solder.




RoHS Compliant
Directive 2011/65/EU

■ Specifications

| Item | Model | NX3225GA |
|---|-------|------------------------|
| Nominal Frequency | | 9.840 to 50 MHz |
| Overtone Order | | Fundamental |
| Frequency Tolerance (25 ±3 °C) | | ±20 × 10 ⁻⁶ |
| Frequency versus Temperature Characteristics (with reference to +25 °C) | | ±30 × 10 ⁻⁶ |
| Operating Temperature Range | | -40 to +85 °C |
| Storage Temperature Range | | -40 to +85 °C |
| Equivalent Series Resistance | | Refer to *1 |
| Level of Drive | | 10 μW (Max. 200 μW) |
| Load Capacitance | | 8pF |
| Specifications Number | | STD-CRG-2 |

■ Dimensions

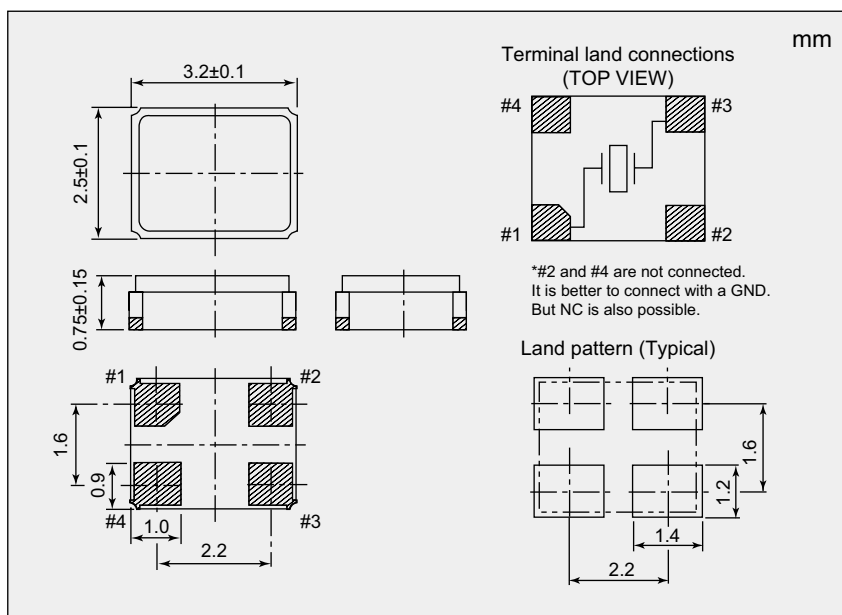

*1 Equivalent Series Resistance

| Nominal frequency (MHz) | Equivalent Series Resistance max. [Ω] |
|-------------------------|---------------------------------------|
| 9.840 to 12 | 200 |
| 12 to 13 | 100 |
| 13 to 20 | 80 |
| 20 to 50 | 50 |

Please specify the model name, frequency, and specification number when you order products. For further questions regarding specifications, please feel free to contact us.