



12±0.1

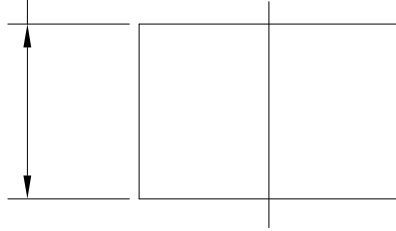

SPECIFICATION

SCOPE

- 1. Resonant Frequency 108±3kHz
- 2. Static Capacitance 220±20%pF at 1kHz
- 3. Resonant Impedance 50 Ω Max
- 4. Mechanical quality coefficient..... 300 Min
- 5. Piezoelectric strain constant 380x10⁻¹²C/N Min
- 6. Material P4

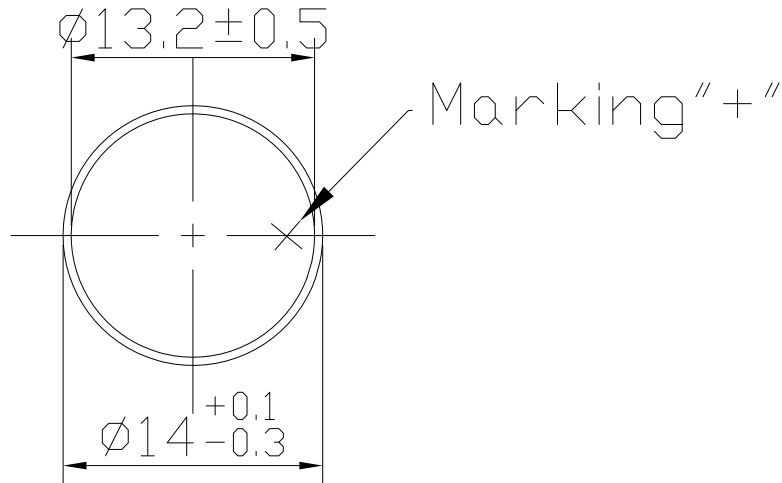

技术要求:

- 1, 产品符合欧盟环保要求。

				NINGBO VOISE ELECTRONICS CO.,LTD http://www.nbvoise.com	
No.	DESCRIPTION	APPROVED	DATE	Ultrasonic Piezoelectric Transducer	
TOLERANCES UNLESS NOTED OTHERWISE: .X ± .XX ± .XXX ± 90° FORMED +2° ANGLES -1°		APPROVALS	DATE	14x12	
FIRST ANGLE PROJECTION		CHECKED		UNIT mm	DWG NO. VS221008012
		APPROVED	22.10.8	SCALE	SHEET
				VER	1.0