

SPECIFICATION

FOR APPRONAL

Customer : _____

Product Name : Receiver _____

Model Name : VS1330R32 _____

Drawing No. : VS20230703007 _____

Signature of Voise

Approved by	Checkde by	Issued by	Date

 福爱斯电子有限公司
VOISE ELECTRONICS CO.,LTD.

Address:No 96 Mogao Dongqian Lake Industial Area ningbo,China,
Tel:0086-0574-87773030;Fax:0086-0574-87471600 P.C.315121
<http://www.nbvoise.com> Email:sales@nbvoise.com

Receiver		Page	3/7
Model No.:	VS1330R32	Revision No.	1.0
		Drawing No.	VS20230703007

1. Scope

This document contains required environmental, electrical, acoustic, mechanical, package and reliability test requirement

2. General Characteristics

- 2.1 Out-Diameter : 13 mm
- 2.2 Height : 3 mm
- 2.3 Weight : 1.5 g
- 2.4 Operating Temperature : -20~+50°C without loss of function
- 2.5 Store Temperature : -20~+60°C without loss of function



3. Electrical and Acoustic Characteristics.

Test condition : 15 ~ 35 °C Temp., 25% ~ 75% RH, 86~106 kPa Refer to IEC60268-1

No	Items	Specification
1	Impedance	32 Ω ± 15% (1Vrms at 1.2KHz)
2	Sound Pressure Level	96 dB ± 3dB (1mW at 1kHz)
3	Resonance Frequency(fo)	1000 Hz ± 20% without baffle 0.25V
4	Frequency Range	30Hz ~3.4KHz
5	Input Power	Rated 5 mW / Max. 10 mW
6	Distortion	Less than 5% at 1kHz/2Vrms
7	Buzz and Rattle	Should not be audible buzzes,rattles when the 0.4V sine wave signal swept at frequency range.
8	Polarity	When a positive DC current is applied to the voice coil terminal marked (+) , the diaphragm shall move to forward.

Receiver		Page	5/7
Model No.:	VS1330R32	Revision No.	1.0
		Drawing No.	VS20230703007






4. Measurement Method & Frequency Response curve

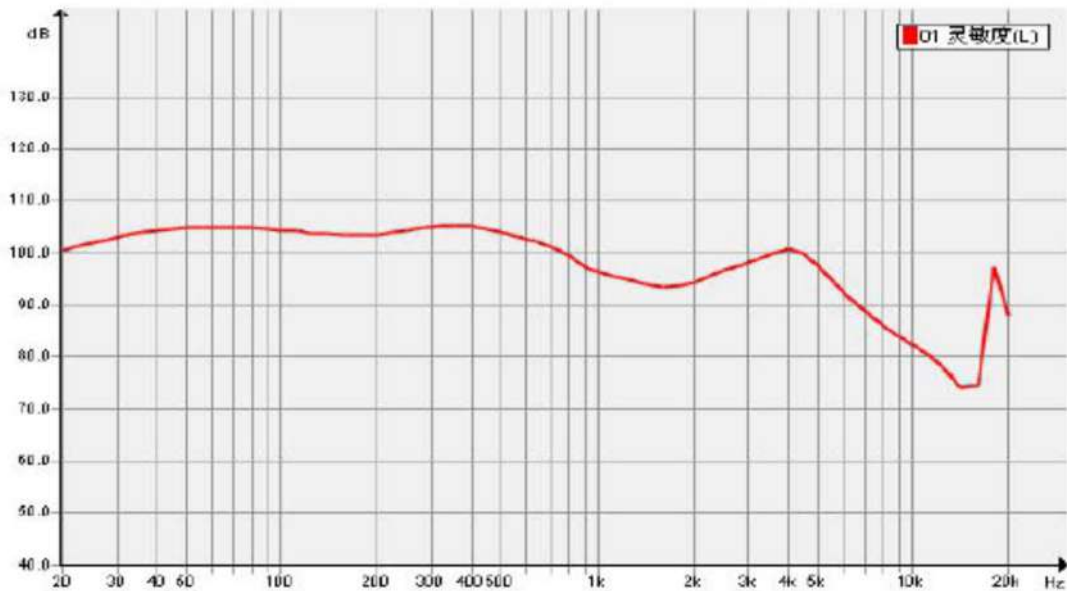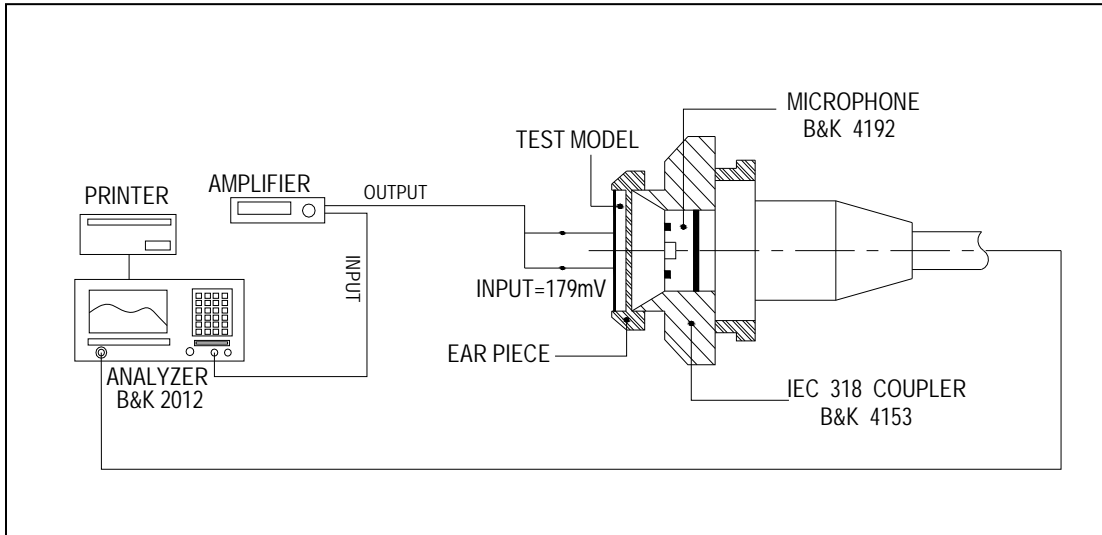

Brüel & Kjær

Receiver		Page	6/7
		Revision No.	1.0
Model No.:	VS1330R32	Drawing No.	VS20230703007

5. Dimensions

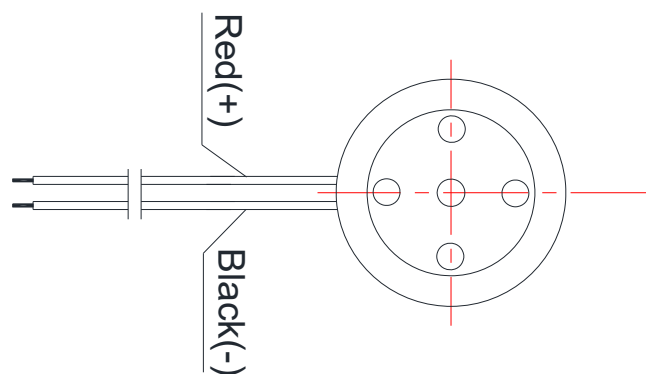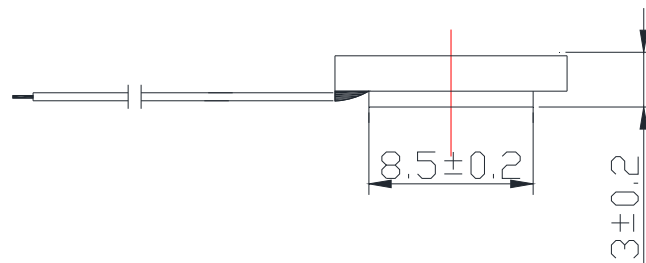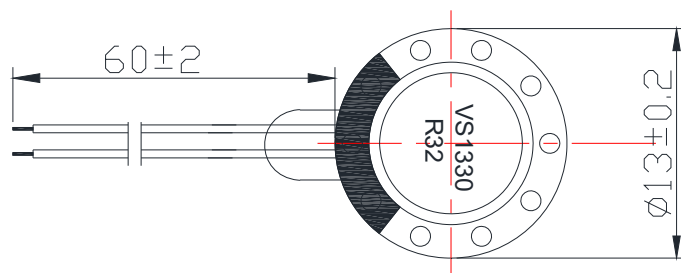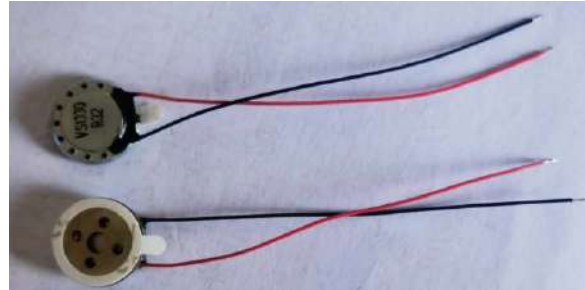

UNIT : mm

Tolerance : ±0.2