


## Specification for Speaker

Model No.	VSB62X16R8P1.5	Drawing No.	VS20200703012
Customer			

### SPEC

NO.	Items	Specification	Test Condition
1	Impedance	8Ω±15%	at 1Vrms,2kHz
2	Resonant Fr. (fo)	900Hz±20%	
3	Frequency Range	f0-20KHz	
4	Rated Power	1.5W	
5	Max Power	2W	
6	S.P.L.	80dB±3dB	(0.1W/0.1M at 0.8,1.0,1.2,1.5kHz Ave)
7	Distortion	<5% Max.	at 2kHz/2Vrms
8	Sweep Test	must be normal	at sine wave 4V
9	Load Test	after test meet item 8	rated white noise power, 96 Hrs.
10	Heat Test	after test meet item 8	+70±2°C 20~50% 96Hrs.
11	Cold Test	after test meet item 8	-30±3°C 96Hrs.
12	Humidity Test	after test meet item 8	+40±2°C,90~95% 96Hrs.
13	Weight	17±5%g	
14	Polarity Test	with positive D.C. voltage to (+) terminal, the cone shall move forward.	
15	Note		

### Frequency Response Curve

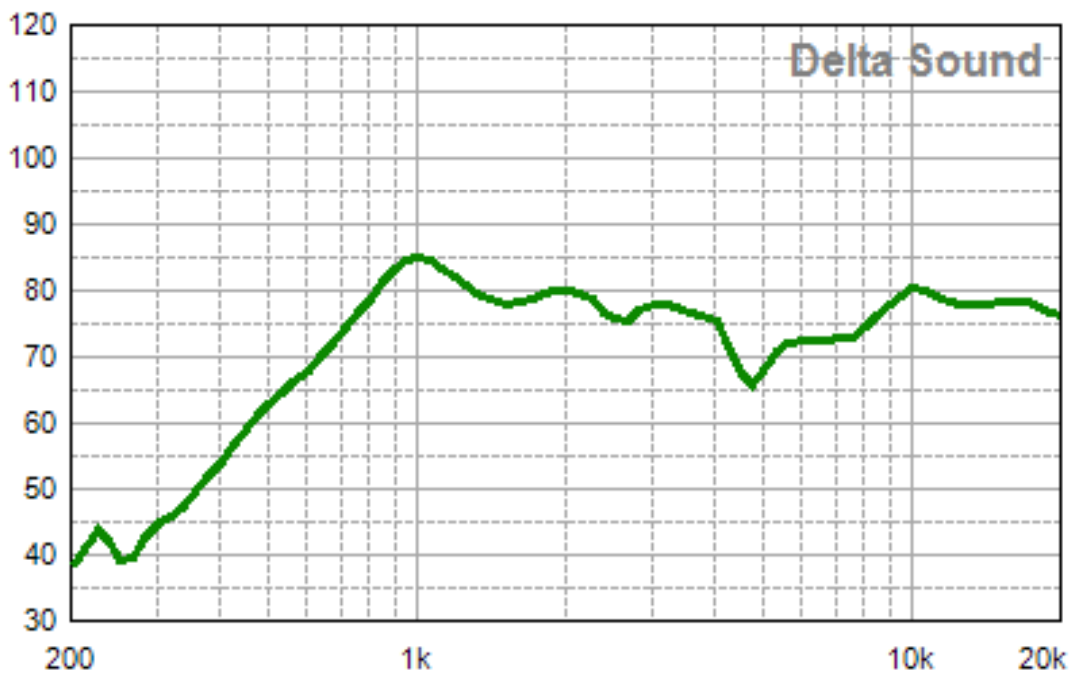



# Specification for Speaker

Model No. VSB62X16R8P1.5

Drawing No.

VS20200703012

Dimensions:

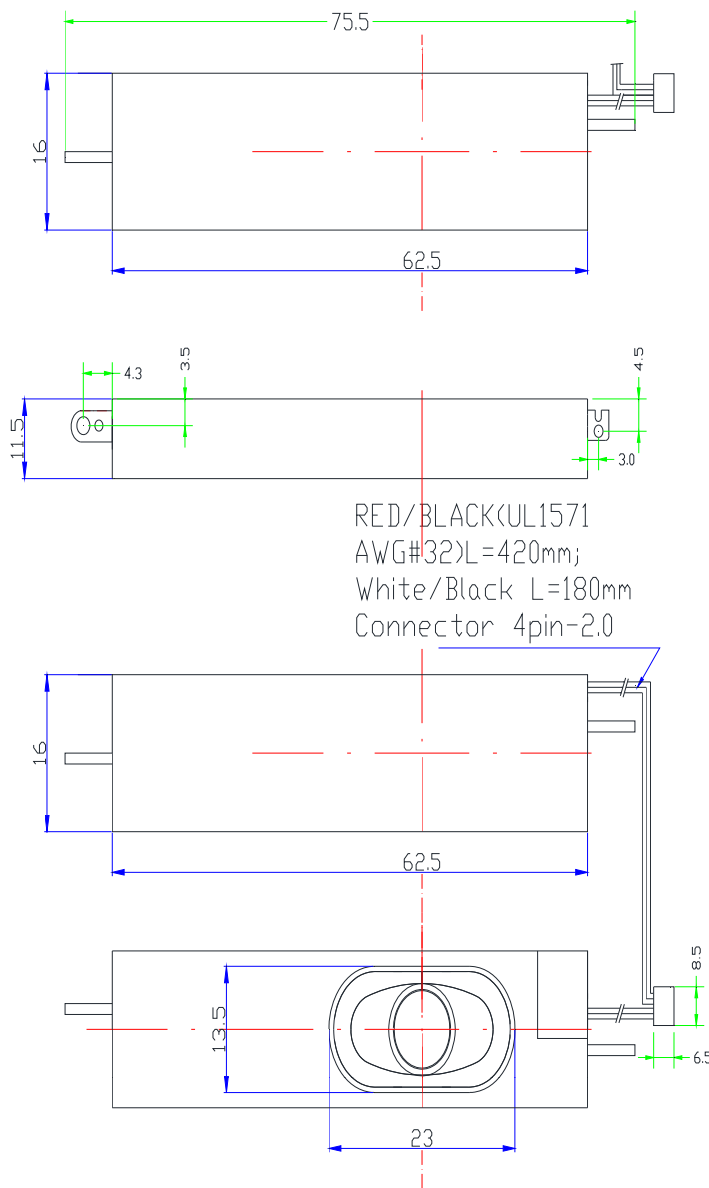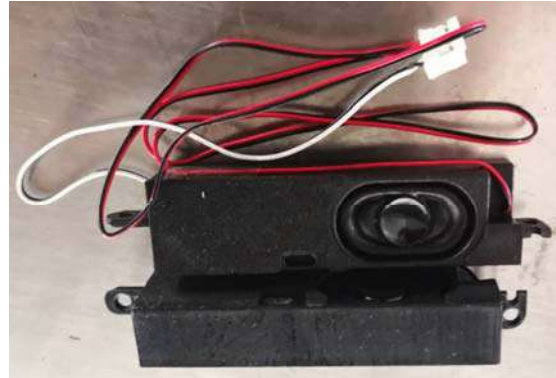

Unit : mm

Tolerance :  $\pm 0.2$