

Typical Application



QX-RS-360

Household Appliance

- Hair Dryer
- Corn Popper
- Massager

Office Automation Equipment

- Copy Machine

Carbon-brush motor


Output : Approx 1.0W ~ 40W

Model	Voltage		Free load		At Max. Efficiency			Stall Torque (g.cm)	
	Operating range	Nominal Voltage (V)	Speed (r.p.m.)	Current (A)	Speed (r.p.m.)	Current (A)	Torque (g.cm)		Output (W)
QX-360SA-4528	1.5~6	2.4	11000	1.10	8500	2.60	42	3.6	155
QX-360SA-2885	3~9	7.2	12400	0.38	11000	1.40	48	5.70	410
QX-360SA-10500	12~25	24	7200	0.06	5600	0.20	46	2.64	220
QX-360SA-1885	6~20	20	23200	0.24	18900	1.05	65	12.6	380
QX-360SA-12190	6.8~36	35	14500	0.13	12220	0.38	66	8.20	425

- Available in Metal or Nylon end-cap -

Dimensions

Unit: mm

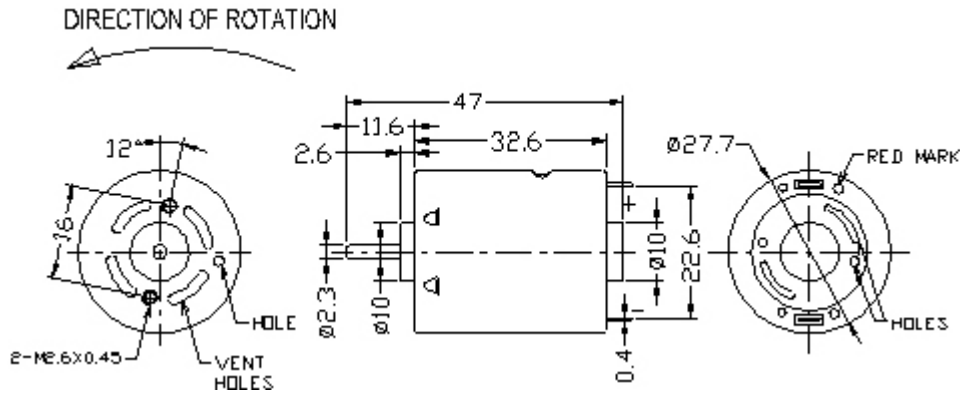

Weight: 50g (Approx)

Characteristic Curve

QX-RS-365-1885 20V

