


2SC4834
(TP8V40FS)

8A NPN

OUTLINE DIMENSIONS

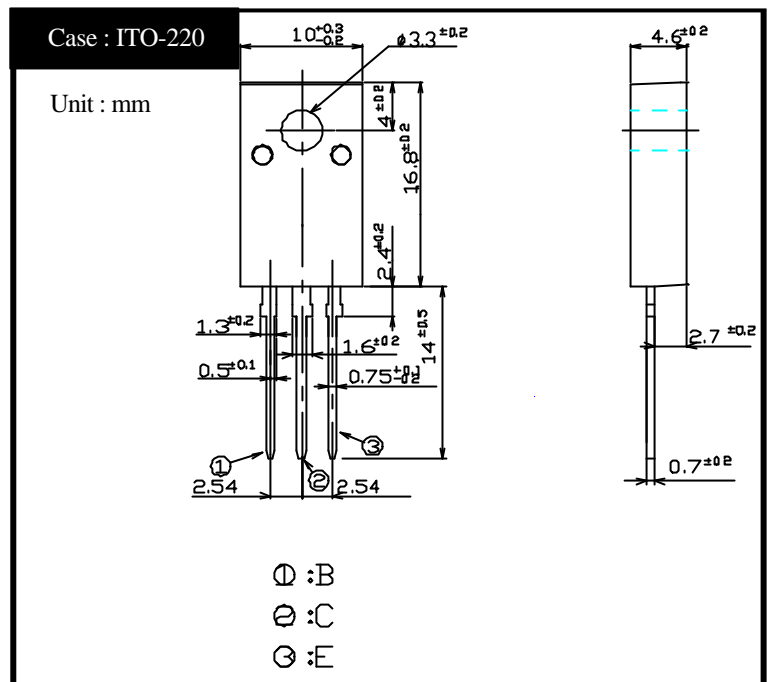

RATINGS

Absolute Maximum Ratings


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T _{stg}		-55 ~ 150	
Junction Temperature	T _j		150	
Collector to Base Voltage	V _{CB0}		500	V
Collector to Emitter Voltage	V _{CE0}		400	V
Emitter to Base Voltage	V _{EBO}		7	V
Collector Current DC	I _C		8	A
Collector Current Peak	I _{CP}		16	
Base Current DC	I _B		3	A
Base Current Peak	I _{BP}		6	
Total Transistor Dissipation	P _T	T _C = 25	45	W
Dielectric Strength	V _{dis}	Terminals to case, AC 1 minute	2	kV
Mounting Torque	TOR	(Recommended torque : 0.3N·m)	0.5	N·m

Electrical Characteristics (T_C=25)


Item	Symbol	Conditions	Ratings	Unit
Collector to Emitter Sustaining Voltage	V _{CE0(sus)}	I _C = 0.1A	Min 400	V
Collector Cutoff Current	I _{CB0}	At rated Voltage	Max 0.1	mA
			Max 0.1	
Emitter Cutoff Current	I _{EBO}	At rated Voltage	Max 0.1	mA
DC Current Gain	h _{FE}	V _{CE} = 2V, I _C = 4A	10 ~ 25	
			h _{FEL}	
Collector to Emitter Saturation Voltage	V _{CE(sat)}	I _C = 4A	Max 1.0	V
Base to Emitter Saturation Voltage	V _{BE(sat)}	I _B = 0.8A	Max 1.5	V
Thermal Resistance	θ _{JC}	Junction to case	Max 2.78	/W
Transition Frequency	f _T	V _{CE} = 10V, I _C = 0.8A	TYP 13	MHz
Turn on Time	t _{on}	I _C = 4A	Max 0.3	μs
Storage Time	t _s	I _{B1} = 0.8A, I _{B2} = 1.6A	Max 1.3	
Fall Time	t _f	R _L = 37.5 , V _{BB2} = 4V	Max 0.1	

2SC4834

$h_{FE} - I_C$

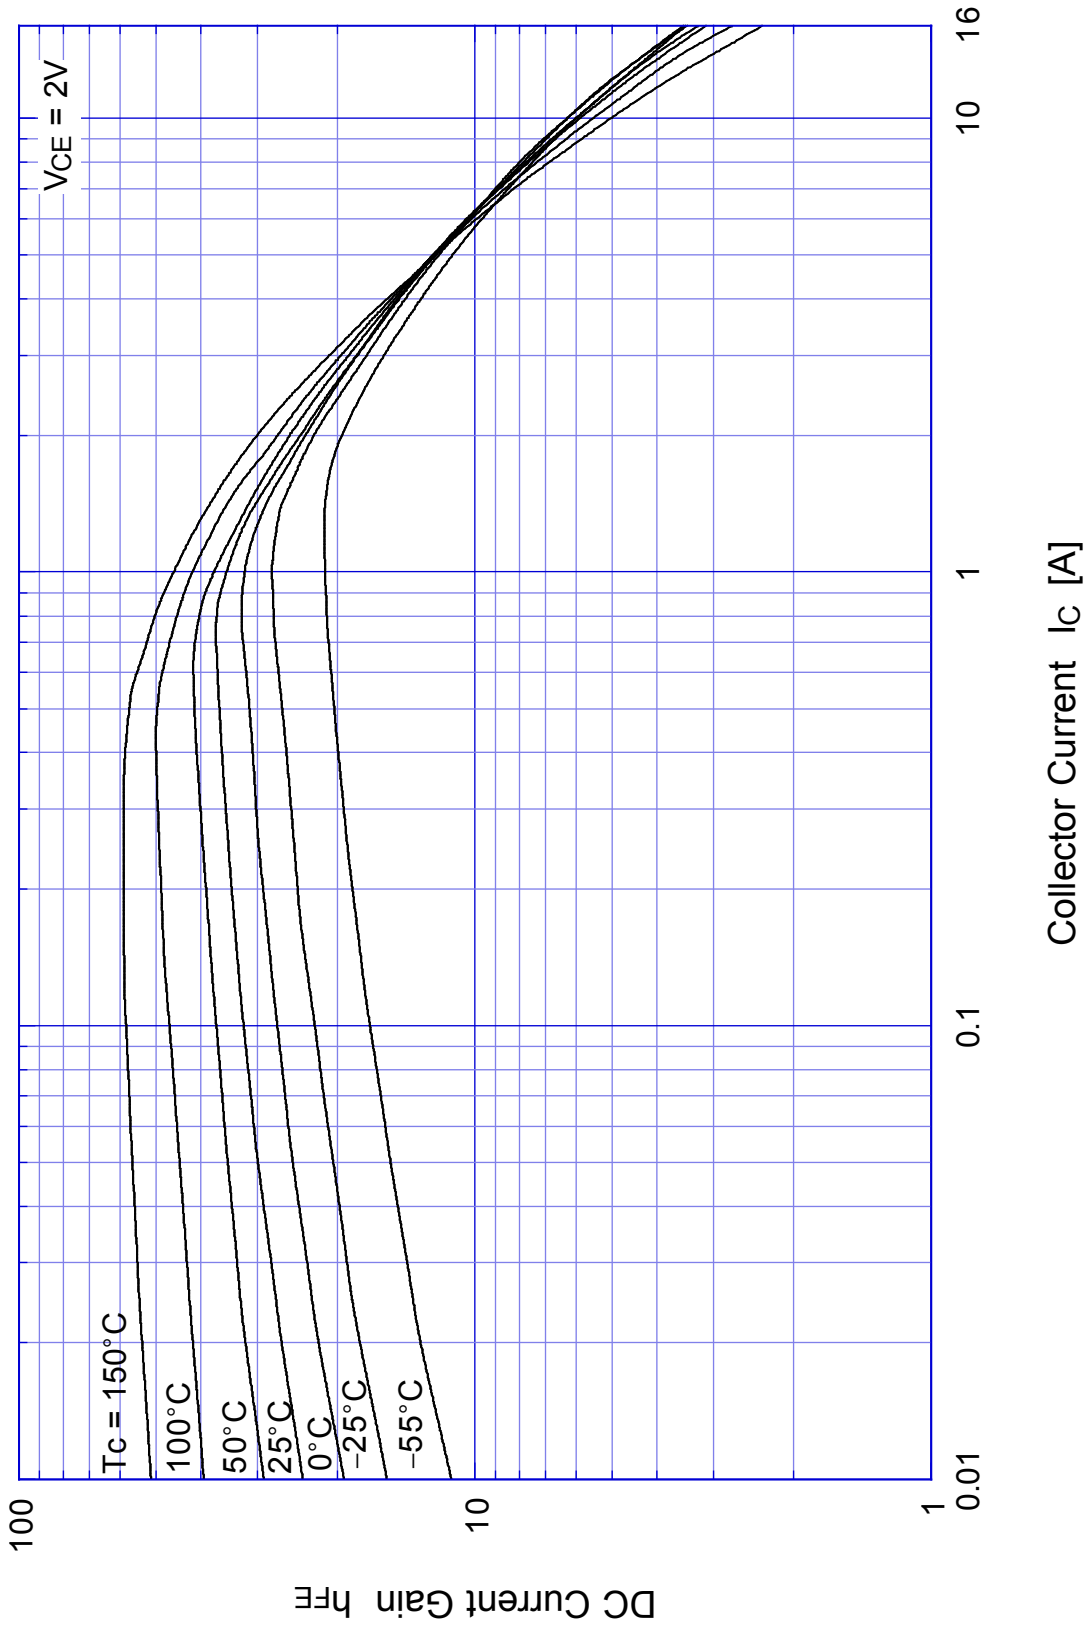


2SC4834 Saturation Voltage

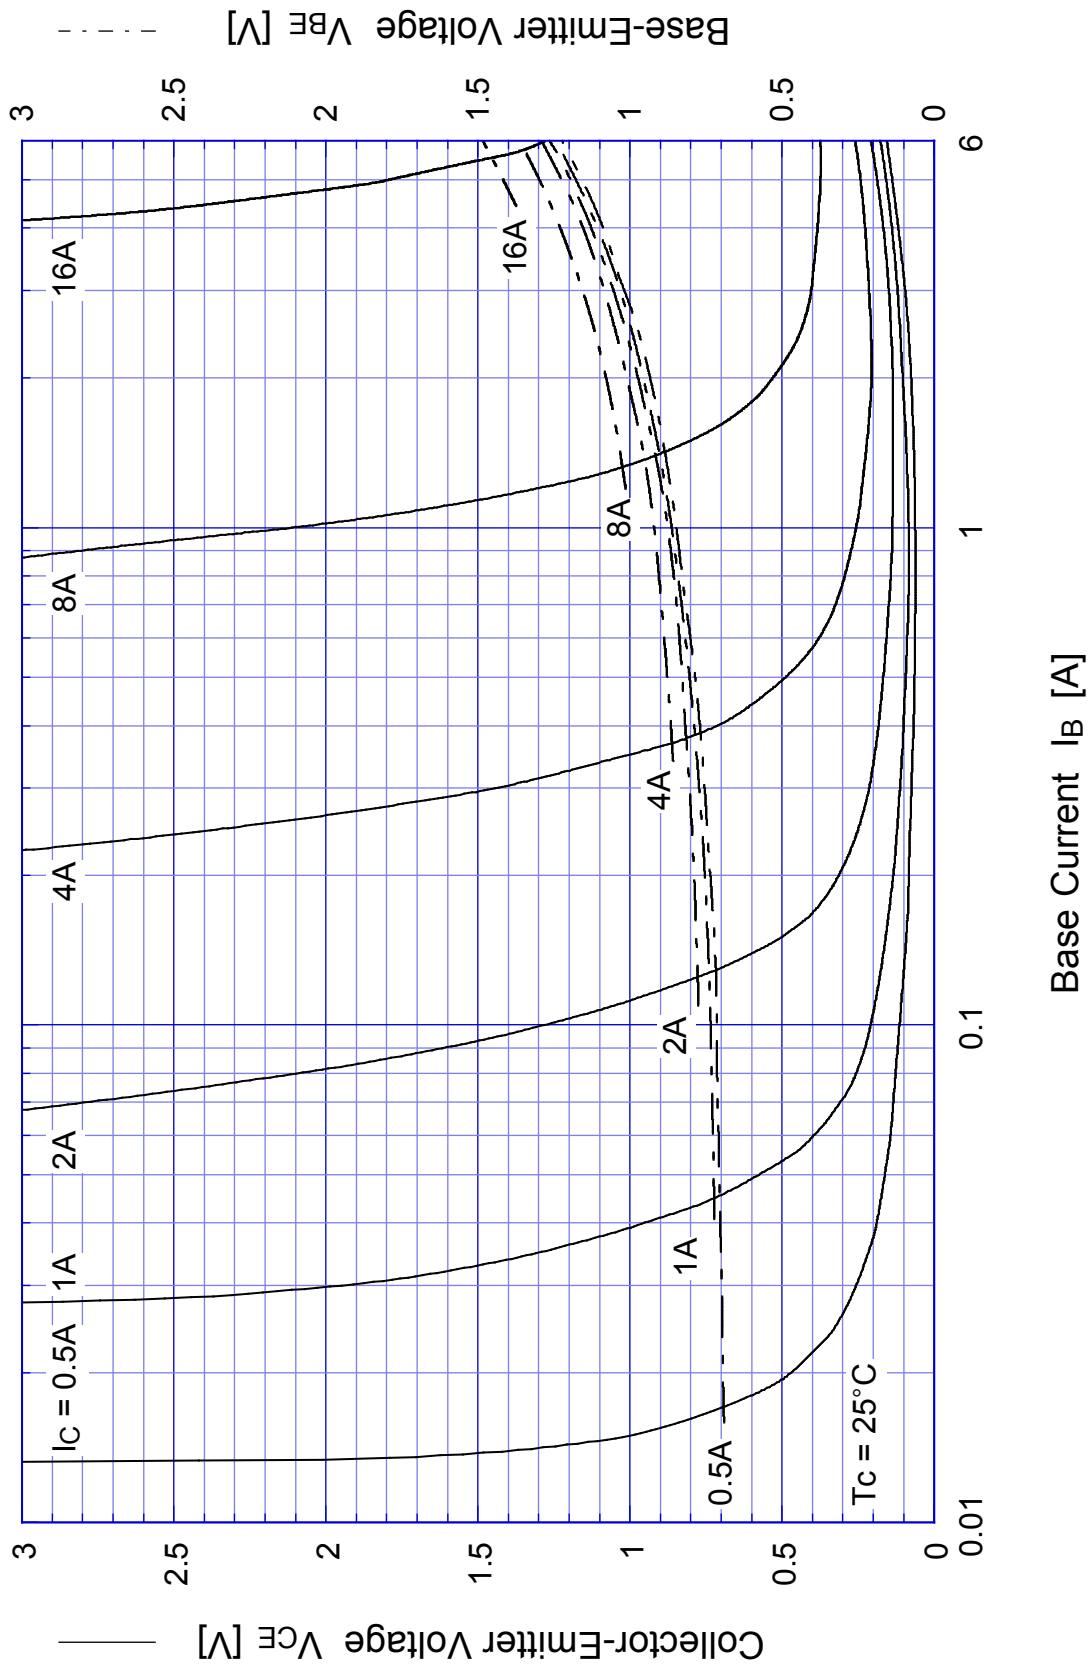


2SC4834

Switching Time - I_C

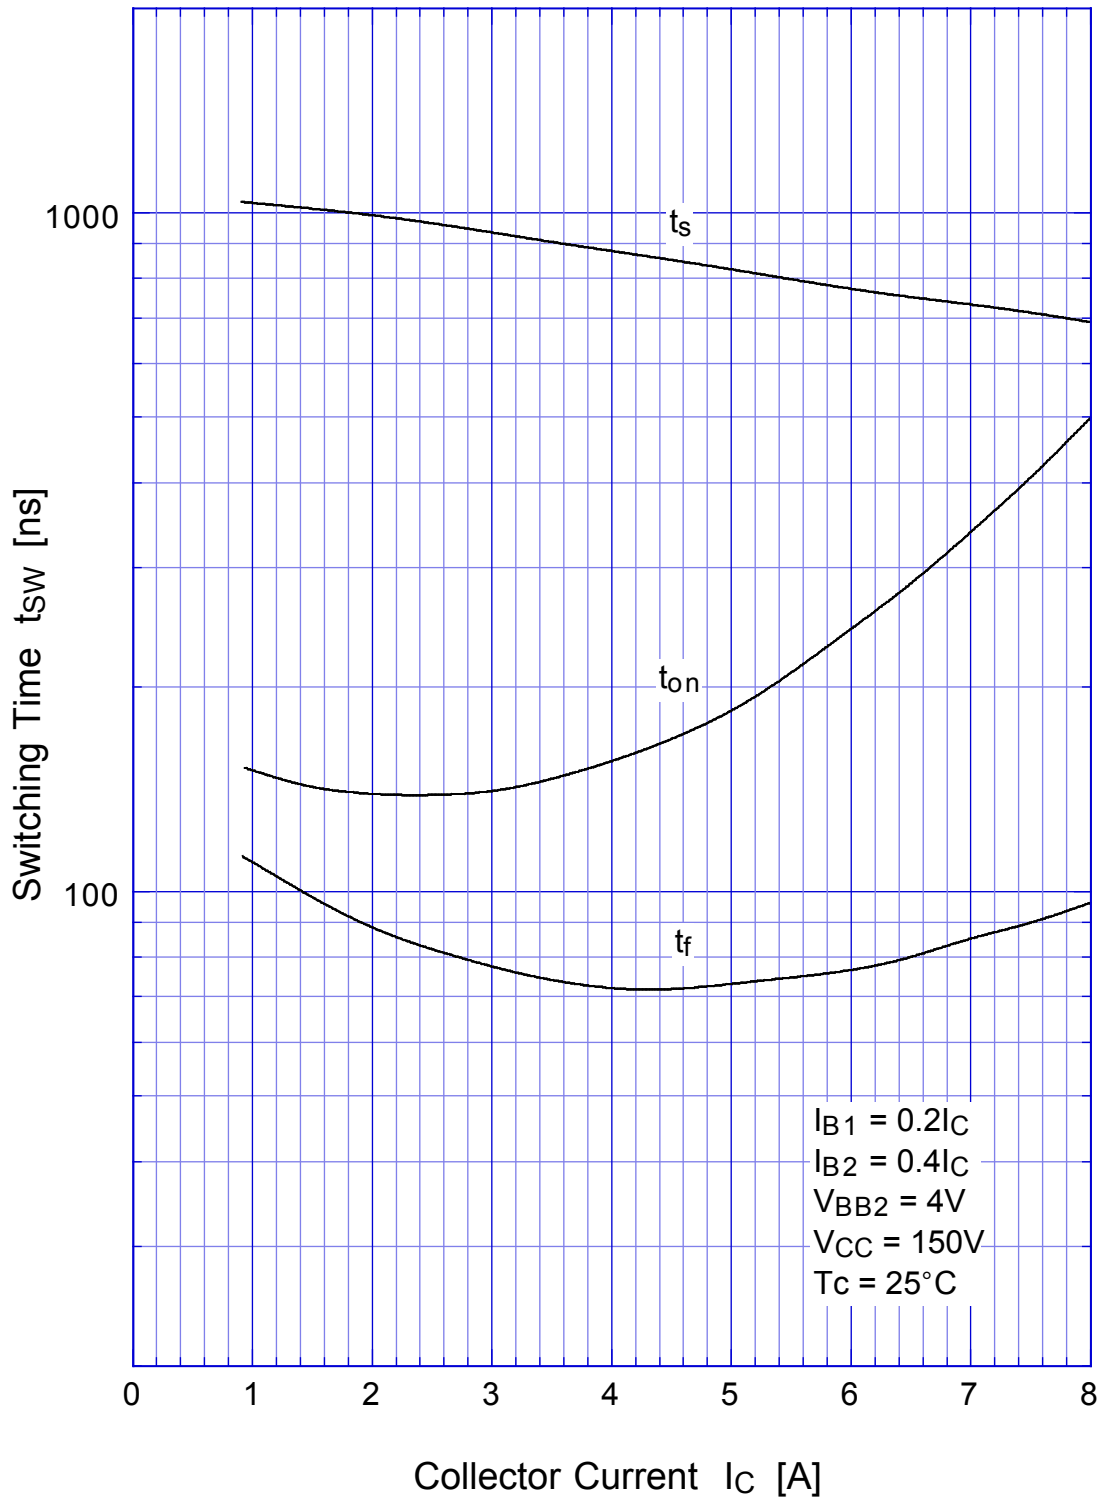


2SC4834

Switching Time - Tc

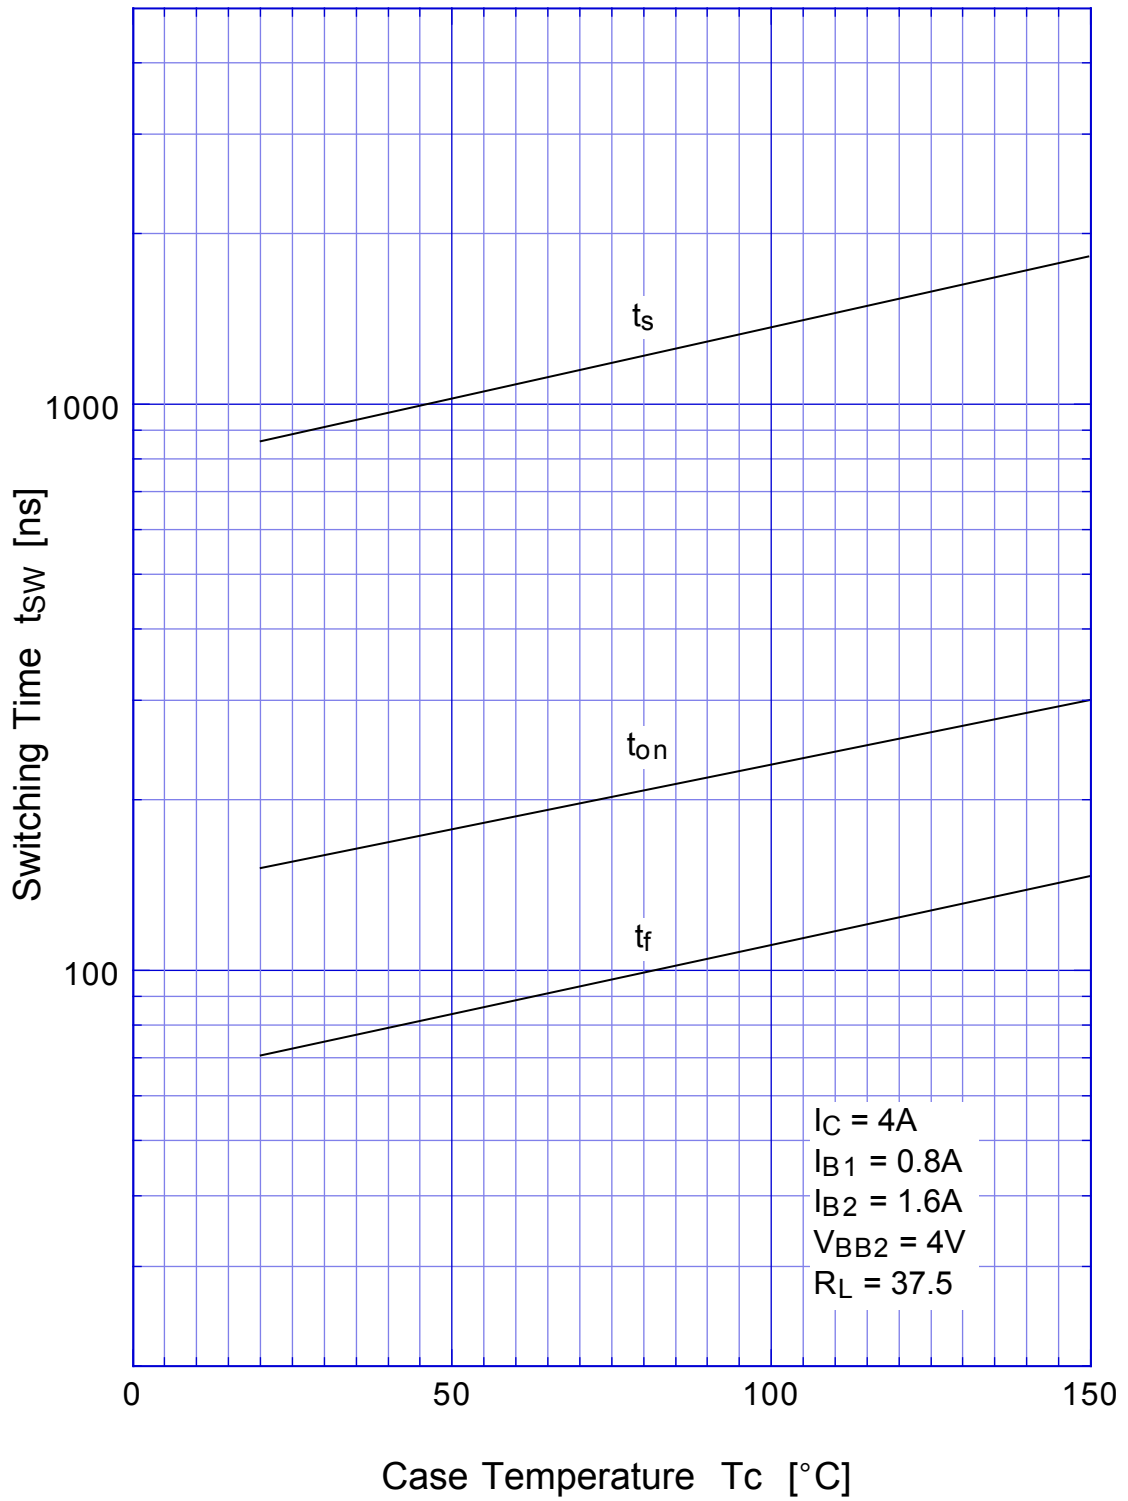


2SC4834

Forward Bias SOA

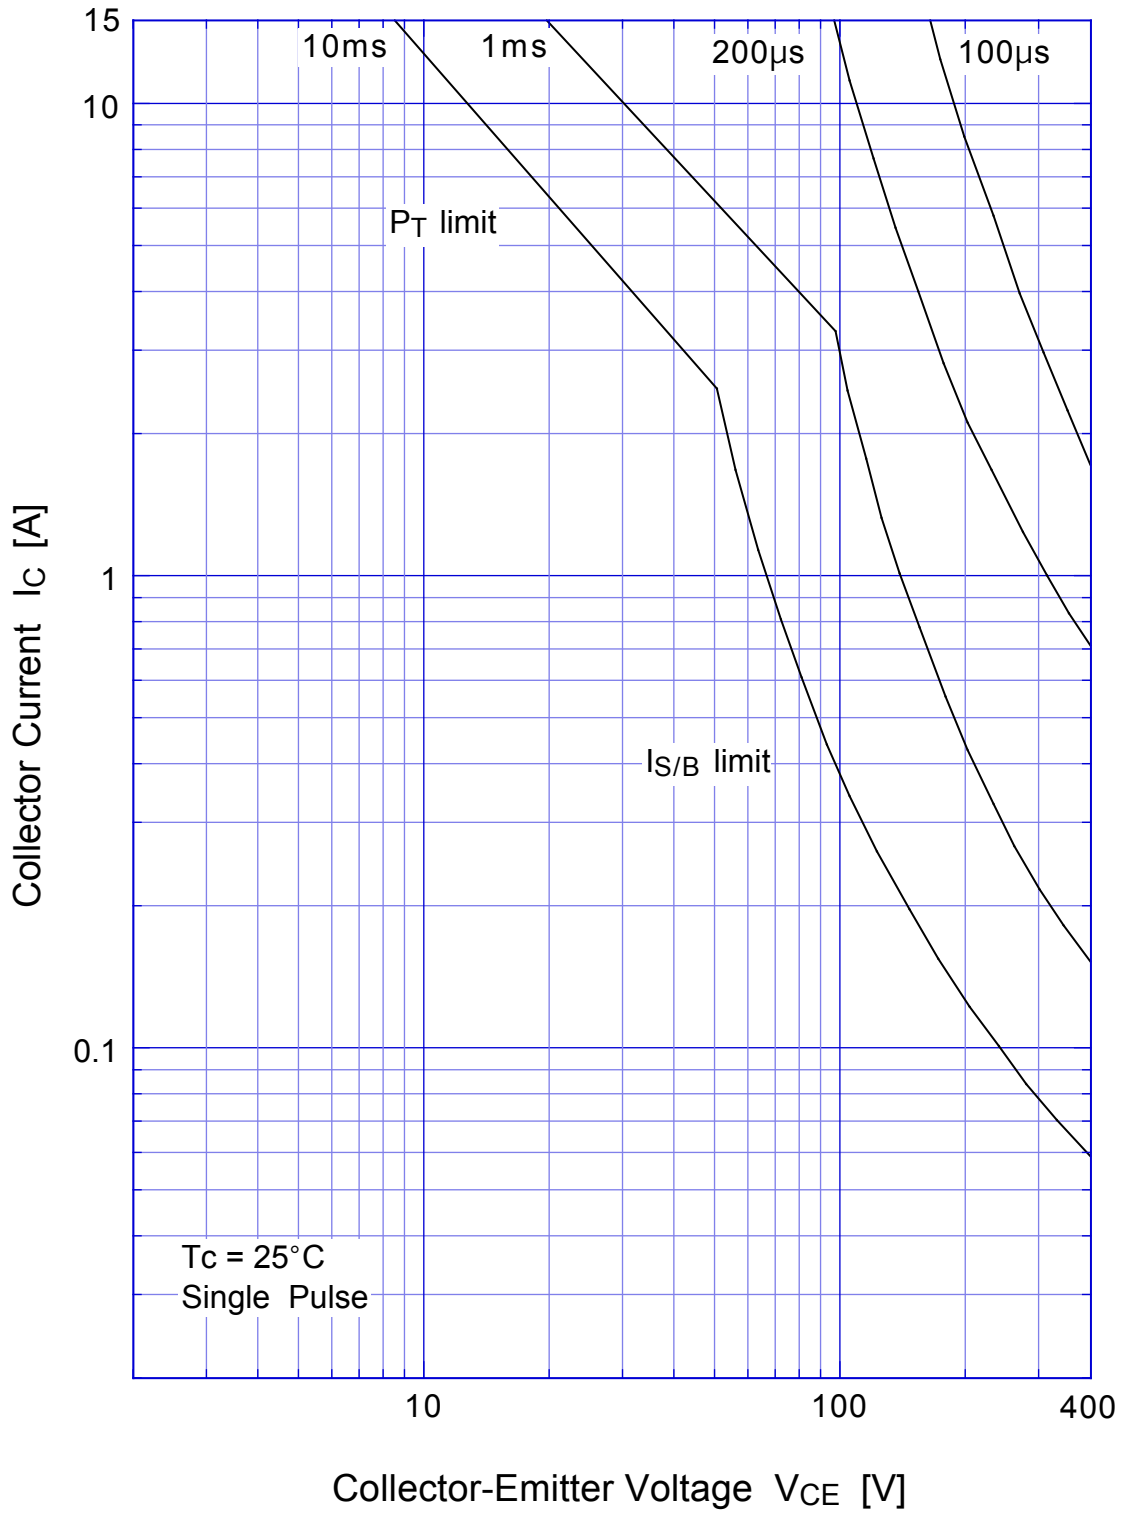


2SC4834 Collector Current Derating

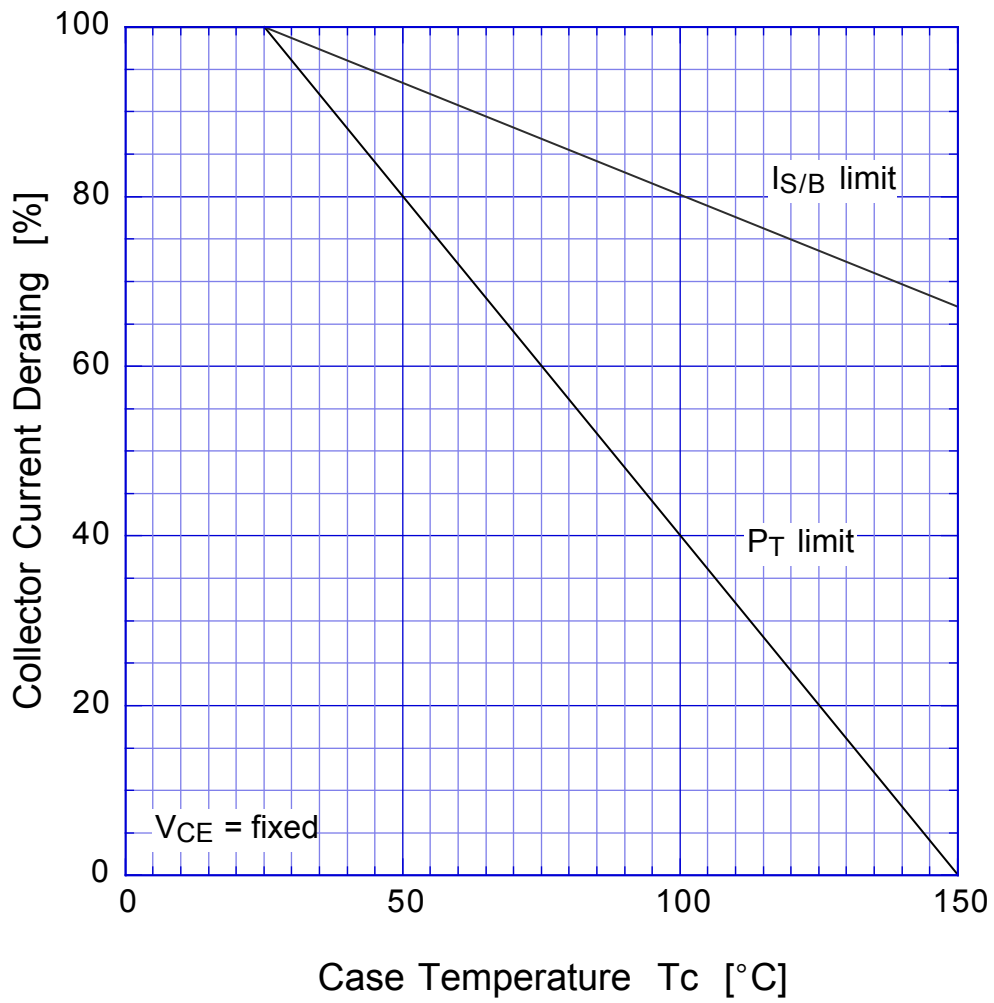


2SC4834

Reverse Bias SOA

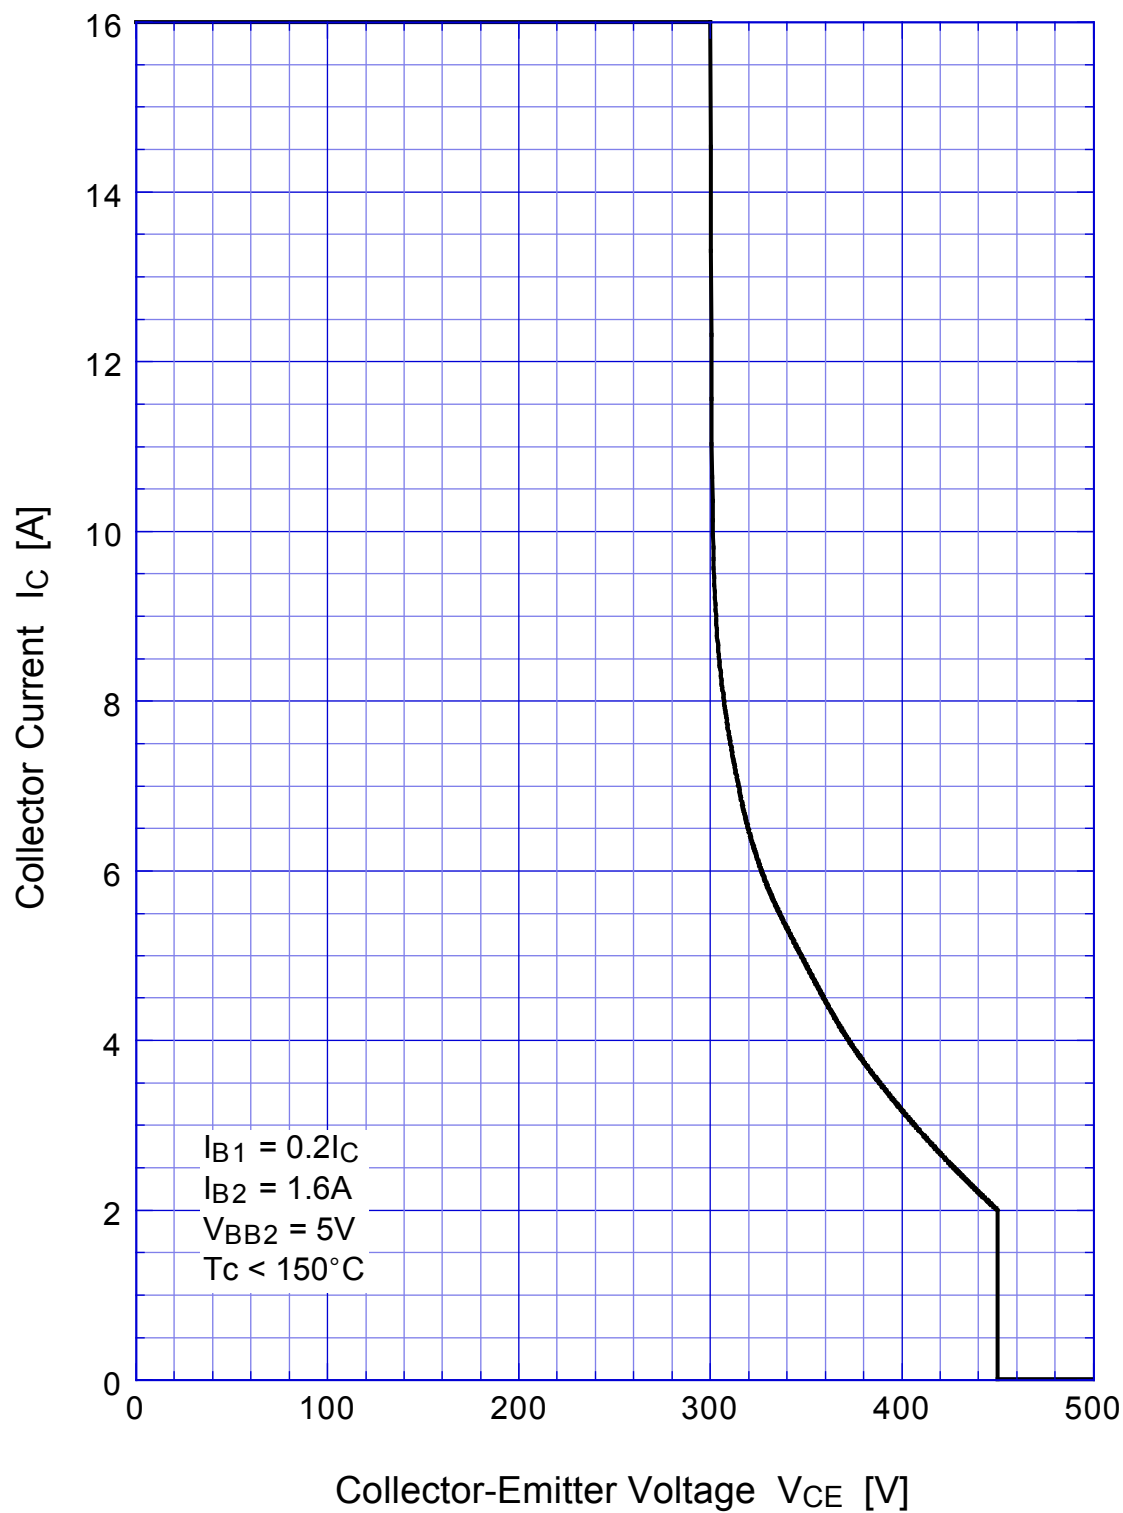

2SC4834 Transient Thermal Impedance

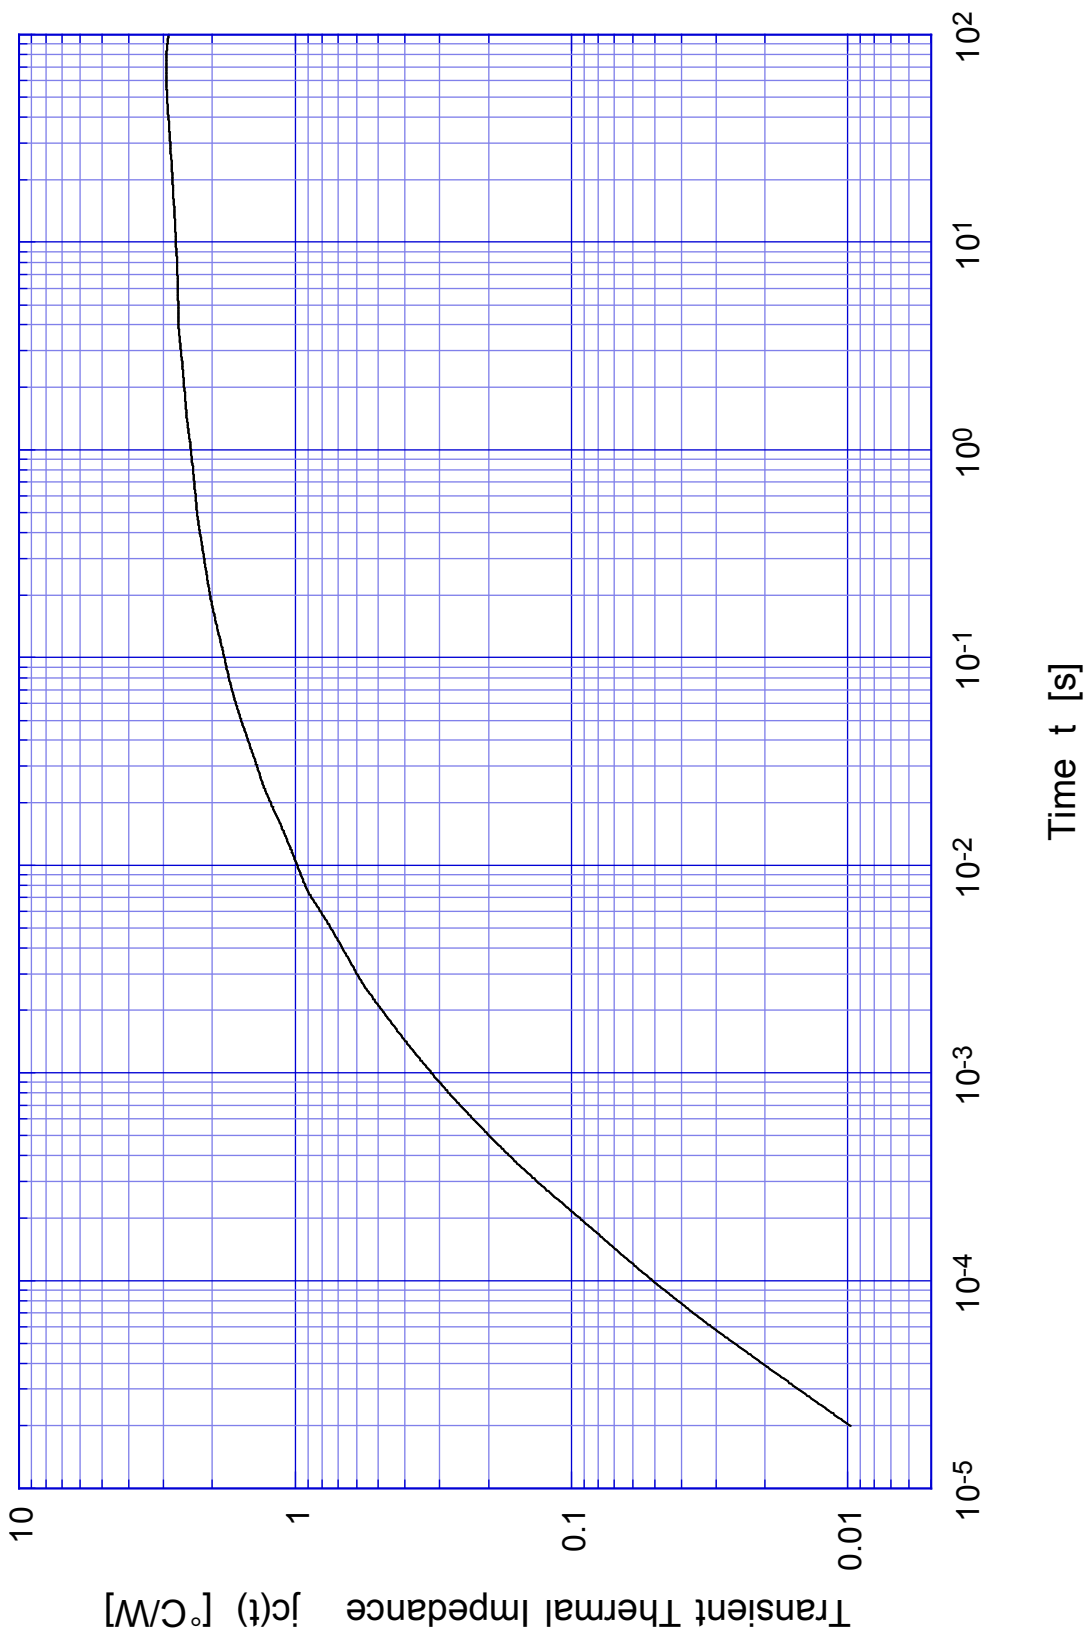

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.