

SPECIFICATION

受 控

1. SCOPE

This specification is applied to the piezo-element.


2. SPECIFICATION

(at 25°C)

2.1 Resonant Frequency	:	1.3±0.2 kHz
2.2 Resonant Resistance	:	120 Ω max
2.3 Capacitance	:	150nf ~ 200nf at 100Hz
2.4 Input Voltage	:	30Vp-p max
2.5 Operating Temperature	:	-30~+85°C
2.6 Storage Temperature	:	-40~+90°C
2.7 Insulation Resistance (at 10VD.C.)	:	100M Ω min.

3. DIMENSION

as per figure

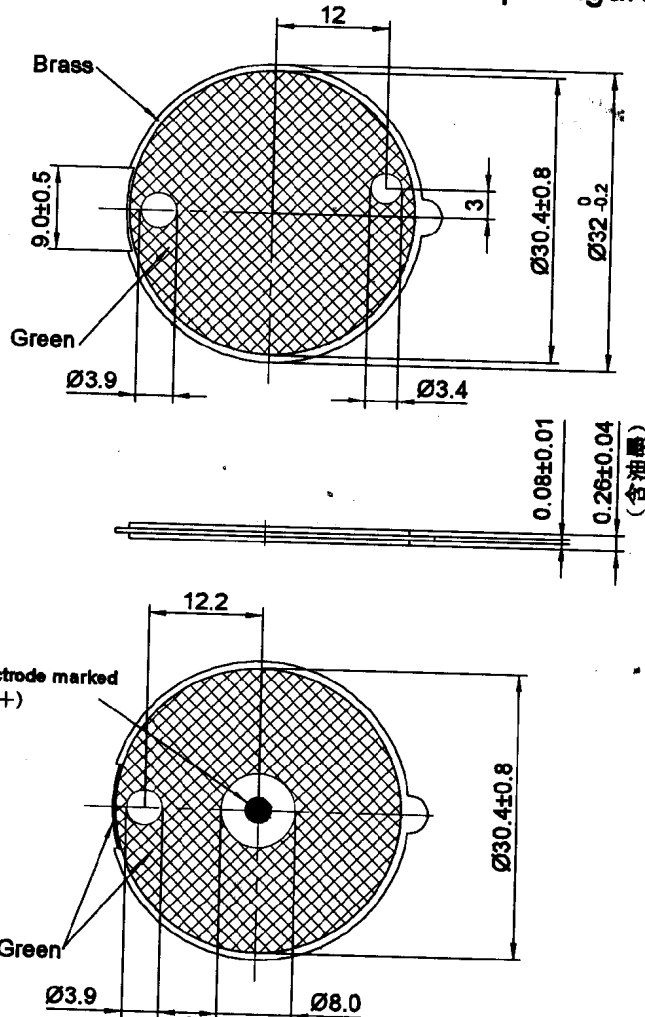

TOLERANCES UNLESS NOTED OTHERWISE

X ±
.XX ±
.XXX ±

90° FORMED +2°
ANGLES -1°

FIRST ANGLE PROJECTION



DRAWN		KEPO MODEL NO.	CUSTOMER		
DESIGN		FT-32T-1.3AS	CUSTOMER NO.		
CHECKED		DWG NO.			
APPROVED		KC3.001.335.01	VER	1.0	SCALE
DATE	15.08.03		UNIT	mm	SHEET
CONTRACT NO.					
AGENCY APPROVAL		Ningbo Kepo Electronics Co.,Ltd. TEL:(+86)574-88370330 FAX:(+86)574-88370329			